


## Environmental and Social Impact Assessment for the Construction/ Rehabilitation of the National TB Reference Laboratory and Five Satellite Laboratories in Uganda

Project area: Mbale Regional Referral Hospital

(Reference No.: MoH-EAPHLNP/SRVCS/2010-11/00006)

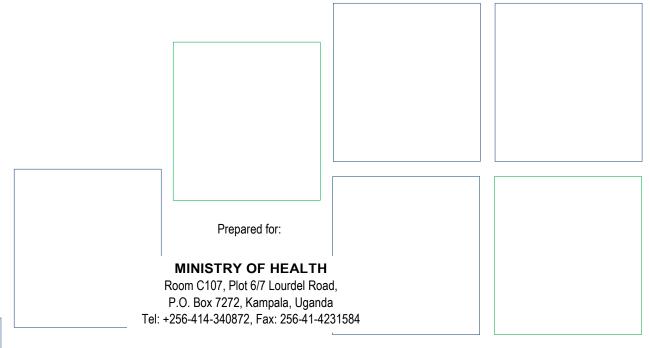

By:

#### AIR WATER EARTH (AWE) LTD

Environmental, Civil Engineers & Project Management Consultants M1, Plot 27 Binayomba Road, Bugolobi P. O. Box 22428, Kampala, UGANDA.
Tel: 041-4268466, Mob: 078-2580480/ 077-2496451

Email: mail@awe-engineers.com Website: www.awe-engineers.com





August 2014



## Consultants

In conformity to NEMA (Uganda) requirements, this ESIA was prepared under Air Water Earth's EIA partnership "AWE Environmental Engineers" by consultants below:

Name and Qualifications	Role	Signature
Lead Consultants:		
Eng. Lammeck KAJUBI  BSc Eng. (1.1 Hons) MAK, MEngSc (Env) (UQ-Queensland).  NEMA Certified/Registered Environmental Practitioner  Registered Professional Environmental Engineer	Team Leader/ Environmental Engineer	
KALIBBALA Herbert Mpagi PhD (KTH-Sweden), MSc. Environmental Eng. (Mak), BSc. Civil Engineering (Mak,Uganda) NEMA Certified/Registered Environmental Practitioner	Civil Engineer/ Infrastructure specialist	
TASHOBYA Pamela  BA Environmental Management (Hons) (Mak,Uganda),  MSc. Developmental Management (Agder University College Norway).  NEMA Certified/Registered Environmental Practitioner	Sociologist	
OYEN Ben David  B. Environmental Engineering & Management (KYU)  NEMA Certified/ Registered EIA Practitioner	Environmental Engineer	
Contributing consultants:		
KIRABIRA John Baptist PhD (KTH-Sweden)	Incineration consultant	
NAKIGOZI Sharifah  MSc. Safety, Health and Environment (University of Technology, Malaysia); BSc. Conservation Biology (Mak, Uganda),	Health, Safety and Envir	onmental consultant
KIBUUKA Ivan B. Technology (Open University, UK)	Field/ Research Staff	

### Acronyms, units and definitions

#### **Acronyms**

CHD: Community Health Department

ESIA: Environmental & Social Impact Assessment
ESIS: Environmental & Social Impact Statement
ESMP: Environmental and Social Management Plan

GH: General Hospital(s)

GIS: Geographical Information Systems

GOU: Government of Uganda

HC: Health Centre (e.g. HC IV, HC III, HC II)

HCF: Healthcare Facility/ Facilities

HCW: Healthcare Waste
HSD Health Sub-District

HSSPII: Health Services Support Project II

LC: Local Council

IP/PAP: Interested Parties / project-affected people

MOH: Ministry of Health

NEMA: National Environment Management Authority NWSC: National water & Sewerage Corporation

NHS: National Health System OPD: Out Patient Department

PCDP: Public Consultation and Disclosure Plan

PFP: Private for Profit
PHC: Primary Health Care
PHP: Private Health Provider
PID: Photo-Ionization Detector

PMTCT: Prevention of Mother to Child Transmission

PNFP: Private Not for Profit

RRH: Regional Referral Hospital(s)
TASO: The Aids Support Organisation

TB: Tuberculosis

TCMP: Traditional and Complimentary Medicine Practitioner

TOR: Terms of Reference

UBOS: Uganda Bureau of Statistics

UNFPA: United Nations Fund for Population Activities
UNMHCP: Uganda National Minimum Healthcare Package

VCT: Volume Computed Tomography

VHT: Village Health Team

WB: World Bank

WHO: World Health Organization

#### Units of measures

Ha: hectare km: kilometre m: metre

#### **Definitions:**

Dioxins or Polychlorinated dibenzodioxins (PCDDs):

These are a group of polyhalogenated compounds which are known to be potent human carcinogens (cancer-causing chemical compounds). Dioxins can occur as by-products of incineration of chlorine-containing substances such as chlorine-

containing plastics.

**Incineration:** This is a waste treatment technology that involves combustion of organic materials

and/or substances converting them into incinerator bottom ash, flue gases, and particulates. Flue gases may contain significant amounts of particulate matter, heavy metals, dioxins, furans, sulphur dioxide and hydrochloric acid. Flue gases should

therefore be cleaned before they are dispersed in the atmosphere.

Infectious waste: This is the portion of medical waste that can transmit disease. On average about 10-

15 percent of medical waste is actually infectious waste. Infectious waste comprises five categories: cultures and stocks, human pathological waste, human blood and

blood products and sharps.

Hazardous waste: Shares the properties of a hazardous material (for example, ignitability, corrosivity,

reactivity or toxicity), or other physical, chemical, or biological characteristics that may pose a potential risk to human health or the environment if improperly

managed.

**Hospital waste:** All solid waste, both biological and non-biological, that is produced at a hospital and

is discarded without further use.

Medical waste: Materials generated as a result of patient diagnosis and/or treatment or the

immunization of human beings.

Solid (non-hazardous)

wastes:

Generally include any garbage, refuse. Examples of such waste include domestic trash and garbage; inert construction / demolition materials; refuse, such as metal

scrap and empty containers (except those previously used to contain hazardous

materials which should, in principle, be managed as a hazardous waste).

# Contents

C	Consultants	iii
Α	Acronyms, units and definitions	v
Li	List of tables	xi
L	List of figures	xi
L	List of photographs	xii
E	Executive Summary	xiii
1	1 INTRODUCTION	1
	1.1 PROJECT BACKGROUND	1
	1.2 OVERVIEW OF UGANDA'S HEALTH SECTOR	1
2	2 PROJECT DESCRIPTION	4
	2.1 PROPONENT CONTACT	4
	2.2 LOCATION OF PROJECT SITE	4
	2.3 PROJECT OBJECTIVES	5
	2.4 PROJECT COMPONENTS	5
	2.5 PROJECT ALTERNATIVES	9
	2.5.1 'No Project' Scenario	9
	2.5.2 "Action" Scenario Alternatives Considered	9
	2.6 PROJECT CLASSIFICATION FOR ESIA PURPOSES	10
	2.6.1 Classification according to Uganda's National Environment Act, Cap 153	
	2.6.2 Project Classification according to World Bank	
3		
	3.1 INTRODUCTION	12
	3.2 ESTABLISHMENT OF ENVIRONMENTAL & SOCIO-ECONOMIC BASELINE CONDITIONS	
	3.3 CONSULTATION AND PROJECT DISCLOSURE	
	3.4 REVIEW OF POLICY, REGULATIONS, INSTITUTIONAL FRAMEWORK & INTERNATION, 14	AL GUIDELINES
	3.5 IMPACT IDENTIFICATION AND ANALYSIS	14
	3.5.1 Impact Description	14
	3.5.2 Impact Evaluation	
	3.5.3 Impact Significance	
	3.6 CUMULATIVE IMPACTS	
	3.7 MITIGATION OF ENVIRONMENTAL IMPACTS	
4	4 ENVIRONMENT AND SOCIO-ECONOMIC BASELINE	17
	4.1 INTRODUCTION	17

	4.2 EN	VIRONMENT PROFILE	17
	4.2.1	Climate	17
	4.2.2	Air	17
	4.2.3	Noise	18
	4.2.4	Water Resources and Drainage	18
	4.2.5	Geology, Geomorphology and Soils	18
	4.3 SO	CIO-ECONOMIC AND LAND USE ACTIVITIES	20
	4.3.1	Administrative Structure	20
	4.3.2	Employment	21
	4.3.3	Land Tenure and Use Activities	21
	4.3.4	Population and Demographic Characteristics	21
	4.3.5	Level of Education and Literacy	23
	4.3.6	Healthcare Services	23
	4.3.7	Household Characteristics, Livelihoods and Poverty Level	24
	4.3.8	Water Supply	25
	4.3.9	Waste Management	27
5	POLIC	CY, LEGAL AND INSTITUTIONAL FRAMEWORK	30
	5.1 INT	RODUCTION	30
	5.2 PO	LICY FRAMEWORK	30
	5.2.1	The National Environment Management Policy, 1994	30
	5.2.2	The National Medical Equipment Policy, 2009	30
	5.2.3	The National Health Policy, 1999	31
	5.2.4	National Policy on Injection Safety and Health Care Waste Management, 2004	31
	5.3 LEC	GAL FRAMEWORK	31
	5.3.1	Constitution of the Republic of Uganda, 1995	31
	5.3.2	National Environment Act, Cap 153	31
	5.3.3	Local Governments Act, Cap 243	32
	5.3.4	Public Health Act, Cap 281	33
	5.3.5	National Environment (Standards for Discharge of Effluent into Water or on Land) Regulations, 1999.	33
	5.3.6	National Environment (Noise Standards and Control) Regulations, 2003	33
	5.3.7	National Environment (Waste Management) Regulations, 1999	35
	5.3.8	Draft National Air Quality Standards, 2006	35
	5.3.9	Employment Act, 2006	35
	5.3.10	Occupational Safety and Health Act (2006)	36
		TITUTIONAL FRAMEWORK	
	5.4.1	National Environmental Management Authority (NEMA)	36
			36

	5.4.3	Ministry of Gender, Labour & Social Development	37
	5.4.4	District Local Administration Structures	37
	5.5 WC	RLD BANK GROUP POLICIES AND GUIDELINES	37
	5.5.1	World Bank Operating Policies	37
	5.5.2	WB Guidelines	38
	5.6 CO	MPARISON OF UGANDA STANDARDS AND WBG REQUIREMENTS	48
	5.7 WC	RLD HEALTH ORGANISATION (WHO) GUIDELINES	48
	5.8 WH	O BIOSAFETY GUIDELINES: "FACILITY DESIGN"	48
6	POTE	NTIAL SOCIO-ENVIRONMENTAL IMPACTS	52
	6.1 INT	RODUCTION	52
	6.2 CO	NSTRUCTION-PHASE IMPACTS	52
	6.2.1	Positive Impacts	52
	6.2.2	Negative Impacts	52
	6.3 OP	ERATION PHASE IMPACTS	61
	6.3.1	Positive Impacts	61
	6.3.2	Negative Impacts	62
7	KEY S	STAKEHOLDER VIEWS	67
8	ENVII	RONMENTAL-SOCIO MANAGEMENT PLAN (ESMP)	68
	8.1 INS	TITUTIONAL ARRANGEMENTS	68
	8.2 GR	IEVANCE MECHANISM	70
9	CONC	CLUSION	88
R	EFEREN(	CES	89
A	PPENDIX	A: STAKEHOLDER ENGAGEMENT	91
A	PPENDIX	B: ASSESSMENT REPORT ON INCINERATORS	96
A	PPENDIX	C: PROJECT ARCHITECTURAL DRAWINGS	99
ΔΙ	PPFNDIX	D: TERMS OF REFERENCE FOR THE ESIA	102



# List of tables

Table ES1: Impact monitoring & management plan	XX
Table 2.1: Requirements and specifications for space and safety for the proposed laboratory	5
Table 2.2: General considerations for the proposed laboratory features	6
Table 3.1: Classification of impact evaluation	15
Table 3.2: Determination of impact severity	16
Table 4.1: Air quality at the proposed project site	18
Table 4.2: Levels of noise at the proposed project site	
Table 4.3: Wards and Cells of Mbale Municipal Council	20
Table 4.4: Mbale municipal population distributions by division	
Table 4.5: Population projections (2004 – 2012) for Mbale Municipality	23
Table 4.6: Household average size and headship by division	
Table 5.1: National discharge standards for selected pollutants	
Table 5.2: Regulatory noise limits	
Table 5.3: Uganda's regulatory air quality standards for selected pollutants	
Table 5.4: WBG General EHS Guidelines (April 30, 2007)	
Table 5.5: Treatment and disposal methods for categories of healthcare waste	
Table 5.6: Air emission levels for hospital waste incineration facilities	
Table 5.7: Comparison of Uganda requirements and those of WBG including IFC	
Table 6.1: Expected waste from the laboratory	
Table 8.1: Impact Monitoring & Management Plan.	
List of figures	
Figure 1.1: Location of the proposed project site	
Figure 4.1 Distribution of annual rainfall in Uganda	17
Figure 4.2 Types of soils in Mbale District and Municipality	19
Figure 4.3 Administrative boundaries of Mbale district and the location of the Municipality	20
Figure 4.4 Population pyramid of Mbale Municipal Council	22
Figure 4.5 Population densities by sub-county in Mbale district (persons/km²)	22
Figure 4.6 Access to safe drinking water in Mbale district (%)	26
Figure 4.7 Distribution of drinking water sources in Mbale district	29
Figure 5.1 ESIA process in Uganda	34
Figure 5.2 Recommended stack design for small combustion sources	40
Figure 8.1 Grievance management mechanism	72

# List of photographs

Photo 3.1: Digital CASELLA microdust and 6-gas MX6 iBrid™ meters to be used measure air quality	13
Photo 3.2: Noise measurement meter	13
Photo 3.3: Taking noise and air quality measurement behind T.B ward near the proposed site	13
Photo 4.1: Some of the structures and overcrowding nature near the entrance of Mbale RRH	19
Photo 4.2: Specimen reception of the existing laboratory	24
Photo 4.3: Microbiogical section of laboratory	24
Photo 4.4: Fridge used for storage of blood at the lab	24
Photo 4.5: T.B laboratory at the proposed project site	24
Photo 4.6: Some of the structures and overcrowding nature near the entrance of Mbale RRH	
Photo 4.7: Groundwater supply system for emergency water supply to the ward of expectant mothers	26
Photo 4.8: Incinerator installed at the hospital behind the TB ward	27
Photo 4.9: Solid waste collection area	28
Photo 4.10: Incinerators used for burning waste	28
Photo 4.11: Open dumping and burning of medical waste at Mbale RRH	28
Photo 6.1: Existing microbiology/ T.B laboratory at the proposed project site	55
Photo 6.2: The T.B ward bordering the proposed project site that may be affected by construction activities	55

## **Executive Summary**

The Government of the Republic of Uganda, with funding from the International Development Association (IDA), plans to construct a medical laboratory at Mbale Regional Referral Hospital. The construction shall be undertaken through the East African Public Health Laboratory Networking Project (EAPHLNP) with support from the World Bank. The general objective of the project is to improve access to diagnostic services among vulnerable populations living in the cross-border areas of the Republic of Southern Sudan, Democratic Republic of Congo and Uganda. The laboratory networking project also aims to address the common challenges facing the East African countries, that is, dilapidated infrastructure that was built decades ago; inadequate supply and quality of human resources which are a backbone of quality diagnostics; and manual information systems which are not effective for decision making.

The general objective of the project is to improve access to diagnostic services among vulnerable populations living in the cross-border areas of the Republic of Southern Sudan, Democratic Republic of Congo and Uganda. The laboratory networking project also aims to address the common challenges facing the East African countries, that is, dilapidated infrastructure that was built decades ago; inadequate supply and quality of human resources which are a backbone of quality diagnostics; and manual information systems which are not effective for decision making.

The project site is located within Mbale Regional Referral Hospital (Mbale RRH). Mbale RRH is located in the Mbale Municipality, Mbale District approximately 439 km by road, northwest of Kampala. It is the referral hospital for the districts of Adjumani, Mbale, Koboko, Maracha-Terego, Moyo, Nebbi and Yumbe. The hospital also receives referrals from neighbouring parts of Southern Sudan and the Democratic Republic of the Congo.

Mbale district lies in the north western part of Uganda bordered by Yumbe in the North West, Moyo district in the north east, Maracha district in the North West, Democratic Republic of Congo in the west, Nebbi district in the south, and Amuru district in the east Mbale Municipality, the administrative and commercial headquarters is 520 km away from Kampala, Uganda's capital city.

Mbale is an important and rapidly growing trading area serving Democratic Republic of Congo (DRC) and Southern Sudan. Due to influx of a large number of local and regional traders the District has often had diseases outbreaks and this buttresses the importance of healthcare services in the local government. The proposed laboratory will enable diagnosis of disease to facilitate delivery of improved healthcare services in the region. The proposed laboratory will conform to level 2 safety designs and practices, shall handle clinical specimens mainly from the wards and clinics in the hospital, but also some specimens referred from other health facilities. In addition, a limited number of specimens shall be collected within the laboratories. A broad range of testing including clinical chemistry, haematology, immunology and microbiology shall be offered. The laboratory shall also act as a site for internship for students from various institutions in the country.

Potential impacts of the proposed project are outlined below and discussed in detail in Chapter 6.

#### **CONSTRUCTION-PHASE IMPACTS**

#### **Positive Impacts:**

#### Income to material/ equipment suppliers and contractors

Development of the project will entail civil works requiring materials such as gravel, bricks, lumber, steel reinforcement and cement. This is a **positive** but **short-term** and **reversible** impact. Considering that construction labour would be local or national but medical equipment procured internationally, this impact has local, national and international spatial extent.

#### Employment

Construction will avail skilled and unskilled job opportunities. This would be a **positive** but **short-term** and **reversible** impact, lasting only during the construction period.

#### **Negative Impacts**

#### a) Waste generation (improper construction waste management)

Solid waste will be generated at the site during site preparation and construction phases. The waste may consist of demolition debris including timber or metal cuttings, excavated materials, paper/cement bags, empty paint and solvent containers, broken glass among others. Some of the waste materials such as paints, cement, adhesives and cleaning solvents contain hazardous substances, while some of the waste materials including metal cuttings and plastic containers are not biodegradable and can have long-term and cumulative effects on the environment. It impacts on the environment through blockage of drainage systems and negative impacts on human health. Other wastes which will be generated by non-construction activities because of the presence of the workers at the site include food debris, contaminated water from washing, cleaning equipment, construction tools and vehicles.

Inappropriate disposal of construction waste or spoil and domestic waste could have medium or long-term environmental and public health impact. Extent of this impact will be local to areas where waste is dumped or their immediate neighbourhoods.

#### Mitigation strategies:

- i) The wastes will be properly segregated and separated to encourage recycling of some useful waste materials, that is, some excavated stone materials and demolition debris of the microbiology laboratory can be used as backfills.
- Hazardous waste will not be mixed with other solid waste generated and should be managed by way
  of incineration or land-filling.
- iii) Waste will be picked off the site at least once in 24 hours and when temporarily kept on site it will be covered to minimize nuisance odour and vermin.
- iv) The contractor and hospital administration will work together with the Municipal Council to facilitate proper waste handling and disposal from the site. All wastes must be taken to the approved dumpsites.
- v) Hazardous wastes such as paints, cement, adhesives will be managed through a third party contractor certified by NEMA. The contractor and hospital administration will work together to facilitate sound waste handling and disposal from the site.

#### b) Pressure on existing resources

During the construction stage, demand for basic amenities such as water and electricity may put pressure on the existing infrastructure.

Considering the nature of the project, the impact *intensity* shall be *low* and *short term* limited to the construction phase only. The hospital has power backup and it was reported to be stable. The hospital has a water reservoir although it is not big enough to sustain the hospital demand. However, the *sensitivity* on the receptors will be *high* since it hampers with utility supplies to hospital community, thereby giving a *moderate* impact *significance*.

#### Mitigation strategies:

The contractor should provide separate storage for water to use at the construction. Instead of connecting to the hospital water supply system, the contractor should opt to use water bowsers for supply.

#### c) Generation of noise and vibrations

Noise will be one of the most undesirable consequences of the construction phase. Relatively high noise levels are expected in the area during construction phase. Considerable levels of noise and vibrations will mainly result from demolition activities of the existing laboratory at the proposed site and use of heavy equipment including excavators, graders and dump trucks during site preparation and construction activities. Though the level of discomfort caused by noise is subjective, the most commonly reported impacts of increased noise levels are interference in oral communication and disturbance in sleep or during resting time, disturbance or discomfort resulting from construction noise cannot be ruled out given that the proposed site is located in the vicinity of other hospital units, the psychiatric ward and T.B ward.

#### Mitigation strategies:

- i) Contractor will be careful when selecting equipment to avoid use of old or damaged machinery with high level of noise emissions that would have a negative impact in the environment.
- ii) Contractor will ensure that equipment is properly serviced and efficient.
- iii) Contractors will cordon off construction site with noise absorbing materials, for example, plywood rather than iron sheets.
- iv) Construction workers will be aware of the sensitive nature of workplaces they are operating in and advised to limit verbal noise or other forms of noise. For example, metallic objects or tools can be passed on to a colleague rather than dropping or throwing them with loud bangs.
- v) The contractor shall ensure that noise levels emanating from machinery, vehicles and noisy construction activities are kept at a minimum for the safety, health and protection of people in the nearby buildings.
- vi) Noise and vibration will be minimized at the project site and surrounding areas through sensitization of construction truck drivers to switch off vehicle engines while offloading materials.
- vii) All generators and heavy duty equipment will be insulated or placed in enclosures to minimize disrupting ambient noise levels.

#### d) Disruption of laboratory services

Since laboratory services will continue to be provided, demolition of the microbiology/ T.B laboratory will entail moving equipment from one area or room to another. This may cause temporary disruption in delivery of diagnostic services to patients. Temporary rearrangement of service areas can have the undesirable consequence of slowing down emergency services or cause inability among health workers to efficiently offer necessary services adequately. Some equipment might also get damaged during movement.

#### Mitigation strategies:

- Plan pre-construction activities early to identify suitable rooms or adjoining buildings into which
  patients or service areas can be relocated with minimal inconvenience, especially to patients in the
  cancer ward below the laboratory to be re-modified.
- ii) The microbiology laboratory will be relocated to an area or room that is less congested to minimise spread of T.B to other patients
- iii) Contractors should work closely and harmoniously with the hospital administration to find practical ways to minimize social cost of temporary disruption of services.

#### e) Indoor air quality deterioration

Traffic-borne emissions include dust and exhaust fumes. Demolition of the microbiology laboratory will lead to considerable levels of indoor cement dust which can affect workers and patients in the neighbouring

wards. Deteriorated indoor air quality would be of critical effect to especially asthmatic construction workers, T.B patients and health workers with either minor or severe health impact depending on level and duration of exposure. The trucks used to transport various building materials from their sources to the project site generate emissions of SO<sub>2</sub>, CO<sub>2</sub>, CO, NOx and particulates.

#### Mitigation strategies:

- i) Contractors should use dust screens or nets in windows, doorways and ventilators of rooms where demolition or other dusty construction activities are occurring.
- ii) Ensure good housekeeping and clean construction operations where, among other necessary actions, dust should be quickly swept off cement floors and collected in covered containers.
- iii) A senior healthcare administrator or superintendent at the hospital should have authority to inspect and restrain contractors from generating excessive dust within hospital environment.
- iv) To minimize indoor dust, portable extraction systems are recommended but they might not be available among local contractors, or lack of electricity on site might limit their use. Water sprays are not practical and could lead to indoor flooding of surrounding rooms or service areas occupied by patients.
- v) Trucks shall be covered during haulage of construction materials and should be diverted away from sensitive areas of the hospital;
- vi) Construction work should be undertaken by an experienced and duly registered contractor with a verifiable sense of environmental awareness and responsibility.

#### f) Temporary scenic blight

Construction activities will require material, equipment and cordons at the hospital. Since the hospital will remain open for access by public, presence of these activities and materials thereof will cause temporary visual blight at the construction site. Presence of construction activities will alter visual impressions accustomed to.

Mitigation strategy: The contractor shall ensure minimal footprint of construction activities.

#### g) Occupational health safety (OHS) Risks for Contractors

Construction activities have potential to pose occupational risks some of which could be life-threatening, for example, fatal falls if workers do not use safety latches when working at heights. Working with high voltage and hot works (welding) pose a risk of electrocution. In addition, falling debris could injure workers if personal protective equipment (PPE) are not provided or properly used. Back injury could occur if workers lift heavy objects using inappropriate body posture.

Uganda and WBG Guidelines require that workers exposed to a noise level greater than 85 dB(A) for a duration of more than 8 hours per day wear hearing protection. Related OHS safeguards are comprised in (Uganda's) Occupational Safety & Health Act (2006) and Employment Act, 2006.

Mitigation strategies that will be undertaken are:

- Training will be conducted on how to prevent and manage incidences. This will involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences. All workers will fully be aware and mentally prepared for potential emergency.
- Strict instructions shall be given for drivers of heavy equipment.

- Supervision of works shall be done regularly to ensure that safety conditions are met while any deviation from safety regulations is immediately reclaimed following the best practices regarding safety at work equipment.
- Provide adequate OHS protective gear to construction workers. The guide below shall be useful:

#### h) Accidents

The hospital is located in the business district of the municipality with a lot of human activity on the adjoining road at the access gate to the hospital. With an increase in number of heavy vehicles during transportation of construction materials and equipment, there will be an increase of community risk of traffic-related accidents or injuries. Traffic accidents would be a significant social impact and especially likely to involve children, women (who commonly cross roads slower than men), disabled and elderly people, notwithstanding the safety risks created by the falling debris from construction activities.

#### Mitigation strategies:

- Contractors will adopt best transport safety practices with the goal of preventing traffic accidents and minimizing injuries suffered by project personnel and the public.
- i) Project will require contractors to regularly maintain vehicles to minimize potentially serious accidents such as those caused by brake failure commonly associated with loaded construction trucks.
- iii) The site shall be fenced and signs put in place with security personnel to stop unauthorised people from accessing the site.
- iv) For falling debris, and hoarding/scaffoldings; clear warning signs will be placed around the construction premise, install interceptors and net traps to divert falling debris, and emphasize (provide) person protective gears to persons in the area.
- v) Warning signs will be provided to warn of falling debris.
- vi) Protective gear shall be provided to workers on site..

#### **OPERATION PHASE IMPACTS**

#### **Positive Impacts**

#### a) Improved medical surveillance services

The project will positively impact health of Ugandans and the East African region through easing access to diagnostic services for TB and other communicable diseases. It will help to enhance access to diagnostic services for vulnerable groups; improve capacity to provide specialized diagnostic services and conduct drug resistance monitoring; and strengthen laboratory based disease surveillance to provide early warning of public health events.

Enhancement measures: Appropriate staffing with technical/ medical personnel adequately trained in use of newly installed equipment.

#### b) Employment opportunities

Operation of the laboratory will create additional long-term technical and non-technical job opportunities for medical professionals, janitors, etc.

#### **Negative Impacts**

Negative impacts during operation of the laboratory may arise from:

i) Improper waste management (including laboratory/medical waste and wastewater discharges);

- ii) Misuse or inability to use installed equipment for improved service delivery;
- iii) Lack of maintenance, hence laboratory facilities degenerating to decay again;
- iv) Safety and occupational risk to health workers; and
- v) Risk of fire outbreak
- vi) Emissions from the incinerator.
- vii) Theft of laboratory equipment
- viii) Theft and misuse of laboratory reagents, especially highly concentrated acids known to be used in vengeful attacks on people in Uganda

These are discussed in sections below.

#### a) Improper management of waste

As a result of the operation of this laboratory it is expected that some waste is generated. Mainly there will be *domestic waste and hazardous waste*. Since laboratory activities involve certain medical examinations and also there will be a need for usage of different sorts of chemicals or reagents, it can be concluded that different types of hazardous wastes shall be generated. Therefore, improper waste decontamination and disposal can cause public health risks due to environmental pollution: impaired air quality, stormwater contamination of water courses and infections when people or children rummage through improperly dumped infectious waste or raw waste stockpiles can be life-threatening.

#### Mitigation strategies:

- i) Wastewater discharged from laboratory shall be aggregated and eventually pre-treated prior being discharged into the sewerage system.
- ii) Appropriate waste bins will be provided for the different types of waste generated in the laboratory to allow segregation and collection at the point of generation.
- iii) Waste shall be collected from site at least once in 24 hours, and it shall be done in such a way to minimize nuisance odours, vermin and dust
- iv) Hospital/ Laboratory staff shall be trained or educated on the importance and means of waste management and handling during operation.
- v) The hospital administration shall work together with a private refuse handlers and the Municipal Council to facilitate sound waste handling and disposal from the site noting that hazardous waste must not be mixed with municipal waste..

#### b) Air pollution

On occasions when the incinerator installed is inadequate, open burning of waste may be carried out. This will result in emissions to the air including odour, particulate matter, hydrogen chloride, nitrogen oxides, sulphur dioxide, carbon monoxide, and volatile organic compounds (from methane to polycyclic aromatic hydrocarbons (PAH), dioxins and furans (PCDD/F) Dioxins are known to promote cancers in humans. In addition, downwash of incinerator emissions has potential to degrade indoor air quality for buildings.

#### Mitigation strategies:

- i) The laboratory will ensure that operator of incineration unit is properly trained;
- ii) The incinerator shall be operated at its design temperatures and combustion air supply;
- iii) The laboratory will be equipped with bio-safety areas and have a ventilation system that fulfils standards of biosafety;
- iv) Adequate fuel should be provided so that waste is incinerated immediately upon generation to avoid unnecessary accumulation to render the unit inadequate;

v) All exhaust air from the laboratory shall pass through high efficiency particulate air filters.

#### C Occupational health and safety risks

Inadequate treatment or handling of contaminated samples or waste can have potential to expose laboratory staff to risk of transmission of life threatening infections at work. This transmission can take place through equipment, clothing and vehicles transporting samples. The infectious waste could be in gaseous, liquid or solid forms. A list of OHS risk sources for staff is presented below:

#### Mitigation strategies:

- i) Orient all staff on safe work practices and guidelines and ensure that they adhere to them.
- ii) Training staff on how to prevent and manage incidences. This should involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences.
- iii) Regular safety drills to constantly follow on various possible incidences.
- iv) Use signage to warn staff and/ or visitors that are not involved in laboratory work of dangerous places.
- v) Develop evacuation procedures to handle emergency situations.
- vi) Provide adequate OHS protective gear for all laboratory staff.

#### d) Risk of fire outbreak

Without provisions for fire safety, there is a risk of fire outbreak in the laboratory with disastrous life and financial impact. Fires can start from ignitable materials in laboratories, cigarette smoking in non-designated places or old electrical connections.

#### Mitigation strategies:

- Fire extinguishers to be provided at strategic locations within the laboratory and ensure that all firefighting equipment are regularly maintained and serviced.
- ii) Key healthcare staff shall have training in fire control through regular firefighting drills.
- iii) Fire emergency telephone numbers shall be displayed in communal areas.
- iv) Automatic fire alarm system for the entire laboratory will be installed and water hose reels installed in the laboratory.
- v) Fire hazard signs such as 'No Smoking' signs will be provided. Directions to exit in case of any fire incidence and emergency contact numbers shall be provided. The contact/emergency numbers shall be displayed within the laboratory.

An EMP has been proposed in Chapter 8 for construction works and operation of laboratory facility. The EMP identifies potential environmental and social aspects that should be monitored, parties responsible for monitoring actions, associated costs, indicators and training or capacity building needs and reporting.

The proposed project has potential to significantly improve quality of laboratory services and efficiency of service provision in the Mbale region with socio-environmental benefits such as reduced morbidity and increased productivity of labour hence higher household incomes; opportunity to have access to laboratory services hitherto unavailable at Mbale Regional Referral Hospital due to lack of equipment or facilities. Possible socio-environmental impacts can be adequately controlled with mitigation measures presented dint his report.

Table ES1: Impact monitoring & management plan

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
6.2	CONSTRUCTION PHASE			-	-	-	-
6.2.1	Positive impact						
6.2.1.1	Income to equipment ad ma	terial suppliers					
	Project will promote local procurement where technically or commercially reasonable and feasible.	Ensure that local communities and businesses benefit from procurement process	Number of local businesses benefiting from construction related procurement	Before and during commencement of construction	MOH; Contractor	Negligible	None
	For earth materials, procure from legitimate sources to avoid encouraging environmental degradation	Project's material demand does not encourage environmental degradation	All quarries from which materials (sand, stone) are obtained are licensed by the local authorities.	Before and during construction	MOH; Contractor	Negligible	None
6.2.1.2	Employment  Contractor will avail local communities with information leaflets in their local languages to create awareness about the proposed project activities	The participation of local community members in all project activities possible.	Local community awareness of project progress status	Before and during construction	MOH; Contractor	Negligible	None
	Unskilled labour will be recruited exclusively from local community, and semiskilled labour will be recruited preferentially from such communities, provided that they have the requisite qualification, competence and desired experience.	The participation of local community members will be maximised during site preparation and construction activities.	Number of local people (unskilled and semi-skilled) employed during construction phase	Before and during construction	MOH; Contractor	Negligible	None
	Contractors will be encouraged to pay a "living wage" to all workers.	Improve livelihood of the local community	No complaints of poor remuneration	Before and during construction	MOH; Contractor	Negligible	None
6.2.2	Negative impacts			•	•	•	•
6.2.2.1	Improper construction Wast						
	The wastes will be properly	Contractor has records of	No report of illegal waste dumping	Throughout	MOH;	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	segregated and separated to encourage recycling of some useful waste materials, that is, some excavated stone materials and demolition	proper waste disposal indicating quantities dumped and location of dumping site	in non-designated areas	construction	Contractor; Local Environmental Officer.		
	debris of the microbiology laboratory can be used as backfills.	Amount of waste disposed minimized by reuse, wherever feasible	Record of material types and estimated quantity diverted for reuse				
	The contractor and hospital administration will work together with the Municipal Council to facilitate proper waste handling and disposal from the site. All wastes must be taken to the approved dumpsites.						
	Hazardous waste will not be mixed with other solid waste generated and should be managed by way of incineration or land-filling. Waste will be picked off the site at least once in 24 hours and when temporarily kept on site it will be covered to minimize nuisance odour and vermin.	Hazardous waste separated from non- hazardous waste on site and each waste stream disposed of according to NEMA requirements in designated sites.	Separate containers for hazardous waste and non-hazardous waste on site	Throughout construction	MOH ; Contractor; Local Environmental Officer.	Negligible	Likely hazardous and non-hazardous construction waste
	Hazardous wastes such as paints, cement, adhesives will be managed through a third party contractor certified by NEMA. The contractor and hospital administration will work together to facilitate sound	Hazardous waste separated from non- hazardous waste on site and each waste stream disposed of according to NEMA requirements in designated sites.	Separate containers for hazardous waste and non-hazardous waste on site	Throughout construction	MOH; Contractor; Local Environmental Officer.	Negligible	Likely hazardous and non-hazardous construction waste

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	waste handling and disposal from the site.						
6.2.2.2	Pressure on infrastructure						
	The contractor should provide separate storage for water to use at the construction. Instead of connecting to the hospital water supply system, the contractor should opt to use water bowsers for supply.	Uninterrupted water supplies to hospital community	No complaint of irregularities in water supply related to construction activities	Throughout construction	MOH; Contractor	Negligible	None
6.2.2.3	Generation of noise and vib	orations	-	I	1	•	<b>'</b>
	Construction workers will be aware of the sensitive nature of workplaces they are operating in and advised to limit verbal noise or other forms of noise. For example, metallic objects or tools can be passed on to a colleague rather than dropping or throwing them with loud bangs.	No excessive noise from workers	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	Contractor will be careful when selecting equipment to avoid use of old or damaged machinery with high level of noise emissions that would have a negative impact in the environment.	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	All generators and heavy duty equipment will be insulated or placed in enclosures to minimize disrupting ambient noise	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	levels.						
	Contractor will ensure that equipment is properly maintained and fully functional.	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	Contractors should cordon off areas under construction with noise absorbing materials, for example, plywood rather than iron sheets;	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Comprised in cost for control of flying debris	None
	The contractor should ensure that noise levels emanating from machinery, vehicles and noisy construction activities are kept at a minimum for the safety, health and protection of people in the nearby buildings.	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	Construction workers and drivers should be sensitised to switch off Equipment, machinery and vehicle engines when not in use and/or offloading materials.	Minimized noise and vibration at the project site.	Patients and health workers do not complain about noise and vibration during construction	•	MOH; Contractor	Negligible	None
	Construction activities should be carried out during the day	Afford hospital community noise-free night time to rest	No complaints of restless nights due to noise and vibration from project activities.	During construction	MOH; Contractor	Negligible	None
6.2.2.4	Disruption of laboratory ser	vices		•	•	•	•
	Plan pre-construction activities early to identify suitable rooms or adjoining buildings into which the microbiology laboratory can	Microbiology laboratory relocated to a conducive room(s) with minimal interference of diagnostic services.	No complaints about service delivery	Before construction activities	МОН	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	be relocated with minimal inconvenience						
6.2.2.5	Indoor air quality deteriorat		No considerate of consideration dent	I Donain a	IMOLI.	10	I Niana
	Contractors should use dust screens or nets in windows, doorways and ventilators of rooms where demolition or other dusty construction activities are occurring.	No excessive dust emissions noted outside construction areas	No complaints of excessive dust from construction areas	During construction	MOH; Contractor	Comprised in cost for control of flying debris	None
	Ensure good housekeeping and clean construction operations where, among other necessary actions, dust should be quickly swept off cement floors and collected in covered containers.	Minimise dust and exhaust emissions	No complaints of trucks ruthless driving from communities along roads used by project vehicles	During construction	MOH; Contractor	Negligible	None
	A senior healthcare administrator or superintendent at the hospital should have authority to inspect and restrain contractors from generating excessive dust within hospital environment.	No material spills on roads during haulage to sites	No accidents caused by construction material split on road	Throughout construction	MOH ; Contractor; Police	Negligible (this should be part of contractor's bid)	None
	To minimize indoor dust, portable extraction systems are recommended but they might not be available among local contractors, or lack of electricity on site might limit their use. Water sprays are not practical and could lead to indoor flooding of surrounding rooms or	Minimise dust levels	Recognition of locales of contractor's efforts to minimise dust nuisance.	During construction	MOH; Contractor	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements		
	service areas occupied by patients.								
	Trucks shall be covered during haulage of construction materials and should be diverted away from sensitive areas of the hospital	No material spills on roads during haulage to sites	No accidents caused by construction material split on road	Throughout construction	MOH ; Contractor; Police	Negligible (this should be part of contractor's bid)	None		
	Construction work should be undertaken by an experienced and duly registered contractor with a verifiable sense of environmental awareness and responsibility	Reduce dust levels in off- site locations	No complaints of dust from neighbouring wards and offices	Throughout construction	MOH; Contractor	Negligible	None		
6.2.2.5	Temporary scenic blight								
	Contractor should ensure minimal footprint of construction activities.	Project workers and activities restricted to construction site	Workers and materials not found at locations away from construction site	Throughout construction	MOH; Contractor	Negligible	None		
6.2.2.6	Occupational health safety	(OHS) for contractors			-	1			
	Orient all construction workers on safe work practices and guidelines and ensure that they adhere to them.	Reduce OHS on construction workers	Records of workers' orientation	Throughout construction	MOH; Contractor	Negligible	None		
	Training should be conducted on how to prevent and manage incidences. This should involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences. All must fully be aware and	Reduce OHS on construction workers	Records of training and Impromptu interviews with workers on OHS emergency response	Throughout construction	MOH; Contractor	Negligible	None		

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	mentally prepared for potential emergency.						
	Regular drills should constantly follow on various possible incidences. This will test the response of the involved stakeholders. Such drills will keep them alert and they will become more responsive to in the case of incidences.	Reduce OHS on construction workers	Records of drills on OHS emergency response	Throughout construction	MOH; Contractor	Negligible	None
	Use signage to warn staff and/ or visitors that are not involved in construction activities of dangerous places.	Reduce OHS on construction workers and the public	Presence of appropriate signage on-site	Throughout construction	MOH; Contractor	Negligible	None
	Supervision of works should be done regularly to ensure that safety conditions are met while any deviation from safety regulations is immediately reclaimed following the best practices regarding safety at work equipment.	Reduce OHS on construction workers	Presence of supervisor on-site	Throughout construction	MOH; Contractor	Negligible	None
	Develop evacuation procedures to handle emergency situations.	Reduce OHS on construction workers	Documented Emergency Response Preparedness Plan (ERPP)	Throughout construction	MOH; Contractor	Negligible	None
	Provide appropriate PPE to all workers not limited to;  Ear Muffs: One size fits all, comfortable, less ear infection risk  Ear Plugs: Small, lightweight, can get dirty	Reduce health and safety risks to construction workers	Zero injuries in any month of construction phase	Before construction commences	MOH; Contractor	USD 5,000.	Application of various types of PPE and their proper use.

Text Reference	Impact and	Desired Outcomes	Monitoring: Performance	Timing	Responsibility	Incremental	Capacity Building
	Mitigation/Enhancement		Indicators/Targets or			Costs (USD)	and Training
	commitments		Acceptance Criteria			, ,	Requirements
	and cause infection						
	<ul> <li>Face/Eye (Working with</li> </ul>						
	any chemical or using						
	any mechanical						
	equipment)						
	Face Shield: Protect						
	face from splashing and						
	particles						
	<ul> <li>Safety Glasses:</li> </ul>						
	Protection from solids						
	(cutting, sanding,						
	grinding)						
	Safety Goggles: Protects						
	eyes from splashing						
	<ul> <li>Hand (Use correct</li> </ul>						
	gloves for the job)						
	<ul> <li>Chemical Gloves:</li> </ul>						
	(Nitrile, Latex, PVC)						
	<ul> <li>Gloves for other use:</li> </ul>						
	special gloves for						
	cutting, burning,						
	abrasions/ blisters						
	Body						
	Overalls: Can protect						
	against dust, vapours,						
	splashes						
	Foot Protection						
	If electrical hazard						
	present ensure boots						
	offer protection						
	Safety Toe/Steel Toe     Destay Always warm						
	Boots: Always worn						
	when potential for falling						
	hazards exists						
	Water/Chemical						

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	Resistant Boots: Use in a spill situation  Non-slip boots for working on wet/slippery floors.						
6.2.2.7	Accidents  Adopt best transport safety practices with the goal of preventing traffic accidents and minimizing injuries suffered by project personnel and the public	No road accident by project traffic	No accident occurs in each month of construction duration	During construction	MOH; Contractor	Negligible	Contractor needs road safety awareness to project personnel and the public
	Ensure drivers respect speed limits through built areas and urban centres.	No road accident by project traffic	No accident occurs in each month of construction duration	During construction	MOH; Contractor	Negligible	Contractor needs speed awareness through built areas and urban areas
	Ensure that vehicles are regularly maintained to minimize potentially serious accidents such as those caused by brake failure commonly associated with loaded construction trucks	No road accident due to poor mechanical conditions of project vehicles.	No accident occurs in each month of construction duration	During construction	MOH; Contractor	Negligible	None
	Employ safe traffic control measures, including temporary road signs and flag persons to warn of dangerous conditions and children crossings	No road accident by project traffic	No accident occurs in each month of construction duration	During construction	MOH; Contractor	USD 500	None
	Contractors should cordon off areas under construction and provide signage to warn of on-going construction works.	cause injury to patients and health workers	Zero injuries in any month of construction phase	During construction	MOH; Contractor	Negligible	None
	Contractors should use	No debris noted outside	No complaints about flying debris	During	MOH;	USD 2,500	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements				
	screens or nets to avoid flying debris and dust	construction areas	from construction areas (this should be verified by perusal of records in complaints log)	construction	Contractor						
6.2 (all subsections)	Impact of construction activities	Construction activities do not cause adverse socio- environmental impacts	Annual construction audits do not indicate adverse impacts not mitigated	1 time per year (NB. Estimated construction duration = 1 year per lot, see Table.20)	MOH (construction audit may be undertaken by MOH or consultant it hires)	USD 4,000	Environmental auditing of construction projects				
6.3	OPERATION PHASE			I	I.						
6.3.1	Positive										
6.3.1.1	Improved medical surveillance services										
	Construction of laboratory facilities should be matched with commensurate staffing with laboratory personnel adequately trained in use of newly installed equipment	Installed laboratory equipment fully utilised to enhance laboratory services at the hospital.	laboratory has trained staff to properly and safely operated provided laboratory equipment	1 month after equipment installation	MOH and supplier	None (procurement cost assumed to include training)	Staff training in operation of newly installed laboratory equipment				
	Reduced public risks due to improvement in laboratory waste management	Environmental audits show that medical waste and incinerator emissions do not cause onsite/ offsite public health risk	Annual environmental audits find no plume downwash from incinerators.  Incinerators stacks designed based on GIIP / WBG EHS guidelines  No un-incinerated medical solid waste on premises or waste dumps	Undertake full environmental audit once per year	МОН	Environmental audit cost: USD 15,000.	Operation of incineration units;  Decontamination procedure in the laboratory				
6.3.1.2	Employment opportunities	ı		1	ı	I .	1				
	Operation of the laboratory will create additional long-	Improve laboratory services	Laboratory has adequate trained staff.	Daily	МОН	Negligible	None				

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	term technical and non- technical job opportunities for laboratory professionals, janitors, etc.						
6.3.2	Negative					•	
6.3.2.1	Improper waste managemen				T.	1	
	Ensure proper waste management practices as recommended in the study on improvement of laboratory waste management.	No community health risk due to improper waste management	No raw medical waste is dumped at public dumps	Daily	Healthcare facility administrator/ Superintend	Negligible	None
	The collection of waste should be made at least once in 24 hours, and it should be done in such a way to minimize nuisance of smell and dust during collection and all the waste collected must be carried away from the storage site to an approved disposal point.		No smell or accumulated waste in and around the laboratory	Daily	Hospital administrator/ Superintend	Negligible	None
	Provide appropriate waste bins for the different types of waste generated in the laboratory to allow segregation and collection at the point of generation.	litter.	Presence of adequate waste bins in and around the laboratory facility	Daily	Hospital administrator/ Superintend	Negligible	None
	Hospital/ Laboratory staff should be trained or educated on the importance and means of waste management and handling during operation.	Proper waste handling and management	Presence of labelled waste bins on-site	Daily	Hospital administrator/ Superintend	Negligible	None
	The hospital administration	Proper waste disposal	Documentation of formal	Monthly	Hospital	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements		
	should work together with a private refuse handlers and the Municipal Council to facilitate sound waste handling and disposal from the site noting that hazardous waste must not be mixed with municipal waste.		engagement of refuse handlers		administrator/ Superintend				
	Laboratory should have standard operation and decontamination procedure manuals and clearly displayed at appropriate point(s) with the laboratory	Efficient containment of pathogens	Display at appropriate point(s)	Daily	Hospital administrator/ Superintend	Negligible	None		
6.3.2.2	Air pollution								
	The laboratory will ensure that operator of incineration unit is properly trained and the incinerator shall be operated at its design temperatures and combustion air supply;	No offsite air pollution from incineration (such as due to plume downwash).	Visual observation reveal no plume downwash of stack emissions	From start of use of new incinerators	MOH; Hospital administrator	Negligible	None		
	Ensure Training of Incinerator operators for efficient and proper incineration units operations.	Incineration does not generate dioxins	Incinerator operator complete training course	1 month before commissioning incinerator	МОН	USD 1,000	Operation of incineration unit/ facility		
	The laboratory will be equipped with bio-safety areas and have a ventilation system that fulfils standards of biosafety;	Pathogen containment	Presence of bio-safety areas	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None		
	Adequate fuel should be provided so that waste is incinerated immediately								

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	upon generation to avoid unnecessary accumulation to render the unit inadequate						
	All exhaust air from the laboratory shall pass through high efficiency particulate air filters	Pathogen containment	Presence of air filters	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None
6.3.2.3	Occupational health and sa	fety risks		•		•	•
	All workers to be Provided with appropriate PPE against exposure to infectious pathogens, hazardous chemicals and ionizing radiation in accordance with recognized international safety standards and guidelines.		PPE.	,	Healthcare facility administrator/ Superintend	Negligible since all requisite PPE to be provided as part of by equipment supplier bid.	None
	Orient all staff on safe work practices and guidelines and ensure that they adhere to them.	Reduce staff OHS	Records of staff orientation on safety practices and guidelines	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	Safety practices and guidelines
	Training should be conducted on how to prevent and manage incidences. This should involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences	around laboratory facility prevention of incidences laboratory admit	Hospital administrator/ Superintend	Negligible	Prevention and manage incidences.		
	Regular drills should constantly follow on various possible incidences. This will test the response of the involved stakeholders. Such	Staff preparedness to combat possible incidences	Records of incidence prevention drills	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	drills will keep them alert and they will become more responsive to in the case of incidences.						
	Use signage to warn staff and/ or visitors that are not involved in laboratory work of dangerous places	Public and other staff safety	Presence of appropriate and clear signage in and around laboratory facility	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None
	Develop evacuation procedures to handle emergency situations.	Public and other staff safety	Evacuation procedure document	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None
6.3.2.4	Risk of fire outbreak						1
	Fire extinguishers to be provided at strategic locations within the laboratory and ensure that all fire-fighting equipment are regularly maintained and serviced	Laboratory has basic capacity to fend off a small or average fire outbreak	Laboratory has a minimum of 2 medium-size fire extinguishers (one of which should be for electrical fires)	During equipment installation upon completion of construction/ renovation works	МОН	USD 1,500 (100 per extinguisher)	Basic firefighting skills
	Laboratory facility will have a fire emergency management plan and key healthcare staff shall have training in fire control through regular firefighting drills	Laboratory has basic capacity to fend off a small or average fire outbreak	At least 2 medical staff have certificate of basic firefighting.	During equipment installation upon completion of construction/ renovation works	MOH	To be provided as part of by equipment supplier bid.	Fire drills
	Fire emergency telephone numbers should be displayed in communal areas.	Laboratory has capacity to contact fire department in case of major fire outbreak	Fire emergency telephone numbers displaced in at least 2 communal areas	Throughout operation life of laboratory	МОН	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	Automatic fire alarm system for the entire laboratory will be installed and water hose reels installed in the laboratory.	Laboratory has basic capacity to fend off a small or average fire outbreak	Presence of automatic fire alarm system, adequate water hose reel and reverse water tank equipped with automatic booster pump	Throughout operation life of laboratory	МОН	Negligible	None
	Fire hazard signs such as 'No Smoking' signs will be provided. Directions to exit in case of any fire incidence and emergency contact numbers shall be provided. The contact/emergency numbers shall be displayed within the laboratory	Laboratory has basic capacity to fend off a small or average fire outbreak	Presence of fire hazard signs and exit in appropriate points	Throughout operation life of laboratory	MOH	Negligible	None
TOTAL COST						USD 29,500	

#### 1 INTRODUCTION

#### 1.1 PROJECT BACKGROUND

The Government of the Republic of Uganda, with funding from the International Development Association (IDA), plans to construct a medical laboratory at Mbale Regional Referral Hospital. The construction shall be undertaken through the East African Public Health Laboratory Networking Project (EAPHLNP) with support from the World Bank. The general objective of the project is to improve access to diagnostic services among vulnerable populations living in the cross-border areas of Kenya and Uganda. The laboratory networking project also aims to address the common challenges facing the East African countries, that is, dilapidated infrastructure that was built decades ago; inadequate supply and quality of human resources which are a backbone of quality diagnostics; and manual information systems which are not effective for decision making.

#### 1.2 OVERVIEW OF UGANDA'S HEALTH SECTOR

The health services provision in the country has always been guided by a clear strategic framework to ensure all actions are aimed at improving the health of the people, in a manner that is responsive to their legitimate health needs, and ensure fairness in financing of services being accessed. This HSSIP provides the medium-term strategic framework and focus that the Government intends to pursue in regard to attaining the health goals for the country and it is developed with the prevailing socioeconomic and development context in mind. It is anchored on the NHP II and the National Development Plan ensuring its goals and deliverables are aimed at achieving the overall goals and deliverables of the country.

The National Health System (NHS) is made up of the public and the private sectors. The public sector includes all Government of Uganda (GOU) health facilities under the Ministry of Health (MOH), health services of the Ministries of Defence (Army), Education, Internal Affairs (Police and Prisons) and Ministry of Local Government (MOLG). The private health delivery system consists of Private Not-for-Profit (PNFPs) providers, Private Health Practitioners (PHPs) and the Traditional and Complementary Medicine Practitioners (TCMPs).

The provision of health services in Uganda is decentralised with districts and health sub-districts (HSDs) playing a key role in the delivery and management of health services at those levels. The health services are structured into National Referral Hospitals (NRHs), Regional Referral Hospitals (RRHs), General Hospitals, Health Centre (HC) IVs, HC IIIs, HC IIs and Village Health Teams (HC Is).

The National Hospital Policy (2005), operationalized during HSSP II, spells out the role and functions of hospitals at different levels in the NHS. Hospitals provide technical back up for referral and support functions to district health services. Hospital services are provided by the public, private health providers (PHPs) and private not for profit (PNFPs). The public hospitals are divided into three groups:

i) General Hospitals provide preventive, promotive, curative, maternity, in-patient health services, surgery, blood transfusion, laboratory and medical imaging services. They also provide in-service training, consultation and operational research in support of the community-based health care programmes.

- ii) **Regional Referral Hospitals (RRHs)** offer specialist clinical services such as psychiatry, Ear, Nose and Throat (ENT), ophthalmology, higher level surgical and medical services, and clinical support services (laboratory, medical imaging and pathology). They are also involved in teaching and research. This is in addition to services provided by general hospitals.
- iii) **National Referral Hospitals (NRHs)** provide comprehensive specialist services and are involved in health research and teaching in addition to providing services offered by general hospitals and RRHs.

All hospitals are supposed to provide support supervision to lower levels and to maintain linkages with communities through Community Health Departments (CHDs). Currently, there are 65 public hospitals: 2NRHs, 11 RRHs and 52 general hospitals. There are 56 PNFP and 9 PHP hospitals. With decentralisation, the public general hospitals are managed by the local governments. The RRHs have been granted self-accounting status and remain under MOH oversight. The NRHs, namely Mulago and Butabika, are semi-autonomous. All PNFP hospitals are autonomous as granted by their respective legal proprietors.

#### a) District health systems

The Constitution (1995) and the Local Government Act (1997) mandate the Local Governments (LGs) to plan, budget and implement health policies and health sector plans. The LGs have the responsibility recruitment, deployment, development and management of human resource (HR) for district health services, development and passing of health related by-laws and monitoring of overall health sector performance. LGs manage public general hospitals and HCs and also supervise and monitor all health activities (including those in the private sector) in their respective areas of responsibility. The public private partnership at district level is however still weak.

#### b) Health Sub-District (HSD) system

The HSDs are mandated with planning, organization, budgeting and management of the health services at this and lower health centre levels. HSDs carries an oversight function of overseeing all curative, preventive, promotive and rehabilitative health activities including those carried out by the PNFPs and PFP service providers in the health sub district. The headquarters of an HSD will remain a HC IV or a selected general hospital.

Health Centres III, II and Village Health Teams (HC I)

HC IIIs provide basic preventive, promotive and curative care. They also provide support supervision of the community and HC IIs under their jurisdiction. There are provisions for laboratory services for diagnosis, maternity care and first referral cover for the sub-county. The HC IIs provide the first level of interaction between the formal health sector and the communities. HC IIs only provide out patient care, community outreach services and linkages with the Village Health Teams (VHTs). A network of VHTs has been established in Uganda which is facilitating health promotion, service delivery, community participation and empowerment in access to and utilization of health services. The VHTs are responsible for:

- Identifying the community's health needs and taking appropriate measures;
- Mobilizing community resources and monitoring utilization of all resources for their health;
- Mobilizing communities for health interventions such as immunization, malaria control, sanitation
- and promoting health seeking behaviour;
- Maintaining a register of members of households and their health status;
- Maintaining birth and death registration; and
- Serving as the first link between the community and formal health providers.
- Community based management of common childhood illnesses including malaria, diarrhoea and pneumonia; and management and distribution of any health commodities availed from time to time.

## c) Laboratory services provision

With regard to laboratory services, the Central Public Health Laboratories has the responsibility of coordinating health laboratory services in Uganda, developing policies and guidelines and training and implementing quality assurance schemes for laboratories. A comprehensive national health laboratory services policy was developed and this provides a framework for the future development of laboratory services in the country. The provision of good laboratory services laboratory support for disease surveillance is affected by low levels of funding for laboratory services, a weak regulatory framework and the limited number of laboratory professionals in the country.

## 2 PROJECT DESCRIPTION

### 2.1 PROPONENT CONTACT

Name and address: MINISTRY OF HEALTH

Ministry of Health Headquarters

Plot 6/7 Lourdel Road.

P.O. Box 7272, Kampala, Uganda

T: +256-414-340872, Fax: 256-41-4231584.

### 2.2 LOCATION OF PROJECT SITE

The project site is located within Mbale Regional Referral Hospital. The hospital is located on Pallisa Road, in Mbale Municipality, Mbale District, approximately 245 km by road, northeast of Kampala. It is the referral hospital for the districts of Busia, Budaka, Bukwa, Butaleja, Manafwa, Mbale, Pallisa, Sironko and Tororo. It is also designated as one of the three public clinical paramedical teaching hospitals and as one of the fifteen (15) Internship Hospitals in Uganda, where graduates of Ugandan medical schools can serve a one year of internship under the supervision of qualified specialists and consultants.

**Box 2.1:** Site location according to administrative jurisdiction

Coordinates: 01 04 37N, 34 10.34E (Latitude: 1.0770; Longitude: 34.1760)

Location according to areas of administrative jurisdiction:

- North Central Ward,
- Northern Division,
- Mbale Municipality
- Mbale District

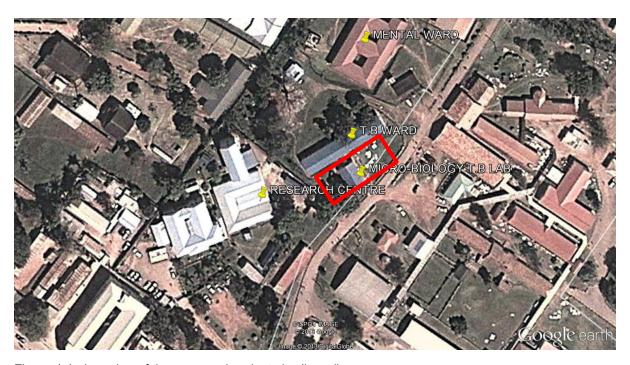


Figure 1.1: Location of the proposed project site (in red)

#### 2.3 PROJECT OBJECTIVES

The general objective of the project is to improve access to diagnostic services among vulnerable populations living in the cross-border areas of Kenya and Uganda. The laboratory networking project also aims to address the common challenges facing the East African countries, that is, dilapidated infrastructure that was built decades ago; inadequate supply and quality of human resources which are a backbone of quality diagnostics; and manual information systems which are not effective for decision making.

## 2.4 PROJECT COMPONENTS

The laboratory which shall conform to level 2 safety designs and practices, shall handle clinical specimens mainly from the wards and clinics in the hospital, but also some specimens referred from other health facilities. In addition, a limited number of specimens shall be collected within the laboratories. A broad range of testing including clinical chemistry, haematology, immunology and microbiology shall be offered. The laboratory shall also act as a site for internship for students from various institutions in the country. The requirements and specifications for space and safety for the laboratories are outlined in Table 2.1 while the general considerations or standards for the proposed laboratory are presented in Table 2.2.

**Table 2.1:** Requirements and specifications for space and safety for the proposed laboratory

Room	Description	Space (m <sup>2</sup> )
Haematology/ Chemistry	Laboratory space for blood analysis: Automated blood counts, coagulation, automated chemistry as well as staining and microscopy. Allows about 6 people working at a time	50
Blood bank	Laboratory space for processing and storage of blood for transfusion. Requires a bench to allow work for 1 personnel at a time and should hold 2 blood bank refrigerators and a water bath	12
Microbiology/Parasitological	Laboratory space for managing a broad range of specimens.  Procedures include microscopy, serology and isolation of pathogens from the specimens. Key equipment in the laboratory shall include a biosafety cabinet, bench top centrifuge, blood culture system. A microscopy station (bench with 2 microscopes) shall be needed. Requires a fume hood for preparation of volatile/irritant reagents. Laboratory should allow for up to 4 people working at a time	40
Mycology laboratory	Laboratory space for microscopy and isolation of fungi. Should be adjacent to but separate from the microbiology laboratory to protect the microbiology lab from fungal contamination. Should house a biosafety cabinet, microscope and incubator and allow one person to work at a time	9
Media Preparation Room	Laboratory space adjacent to the microbiology laboratory and wash-up. Should have a clean room protected from air currents (about 6M²) to enable aseptic pouring of culture media. The additional space shall have 2 water baths for holding media before it is poured and a refrigerator for storage of the media	9
Wash-up room	Extension of laboratory space for cleaning of re-useable laboratory items (mostly from the microbiology laboratory) and autoclaving of laboratory supplies like media. It is also the site	16

Room	Description	Space (m <sup>2</sup> )
	for autoclaving of laboratory waste for decontamination as well as temporary holding of decontaminated waste prior to its transportation to its site of destruction. Shall hold 2 autoclaves of about 200L capacity as well as 2 large sinks and a flash sluice sink	
Phlebotomy room	Space with desk, 2 seats and cabinets for supplies for phlebotomy. Linked to the reception by a window for transfer of specimens.	9
Specimen reception	Laboratory space for receiving specimens, entering them into the data system and performing some initial processing before their distribution to their laboratories. It shall be equipped with a biosafety cabinet, centrifuge and computer.	9
Staff Lounge	Time out room for staff for reading, meals and refreshments. Shall have some computers and books. Should be able to sit about 6 personnel at a time	16
Conference room	Room to hold meetings/workshops for up to 15 persons	30
Laboratory Director (Pathologist's office)	Administrative space: Table, computer, book shelf, storage of some critical documents and supplies.	12
Laboratory Manager's Officer	Administrative space: Table, computer, book shelf, storage of some critical documents and supplies. Allows for some limited lab work e.g. microscopy	12
Quality Assurance preparation room	Laboratory space dedicated to packaging and dispatching proficiency panels to peripheral laboratories	12
Waiting area	Shaded area outside laboratory with sitting benches for clients to wait. Should be well aerated and have adequate sunlight	20
Data room	Room for management of laboratory documents and records	12
Staff changing rooms	Space with separate male and female toilets, showers and lockers to allow staff change into laboratory/domestic attire	12
Patient ablutions	Separate male/ female toilets for patients	15
Janitor's room	Space for storage of janitor's utilities	3
Laboratory Store	Space for storage of laboratory supplies and equipment. It shall be supplementary to the central store.	20
Total utilizable space (M²)		268
Circulation space (30% of utilizable spaces) (M²)	For corridors, staircase etc.	80.4
Gross total space (M²)		348.4

 Table 2.2: General considerations for the proposed laboratory features

Item	Description
Fire safety	Most of the clinical laboratories are classified as <b>class C</b> (Low fire Hazard) laboratories.
	They should have the following fire safety features:
	Wall with a fire rating of one hour
	Walls extending to the underside of ceiling/floor slab above to maintain smoke and
	fire separation between rooms
	A fire alarm system in the laboratory area
	An easy and unobstructed fire egress should be provided
	Corridor for egress should not have items that feed fire (e.g. paper storage, waste items, electrical equipment, lockers)
	Egress corridors should be a minimum of 183 cm wide
	Two or more exits , with the furthest point in the lab being no more than 23 m from
	an exit

Item	Description
100111	Egress should be away from areas of high fire hazard e.g. fume hoods, gas
	cylinders, flammable storage cabinets
	Smoke detectors on the ceiling in the testing area
	A class 'B' extinguisher within the vicinity of the exit doors
	Paint for finishing should not be of flammable types like oil paint
Walls	Should be made of Brick and Concrete
	Should have a fire rating of one hour
	All walls should extend to the underside of the ceiling/floor slab above to maintain
	smoke and fire separation
	Finishing should be waterproof and smooth for easy cleaning
	Beige or cream silk vinyl paint should be used for finishing
	All penetration from pipes, ductwork, or wires should be sealed.
	Ceiling –wall – floor joints should be curved for easy cleaning
Floor	Should be smooth to ease cleaning
	Finishing should be soft white epoxy or Terrazzo
	Seams should be minimized to ease cleaning and minimize seepage of fluids
	Should be Slip resistant
	Should be impervious to liquids
	Should be resistant to chemicals and disinfectants.
	Any joints should be sealed with water and chemical resistant material
Floor Plan	Should ease workflow, allowing for logical movement during specimen processing
	e.g. reception-specimen preparation-staining-microscopy-printing and dispatch of
	results
Ceiling	The ceiling should exhibit high sound absorbance rating to minimize noise in the
	laboratory.
14/ 1/	Joints between Ceiling –wall – floor should be curved joints for ease of cleaning
Work tops and	Work tops should:    Depth and 70 and does (from front to use!)
furniture	<ul> <li>Be at least 76 cm deep (from front to wall)</li> <li>Be at least 91 cm above finished floor</li> </ul>
	- Be at least 91 cm above infished floor - Be smooth and easy to clean, water resistant, and resistant to acids, alkalis,
	disinfectants organic solvents and moderate heat. Epoxy resin is the preferred
	material
	- Edges of worktops should be rounded to ease cleaning.
	- Provide sufficient knee room for sitting tasks (At least 91 cm clear width)
	- Provide for lockable cupboards beneath the work tops.
	Spaces between/beneath furniture should be easy to clean and decontaminate
	Space between equipment should be 1 – 1.5 m
	Joints between fixed caseworks and countertops should be sealed to minimize
	harbourage of pests
	Should be flexible enough to enable future modifications of the space
	Shelves should be provided in the main working area. They should:
	- Start at 0.6M above the work top
	- Be 0.45M apart
Power	There should be a primary source of power for all electrical equipment and lighting
	Adequate number of sockets in vicinity of areas for equipment placement to avoid
	unfixed extension cables
	Sockets should be located above the worktop and away from sinks and other wet
	places
	Design should take into consideration specific power ratings of equipment  recommended at the facility.
	recommended at the facility
	Cabling should not interfere with movement

<ul> <li>Provisions for additional sockets to allow flexibility in case of additional equipment/reorganization of floor plan</li> <li>Provision of 24 hour stand-by power backup source (preferably inverters &amp; accumulators) to supply refrigerators, freezers and incubators</li> <li>Water and</li> <li>Tank should be installed to ensure uninterrupted flow of water</li> <li>There should be no cross-connection between the laboratory water and the put water systems. An anti-backflow valve should be installed to protect the public valves water systems. An anti-backflow valve should be installed to protect the public valves.</li> <li>Each lab room should have a clean sink for hand washing preferably near the edoor</li> <li>Staining sinks should be resistant to corrosives like acids and stains</li> <li>Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep</li> <li>Eyewash stations should be provided in each laboratory preferably near the har wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	vater xit ad the
equipment/reorganization of floor plan  Provision of 24 hour stand-by power backup source (preferably inverters & accumulators) to supply refrigerators, freezers and incubators  Water and Plumbing  Tank should be installed to ensure uninterrupted flow of water There should be no cross-connection between the laboratory water and the put water systems. An anti-backflow valve should be installed to protect the public system  Each lab room should have a clean sink for hand washing preferably near the edoor Staining sinks should be resistant to corrosives like acids and stains Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep Eyewash stations should be provided in each laboratory preferably near the har wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side  Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.  Laboratory drainage should not be continuous with non-laboratory drainage Flash sluice sink should be provided in the wash up Taps should be elbow operated (Hands free) Drainages from laboratory sinks and basins should be closed and connected to	vater xit ad the
<ul> <li>accumulators) to supply refrigerators, freezers and incubators</li> <li>Water and Plumbing</li> <li>Tank should be installed to ensure uninterrupted flow of water</li> <li>There should be no cross-connection between the laboratory water and the put water systems. An anti-backflow valve should be installed to protect the public valve system</li> <li>Each lab room should have a clean sink for hand washing preferably near the eddoor</li> <li>Staining sinks should be resistant to corrosives like acids and stains</li> <li>Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep</li> <li>Eyewash stations should be provided in each laboratory preferably near the har wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	vater xit ad the
<ul> <li>Tank should be installed to ensure uninterrupted flow of water</li> <li>There should be no cross-connection between the laboratory water and the put water systems. An anti-backflow valve should be installed to protect the public valves system</li> <li>Each lab room should have a clean sink for hand washing preferably near the eddoor</li> <li>Staining sinks should be resistant to corrosives like acids and stains</li> <li>Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep</li> <li>Eyewash stations should be provided in each laboratory preferably near the har wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	vater xit ad the
<ul> <li>There should be no cross-connection between the laboratory water and the public water systems. An anti-backflow valve should be installed to protect the public system</li> <li>Each lab room should have a clean sink for hand washing preferably near the edoor</li> <li>Staining sinks should be resistant to corrosives like acids and stains</li> <li>Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep</li> <li>Eyewash stations should be provided in each laboratory preferably near the hall wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	vater xit ad the
<ul> <li>water systems. An anti-backflow valve should be installed to protect the public valves system</li> <li>Each lab room should have a clean sink for hand washing preferably near the eddoor</li> <li>Staining sinks should be resistant to corrosives like acids and stains</li> <li>Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep</li> <li>Eyewash stations should be provided in each laboratory preferably near the hall wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	vater xit ad the
<ul> <li>Each lab room should have a clean sink for hand washing preferably near the edoor</li> <li>Staining sinks should be resistant to corrosives like acids and stains</li> <li>Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep</li> <li>Eyewash stations should be provided in each laboratory preferably near the har wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	id the
<ul> <li>Laboratory sinks should be at least 41 cm wide x 41 cm long x 15 cm deep</li> <li>Eyewash stations should be provided in each laboratory preferably near the har wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	the
<ul> <li>Eyewash stations should be provided in each laboratory preferably near the hal wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	the
<ul> <li>wash basin. They should be 84 -114 cm above the floor and at least 15cm from wall or obstruction on either side</li> <li>Emergency showers must be provided. They should be 208 – 244 cm above the floor and no more than 30.5m from hazardous area.</li> <li>Laboratory drainage should not be continuous with non-laboratory drainage</li> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	the
floor and no more than 30.5m from hazardous area.  Laboratory drainage should not be continuous with non-laboratory drainage Flash sluice sink should be provided in the wash up Taps should be elbow operated (Hands free) Drainages from laboratory sinks and basins should be closed and connected to	)
<ul> <li>Flash sluice sink should be provided in the wash up</li> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	
<ul> <li>Taps should be elbow operated (Hands free)</li> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	
<ul> <li>Drainages from laboratory sinks and basins should be closed and connected to</li> </ul>	j
septic tank or closed deep pit as it may contain body fluids/bio-hazardous mate	ials
Water source and drainage system for water distiller should be provided	
Ventilation • Windows should:	
- Enable adequate lighting	
<ul> <li>Allow cross-ventilation with 6 – 10 air changes per hour</li> </ul>	
<ul> <li>Ventilation on external doors and window tops in the glass glazing and not</li> </ul>	steel
plates.	
<ul> <li>Not be in direction of prevailing winds to avoid disturbance of equipment lik</li> </ul>	<del>)</del>
scales and generation of aerosols	
- Should have mesh screens to keep insects out	
- Should cover an area 15 – 20 percent of the floor area.	
<ul> <li>Should not be embedded, instead should be on the surface (ducted / trunked).</li> </ul>	
Should be wide enough to enable additional expansion	
Should be located above the bench	
Lighting • Laboratory should be adequately lit (500 Lux of light are required)	
<ul> <li>Ceiling lights should be mounted parallel to the work surface to provide uniform</li> </ul>	
shadow-free and glare-free illumination of the laboratory work top.	
<ul> <li>Typical ceiling mounted lights should be 61 x 122 cm or 61 x 61 cm fixtures with</li> </ul>	а
parabolic lens placed in the ceiling grid	
Dimmers that allow users to adjust light intensity should be considered microscopy areas	for
Wall brackets and • There should be a provision for hanging coats in each laboratory close to the ex	
<ul> <li>There should be provisions for a clean area outside the laboratory for personn keep their bags/domestic issues</li> </ul>	el to
Time out room  • There should be a time out room adjacent to the laboratory to work as office	and
staff room	
Waste   Space for temporary waste storage should be provided (within/close to the was	1-
management up)	
Doors   • Two exits should be provided. One for routine use and one as an emergency ex	it.
<ul> <li>Doors should be within 23 m of furthest point of the laboratory for big laboratoric</li> </ul>	
<ul> <li>Laboratory exit doors should be self-closing to contain the laboratory area from</li> </ul>	s

Item	Description
	<ul> <li>surrounding area</li> <li>Should have a vision panel</li> <li>Main laboratory doors should swing in the direction of travel when escaping a fire in the laboratory</li> <li>Doors should NOT be sliding type</li> <li>Utility door (at least one of the lab doors) should be at least 122 cm wide to enable movement of large equipment</li> <li>Material used should have a fire rating of 1 hour</li> </ul>
Security	<ul> <li>Adequate lockable cupboards, lockable store room, for storage of major equipment poisons and chemicals.</li> <li>All windows and vents must be protected with strong burglar proofing.</li> <li>All doors must be provided with secure locks.</li> </ul>

### 2.5 PROJECT ALTERNATIVES

## 2.5.1 'No Project' Scenario

The "No project scenario" means that the proposed project would not be implemented. This would be based on the assumption that existing facilities would still effectively deliver required services without any improvements. With this alternative, the financial costs and environmental and social impacts associated with implementation of this proposed project would not manifest. However, this was not found to be a sustainable option. Without the proposed development, Uganda Government would not be able to improve access to diagnostic services, potential jobs creation and secondary socio-economic benefits which the proposed development would have created to the vulnerable populations living in the Eastern, mid-Eastern sub-regions and patients from cross-border areas of Kenya. More importantly, if this project is not implemented, existing facilities cannot deliver desired services in their current dilapidated state.

#### 2.5.2 "Action" Scenario Alternatives Considered

The "Action Scenario" means that the proposed project will be implemented as planned. The major benefits of the proposed project are improving availability and access to modern medical services currently not available due to dilapidated infrastructure and lack of equipment and facilities at Mbale Regional Referral Hospital. This option considered two alternatives discussed in sections below:

### 2.5.2.1 Renovation of existing facility

The option of renovating existing laboratory facilities would involve limited internal modification of the built environment hence entailing demolition, remodelling and reconstruction of walls. This option requires less resources (funds, workforces and material) and time, in addition to minimising construction impacts such as:

- Indoor dust
- Exhaust emissions since construction traffic volume will be smaller on roads:
- Construction waste and rubble since only some walls would be demolished;

Besides denying the public laboratory services for some part of renovation period, the existing laboratory facility after remodelling and reconstruction would not provide necessary adequate space to accommodate laboratory staff, equipment, patients, samples and materials, and maintenance as

proposed by WB guidelines (Section 5.5.2) and WHO guidelines (section 0) in order to provide the desired diagnostic services.

## 2.5.2.2 Construction of new facility

Besides allowing public to continue accessing existing laboratory services, the option of constructing new laboratory facilities, would maximise desired development benefits of this project since it is designed to accommodate laboratory staff, equipment, samples and materials, maintenance, and waste management as required by national and international standards.

Implementation of this option would require a longer period of time to accomplish and use of more resources (funds, workforces and material). Consequently, this is likely to cause and accelerate construction and operational socio-environmental impacts. However, this ESIA study has assessed these impacts and proposed measures to enhance beneficial impacts and mitigate adverse impacts (section 0), thus making this option cost effective and more sustainable.

#### 2.6 PROJECT CLASSIFICATION FOR ESIA PURPOSES

### 2.6.1 Classification according to Uganda's National Environment Act, Cap 153

The *Third Schedule* of the National Environment Act Cap 153 prescribes projects for which EIA is mandatory and according to Section 1 and Section 12 (b & d) in this Schedule, the project should undertake detailed EIA.

## 2.6.2 Project Classification according to World Bank

The Bank classifies a proposed project into one of four categories, depending on the type, location, sensitivity, and scale of the project and the nature and magnitude of its potential environmental impacts.

### a) Category A

A proposed project is classified as Category A if it is likely to have significant adverse environmental impacts that are sensitive, diverse, or unprecedented. The project impacts may affect an area broader than the sites or facilities subject to physical works. Environmental assessment for a Category A project examines the project's potential negative and positive environmental impacts, compares them with those of feasible alternatives including the "without project" situation, and recommends any measures needed to prevent, minimize, mitigate, or compensate for adverse impacts and improve environmental performance.

### b) Category B

A proposed project is classified as Category B if its potential adverse environmental impacts on human populations or environmentally important areas, including wetlands, forests, grasslands, and other natural habitats, are less adverse than those of Category A projects. These impacts are site-specific; few if any of them are irreversible; and in most cases mitigation measures can be designed more readily than for Category A projects. Here the assessment also involves examination of the project's potential negative and positive environmental impacts and recommends any measures needed to

prevent, minimize, mitigate, or compensate for adverse impacts and improve environmental performance.

The proposed project is classified as EA Category B. The proposed construction, equipping and operation of the proposed laboratory will be restricted within the hospital premises with the exception of waste management/ pollutants generated that may go beyond the boundaries of the hospital. The project will not directly affect ecosystems such wetlands, forests, grasslands, etc.

## c) Category C

A proposed project is classified as Category C if it is likely to have minimal or no adverse environmental impacts. Beyond screening, no further environmental assessment is required for a Category C project.

## d) Category FI

A proposed project is classified as Category FI if it involves investment of Bank funds through a financial intermediary, in subprojects that may result in adverse environmental impacts.

## 3 ESIA METHODOLOGY

### 3.1 INTRODUCTION

This section describes the broad principles of methodology of the ESIA indicating approaches, practices and techniques used for impact identification, quantification, analysis and abatement. Impacts of the project were predicted in relation to environmental and social receptors and natural resources. This was accomplished by comparing prevailing conditions ("pre-project") and "post-project" situations.

The requirement for environmental assessment in Uganda is set out by the National Environment Act (1995) and the Environmental Impact Assessment Regulations (1998). The process was guided by the EIA Guidelines (NEMA, 1997).

The methodology used consisted of a review of Uganda's institutional arrangements, regulations and policies and those of the World Bank and World Health Organisation. Also done were baseline measurements, identification of impact receptors and their relation to project's site and consultation with relevant stakeholders. Other activities included data collection & analysis, review of engineering designs of the laboratory, utilizing national, WHO guidelines and relevant healthcare waste management literature

Impacts of the project were predicted in relation to environmental and social receptors and natural resources. This was accomplished by comparing prevailing conditions ("pre-project") and "post-project" situations.

#### 3.2 ESTABLISHMENT OF ENVIRONMENTAL & SOCIO-ECONOMIC BASELINE CONDITIONS

Baseline air quality and noise levels were measured, not only to inform construction contractors about pre-construction conditions existing at proposed sites, but also the first annual environmental audit: subsequent baseline conditions would be those values measured in the first annual full environmental audit. These were determined through the following actions:

<u>Air quality:</u> Baseline air quality was measured using a pair of digital MX6 iBrid™ portable gas meters (Industrial Scientific-Oldham) and a Microdust 880nm digital aerosol monitor (Casella®) (Photo 3.1). Measurement points or locations were selected basing on presence of potential receptors.

<u>Ambient noise:</u> Measurement of ambient noise levels was carried out using a precision integrating sound level meter (Photo 3.2), with an active range of 0-140 decibels (dB) and complying with IEC 651 and ANSI S4 standards. Baseline noise measurements were undertaken at locations around the proposed storage facility site with potential receptors. A Casella CEL-621C digital noise logger was set to record for a sample period of ten minutes at each of the selected locations. The assessment procedure involved recording the LA<sub>MAX</sub> and LA<sub>MIN</sub> decibel levels. Measurement points were recorded using a GPS receiver and the noise sources together with the ambient environment at each location noted.





Digital 6-gas MX6 Ibrid meter

Photo 3.1: Digital CASELLA microdust and 6-gas MX6 iBrid™ meters to be used measure air quality



Noise measurement will be done with a CASELLA CEL-621C2/K1 Integrating 1/3 Octave Band Sound Level Meter (Class2)

Photo 3.2: Noise measurement meter



Photo 3.3: Taking noise and air quality measurement behind T.B ward near the proposed site

To establish the socio-economic baseline parameters: consultative meetings were conducted in the neighbouring communities to obtain primary data in the project area and with relevant agencies for secondary data. Secondary data collected included population, household energy sources, education and health status, waste management and sanitary facilities, food and cash crops, water sources, sources of income and existing land tenure systems, among others.

#### 3.3 CONSULTATION AND PROJECT DISCLOSURE

Relevant and adequate project information was provided to stakeholders to enable them to understand project risks, impacts and opportunities. Stakeholder consultation aimed at:

- Generating understanding of the project
- Understanding local expectations of the project
- Characterising potential environmental, socio-economic impacts
- Garnering consensus on mitigation options

The techniques used were: face-to-face or telephone interviews, data and literature review, and email consultation correspondences. Stakeholders consulted included Mbale RRH administration, Mbale district and municipality officials.

## 3.4 REVIEW OF POLICY, REGULATIONS, INSTITUTIONAL FRAMEWORK & INTERNATIONAL GUIDELINES

This was done to determine if the proposed project was in line with national policies and met environmental laws and regulations, to achieve this, the following actions were undertaken:

- i) Review of national environmental laws, policies and institutional framework.
- ii) Review of World Bank Group (IDA is one of the 5 World Bank Group member organizations) guidelines on environment.
- iii) Review of World Health Organisation (WHO) guidelines on biosafety

#### 3.5 IMPACT IDENTIFICATION AND ANALYSIS

### 3.5.1 Impact Description

Describing a potential impact involved an appraisal of its characteristics, together with the attributes of the receiving environment. Relevant impact characteristics included whether the impact is:

- Adverse or beneficial:
- Direct or indirect:
- Short, medium, or long-term in duration; and permanent or temporary;
- Affecting a local, regional or global scale; including trans-boundary; and
- Cumulative (such an impact results from the aggregated effect of more than one project
  occurring at the same time, or the aggregated effect of sequential projects. A cumulative
  impact is "the impact on the environment which results from the incremental impact of the
  action when added to other past, present and reasonably foreseeable future actions").

Each of these characteristics is addressed for each impact. Consideration of the above gives a sense of the relative **intensity** of the impact. The **sensitivity** of the receiving environment was determined by specialists based on the baseline data collected during the study.

## 3.5.2 Impact Evaluation

Each impact is evaluated using the criteria listed in Table 3.1. To provide a relative illustration of impact severity, it is useful to assign numerical or relative descriptors to the impact intensity and receptor sensitivity for each potential impact. Each is assigned a numerical descriptor of 1, 2, 3, or 4, equivalent to very low, low, medium or high. The severity of impact was then indicated by the product of the two numerical descriptors, with severity being described as negligible, minor, moderate or major, as illustrated in Table 3.1. This is a qualitative method designed to provide a broad ranking of the different impacts of a project. Illustrations of the types of impact that were assigned the different grades of severity are given in Table 3.2.

**Table 3.1:** Classification of impact evaluation

	Classification	Description
1	Extent:	Evaluation of the area of occurrence/influence by the impact on the subject environment; whether the impact will occur on site, in a limited area (within 2 km radius of the site); locally (within 5 km radius of the site); regionally (district wide, nationally or internationally).
2	Persistence/Duration:	Evaluation of the duration of impact on the subject environment, whether the impact was temporary (<1 year); short term (1 – 5 years); medium term (5 – 10 years); long term (>10); or permanent.
3	Social Context / Sensitivity or Potential for Stakeholder Conflict:	Assessment of the impacts for sensitive receptors in terms of ecological, social sensitivity and such things as rare and endangered species, unusual and vulnerable environments, architecture, social or cultural setting, major potential for stakeholder conflicts. The sensitivity classification is shown below:  *High sensitivity:* Entire community displacement, destruction of world heritage and important cultural sites, large scale stakeholder conflict, etc.  *Medium sensitivity:* Displacement of some households, moderate level of stakeholder concern  *Low sensitivity:* No displacements, no potential for stakeholder conflict.
4	Regulatory and Legal Compliance:	Evaluation of the impact against Local and International legislative requirements.  **High:* Prohibition terms for specific activities/emissions. Major breach of regulatory requirements resulting in potential prosecution or significant project approval delays.  **Medium:* Potential breach of specific regulatory consent limits resulting in non-compliance.  **Low:* No breach of specific regulatory consent limits anticipated.
5	Overall Impact rating (Severity):	Using a combination of the above criteria, the overall severity of the impact was assigned a rating Severe, Substantial, Moderate, Minor and negligible. Refer to Table 5.2 for broad categories of impact for each rating.  Note: These are just guidelines that will constitute professional judgement required in each individual case.

## 3.5.3 Impact Significance

Impact significance is determined from an impact significance matrix (Table 3.2) which compares severity of the impact with probability of its occurrence. Impact significance criteria are as follows:

- Very High (VH) and High (H): These denote that the impact is unacceptable and further mitigation measures must be implemented to reduce the significance. Shaded red in the Table 4.2.
- **Medium (M):** Impacts in this region are considered tolerable but efforts must be made to reduce the impact to levels that are as low as reasonably practical. Shaded yellow in the impact significance matrix.
- Low (L): Impacts in this region are considered acceptable. Shaded green.

**Table 3.2:** Determination of impact severity

			Sensitivity of receptor						
		Very low Low		Medium	High				
		1	2	3	4				
act	ਪੁਰੂ Very low 1		1 Negligible	2 Minor	3 Minor	4 Minor			
of impact	2	2 Minor	4 Minor	6 Moderate	8 Moderate				
Intensity	Medium 3		3 Minor	6 Moderate	9 Moderate	12 Major			
Int	High		4 Minor	8 Moderate	12 Major	16 Major			

#### 3.6 CUMULATIVE IMPACTS

Cumulative effects manifest when socio-environmental conditions are already or will be affected by past or reasonably probable future development or activities. The ESIA identified current, past and probable future similar activities that may compound socio-environmental conditions in the project area.

#### 3.7 MITIGATION OF ENVIRONMENTAL IMPACTS

Mitigation measures are designed in order to avoid, reduce, mitigate, or compensate for adverse environmental and social impacts and inform the Environmental and Social Management Plan (ESMP).

## 4 ENVIRONMENT AND SOCIO-ECONOMIC BASELINE

### 4.1 INTRODUCTION

This section describes environmental and social baseline conditions of the area in which the proposed laboratory is to be located and in which impacts may be experienced. Proposed site is located in Mbale Regional Referral Hospital in Mbale Municipality (See Section 2.2). The description is designed to enable identification of particularly sensitive receptors and resources around the proposed site that may be vulnerable to impacts arising from the project.

#### 4.2 ENVIRONMENT PROFILE

### 4.2.1 Climate

The climate of Mbale is influenced by its proximity to the equator and its position at the foot of Wanale Ridge. The climate is warm and humid without extremes; with temperatures ranging from  $23 - 25^{\circ}$ C. Rainfall is fairly distributed ranging between 1250 mm and 1750 mm per year (Figure 4.1).

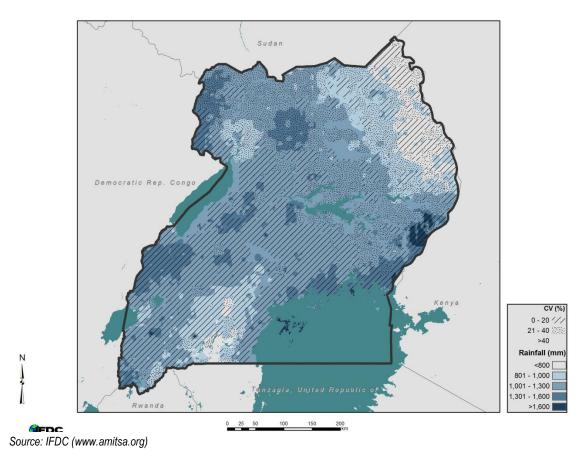


Figure 4.1 Distribution of annual rainfall in Uganda

### 4.2.2 Air

Uganda's currently has no comprehensive database about national air quality. However, motor vehicles are major emission sources for several air pollutants, including nitrogen oxides (NO<sub>X</sub>), carbon monoxide (CO), particulate matter (PM), and hydrocarbons (HCs) (WHO, 2005). Other sources include burning of

wastes and this was found to be a major source of emissions at the proposed project site and neighbourhood. Measurements carried out at selected locations at the proposed project site are indicated in Table 4.1. There were relatively high levels of particulates, carbon dioxide, carbon monoxide and nitrogen dioxide.

Table 4.1: Air quality at the proposed project site

Easting	Northing	Particulates (µg/m³)	NO <sub>2</sub> (ppm)	CO <sub>2</sub> (%)	NH <sub>3</sub> (ppm)	H <sub>2</sub> (ppm)	PID (ppm)	CO (ppm)	O <sub>2</sub> (%)
630807	119224*	557	1	0.09	1	3	7.2	4	20.8
630782	119106**	1	1.2	0.03	0	0	0.4	0	20.9

<sup>\*</sup> Open solid waste burning

#### 4.2.3 Noise

Given that the hospital is located in an urban setting, it is exposed to noise arising from both human and transportation activities. The noise was mainly generated by vehicles and motor cycles moving in and out of the hospital. Noise levels recorded at the proposed project are presented in Table 4.2.

**Table 4.2:** Levels of noise at the proposed project site

Easting	Northing	LAF <sub>Max</sub>	LA <sub>eq</sub>	LA <sub>90</sub>	LA <sub>50</sub>	Notes
630807	119224	67.9	47.6	40.5	44.5	Chirping birds. Human conversation. Distant public address system.
630782	119106	73.4	54.4	50	52.5	Chirping birds. Human conversation. Vehicular traffic. Public address system.

## 4.2.4 Water Resources and Drainage

The municipality is drained from east to west by three major rivers that have their sources on Wanale Ridge. River Nashibiso and its tributary Napwoli drain into the southern part of the town. These are bound by an extensive plain under forest reserve management. River Nabiyonga and its major tributary Namatsio drain across the northern area of the town. Several primary and secondary drains have been developed to originate from within the town area and drain into these rivers. All the mentioned rivers drain into River Namatala which forms the north-west boundary of Mbale Municipality.

The proposed site is bordered with drainages carrying stormwater away from the hospital (Photo 4.1).

## 4.2.5 Geology, Geomorphology and Soils

Mbale has gentle hills and valleys covering a geographical area of 24.35 sq. km. Its relief varies from 1212 m above sea level in the South Eastern Border region to 1080 m above sea level, in the west. The soils of Mbale municipality are largely of the formalistic gneiss that is in the last stages of tropical weathering. Their volcanic nature renders them fertile for support of plant life. The larger part of the municipality is developed given the firm and stable nature of complex basement rendering it ideal for the development of housing to the high density settlement. The types of soils in Mbale District and the Municipality are presented in Figure 4.2.

<sup>\*\*</sup> Vehicular traffic



**Photo 4.1:** Some of the structures and overcrowding nature near the entrance of Mbale RRH

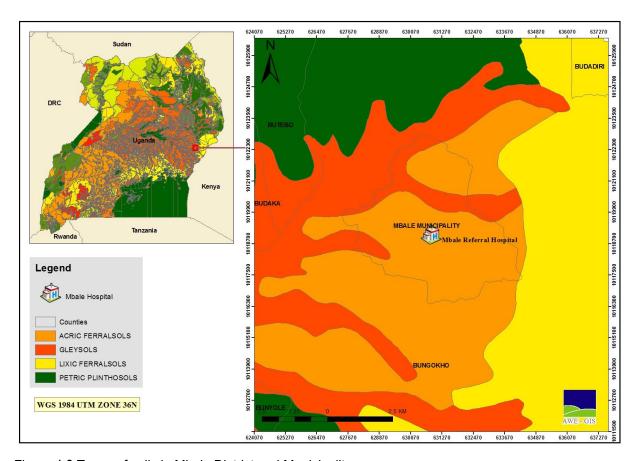


Figure 4.2 Types of soils in Mbale District and Municipality

## 4.3 SOCIO-ECONOMIC AND LAND USE ACTIVITIES

### 4.3.1 Administrative Structure

Mbale Municipal Council is comprised of three Divisions namely: Northern, Industrial and Wanale (Figure 4.3). These Divisions are substantiative body corporate Local Government Councils under Part II, Sec. 4 subsection 4(b) of the Local Government Act 1997. The Divisions are subdivided into Wards and Cells (Table 4.3). The project hospital is located in the North Central Ward, Northern Division in Mbale Municipality.

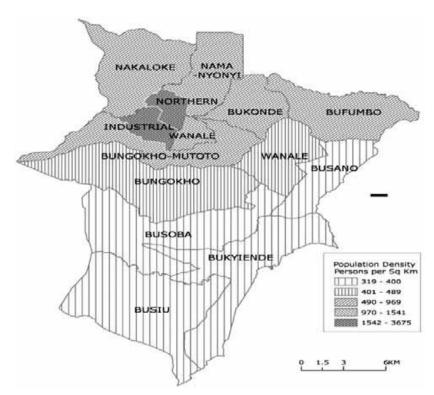


Figure 4.3 Administrative boundaries of Mbale district and the location of the Municipality

Table 4.3: Wards and Cells of Mbale Municipal Council

Divisions	Wards	Cells				
Wanale	Boma	Masaba, Union, Elgon, Nakhupa, Bungokho, Fairway, Bukwa, Nabigyo and Wanale				
	Busamaga West	Nabweya, Health Centre, Mosque and Bumboi				
	Busamaga East	Nampanga, Butandiga, Namalogo and Namatsyo				
	Mukhubu	Isebele, Sawa, Shiende and Zesui				
	Mooni	Namubiru, Mutoto, Nashibiso and Nagudi				
Northern	Nabuyonga	Sebei, Buwalasi, Kichafu, Kisenyi, Mulembe and Magezi				
	Nkoma	Busajja, Hygiene, Buyonjo, Bujoloto, Gangama, Senkulu, Wanambwa and Nambozo				
	Hospital, Clock Tower, Duka, North Road, Byasala, Uhuru, Pesa and Nkokonjeru					
	Namakwekwe Nabigyo, Link Road, Bufumbo, Mission, Kachumbala, Gudoi, Mugisu					
		College and Mpumude				
	University	Staff, Sheraton, Northern and Village				
Industrial	South Central	St. Andrew's, Wasike, Naboa, Republic Street, Foods, Lwakhakha, Park, Police, Kale and Cathedral				
	Masaba	Butaleja, Bumasifa, Pallisa, Malawa, Bugwere and Temuteo Mukasa				
	Malukhu	Sironko, Busano, Majanga, Wanyera, Muti, Primary and Muyembe				
	Namatala	Somero, Mvule, Sisye, Nyanza, Wandawa, Doko, Bubirabi and Kiduda				

### 4.3.2 Employment

Mbale is strategically located in Uganda which makes it attractive and competitive. It is surrounded by a rich agricultural region which provides the Municipality with agricultural produce. Its close location to Kenya provides the town with opportunities for various economic activities and trans-border trade. However, the informal sector is the major source of employment for the residents of Mbale. The sector consists of small entrepreneurs and people with flexible but non-permanent employment, although a large number of entrepreneurs are not registered with any authority. The lack of opportunities for formal sector employment and the decline in minimum wage has led to the growth of the informal sector whose activities are largely unmeasured, unregulated and unaccounted for (UN-Habitat, 2012). The main economic activities carried out in Mbale include trade, transport services such as transport on motor cycles (boda-bodas), telecommunication services, restaurants, lodges and hotel services, and food processing industries. In slum areas however, there are high levels of unemployment, especially among the youth.

#### 4.3.3 Land Tenure and Use Activities

Land tenure is under customary and freehold system and the municipality has no control over land use because of the customary nature of land tenure. The Municipality has an old structure plan that specifies various land uses according to various zones, but the plan needs to be revised because it was drafted by the former colonial authorities and is out-dated. It does not own land for public use. The privatization/ liberalization of the economy has led to the growth of buildings and structures, many of which are built without following the environmental and zoning guidelines. Slums have been allowed to mushroom uncontrolled, further contributing to the degradation of land. The lack of basic social amenities in some areas has led to increased development in areas that have access to the basic social amenities such as water, sewer lines and electricity; this has led to overcrowding in certain parts of the town. Over-population and land shortage is forcing people to encroach on flood plains, road reserves, drainage channels, and public land.

#### 4.3.4 Population and Demographic Characteristics


The population of Mbale Municipality is distributed in the three divisions with the largest, most populous and economically most prosperous being Industrial Division with 45 percent followed by Northern Division 40 percent and then Wanale Division with 15 percent (Table 4.4). The large population in Industrial Division is attributed to the large population of immigrants as compared to Wanale Division, which is predominately a residential area comprising mainly senior Quarters. Industrial Division is also the location of most industrial setups in the municipality and covers the busiest parts of the central business district. This explains it's relatively high population. Wanale division originally a residential area for the top administration from colonial times has remained basically residential with mainly hotels and only the slum dwellings in Mooni and Busamaga being densely populated.

**Table 4.4:** Mbale municipal population distributions by division

Division	Male	Female	Total	Sex Ratio
Industrial	20,500	20,500	41,000	50:50
Northern	17,800	19,300	37,100	48:52
Wanale	6,600	7,100	13,700	48:52
Total	44,900	46,900	91,800	49:51

Source: UBOS 2007, Uganda Population& Housing Census Report


The population pyramid (Figure 4.4) shows the sex age composition of Mbale emphasizing the need to plan more for children as they are the majority.

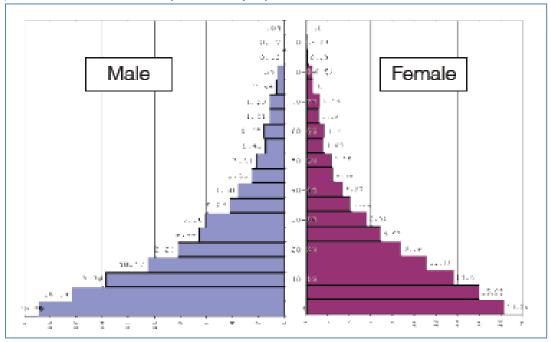

Source: UN-Habitat, 2012

Figure 4.4 Population pyramid of Mbale Municipal Council

The population density in Industrial division and Northern division was between 1542 – 3675 persons per sq. km while in Wanale division between 970 and 1541 persons per sq. km (Figure 4.5). The population projections from 2004 to 2012 are presented in Table 4.5.

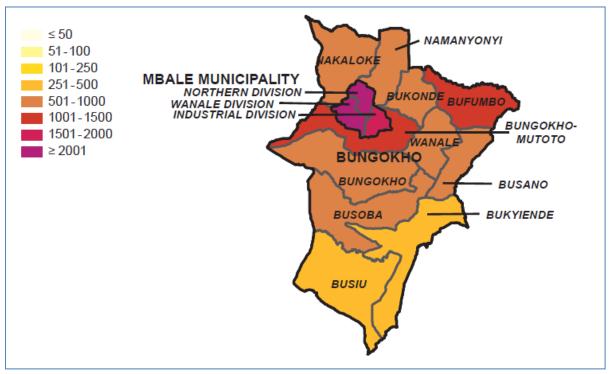

Source: MWE, 2010

Figure 4.5 Population densities by sub-county in Mbale district (persons/km²)

**Table 4.5:** Population projections (2004 – 2012) for Mbale Municipality

Year	2004	2005	2006	2007	2008	2009	2010	2011	2012
Male	36,300	37,200	38,200	39,300	40,300	41,400	42,500	43,700	44,800
Female	38,000	38,800	39,600	40,400	41,300	42,200	43,100	44,000	44,900
Total	74,300	76,000	77,800	79,700	81,600	83,600	85,600	87,700	89,700

## 4.3.5 Level of Education and Literacy

Educational institutions are many, ranging from nursery, primary, and secondary schools to higher institutions of learning, which vary from privately owned to Government institutions. Most of these institutions are found in the Northern Division, while the rest are in Wanale Division. The major higher institutions of learning include: the Islamic University in Uganda, the School of Clinical Officers, and the Mbale School of Hygiene. Others include Mbale Secondary School believed to be one of the oldest schools in Eastern Uganda. The literacy level is at 67.4 percent.

#### 4.3.6 Healthcare Services

There are a number of health institutions in the municipality, with the Mbale Regional Hospital being the largest and serving as a referral hospital for the eastern region of Uganda. Other health institutions include the CURE Hospital for specialized orthopaedic services, the Ahamadiya Hospital, the Municipal Health Centre, Namakwekwe Maternity Centre and Namatala Health Centre IV. Private clinics, First Aid posts, and drug shops are fairly distributed in the municipality.

Government Health Centres procure drugs using the Primary Health Care (PHC) Conditional Grant from the Central Government. The Municipality however, has limited local revenue allocated for the procurement of drugs. As a result, there is constant shortage of drugs and equipment in health centres which compromises the provision of quality and affordable health care to the residents of Mbale. This has made the population vulnerable to the outbreak of diseases such as dysentery, cholera, malaria, diarrhoea, measles, tetanus, and HIV/ AIDs.

The HIV/AIDs epidemic, which Uganda has experienced over the last two decades, is believed to have increased the incidence of orphaned children in Uganda. The number of orphaned children who are less than 18 is 34,744 (Uganda population census UBOS, 2002). According to the State of Uganda Population Report 2010 however, there has been a decline of HIV/ AIDs from the peak of 18 percent in 1992 to 6.4 percent in 2009 in Uganda. This positive achievement has been achieved through deliberate HIV/AIDS reduction policies which Mbale district has benefited from.

Major providers of laboratory/diagnostic services are Mbale Regional Referral Hospital and the Joint Clinical Research Centre (JCRC): JCRC offers a whole range of diagnostic and monitoring laboratory tests including CD4, DNA, HIV Rapid and ELISA testing, HIV drug resistance, Viral load, Syphilis tests, among others. The microbiology laboratory at the site is able to perform TB screening (sputum analysis for AAFBs); the autoclave for waste disposal is fully functional. Other laboratories at the site include virology, haematology, chemistry and immunology.



Photo 4.2: Specimen reception of the existing Photo 4.3: Microbiogical section of laboratory laboratory






Photo 4.4: Fridge used for storage of blood at the lab



**Photo 4.5:** T.B laboratory at the proposed project site

#### 4.3.7 Household Characteristics, Livelihoods and Poverty Level

The household characteristics, livelihoods and poverty have a direct impact healthcare of communities and vice versa. A variety of health conditions such as air quality, building standards, noise, contaminated water, food and toilet facilities are evident in some household environments and these normally undermine the health of status of the occupants. On the other hand, better living conditions can be achieved by a health society with less expense on healthcare which can be achieved by early diagnosis and treatment of an ailment.

Mbale Municipality is characterized by high levels of poverty, poor and illegally constructed housing structures, overcrowding, poor sanitation, and inadequate basic services delivery. This situation can be attributed to rapid urbanization that has not matched the capacity to plan and manage urban growth. The growth of slums has therefore become a natural indicator of the effects of rapid urbanization.

The average household sizes for each division in Mbale Municipality are indicated in Table 4.6. According to the 2002 Uganda Population and Housing Census, approximately 51 percent or 35,922 of the residents of Mbale Municipality lived in an independent house or flat and the other 49 percent or 34,514 continued to share their accommodation.

Table 4.6: Household average size and headship by division

Division	Average Household Size	Distribution by households head (%)		
		Female headed	Made headed	Child headed
Northern	3.7	25.1	73.1	1.8
Industrial	4.3	18.1	80.2	1.8
Wanale	4.7	18.5	80.0	1.5
District	5.6	11.2	88.8	0.0

Source: UBOS, 2012

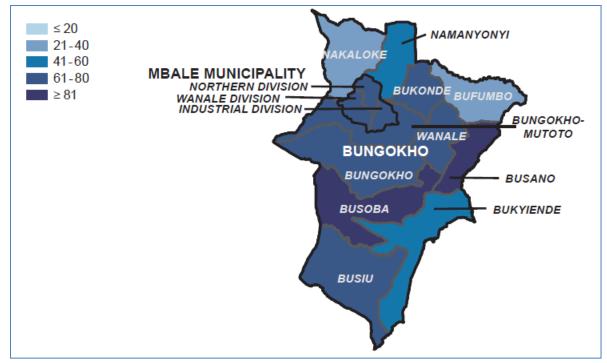


**Photo 4.6:** Some of the structures and overcrowding nature near the entrance of Mbale RRH

Like in other urban centres of Uganda, rural to urban migrations has resulted in the fast development of informal settlements in the municipality as most of the immigrants are poor and cannot afford to live in good quality houses. Notable slum areas in Mbale include: Kikamba, Barracks, Mutukula, Kiteso, Bulago, Bujoloto cells, Kiduda, Karimojong, Sisye and Muvule wards.

## 4.3.8 Water Supply

Mbale Municipality is connected to the water supply system provided by the National Water and Sewerage Corporation. Access to safe drinking water by sub-county is presented in Figure 4.6 with the municipality having accessibility ranging between 61 and 80 percent. The distribution of different types of water sources in the district is presented in Figure 4.7. In addition, the hospital has a separate groundwater supply system mainly catering the wards of the expectant mothers. This is located across the proposed project site.



Source: MWE, 2010

Figure 4.6 Access to safe drinking water in Mbale district (%)

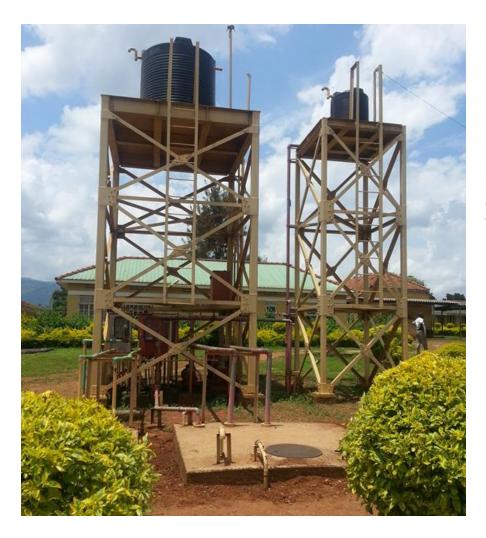


Photo 4.7: Groundwater supply system for emergency water supply to the ward of expectant mothers

## 4.3.9 Waste Management

There is only one disposal ground in Mbale municipality situated in the industrial area of Industrial division. However, the compositing facility receives only non-hazardous and biodegradable waste. It also receives non-biodegradable waste of domestic nature for landfilling. The waste from the hospital used to be collected by contractor "Green Label" who no longer provides the service. The municipality also provided a skip to the hospital only for disposal of non-hazardous domestic solid waste. An incinerator was installed in the hospital though this was reported to be inadequate for the amount of medical waste generated in the hospital. The assessment report for the incinerator is present in Appendix B. At the time of this study, the incinerator was not yet commissioned and thus not operated. Although the waste in the hospital is segregated, for example, in marked bins located in the laboratory, when it is all dumped and burnt openly in a gazetted dumping area behind the TB ward.



Photo 4.8: Incinerator installed at the hospital behind the TB ward



Photo 4.9: Solid waste collection area



Photo 4.10: Incinerators used for burning waste



Photo 4.11: Open dumping and burning of medical waste at Mbale RRH

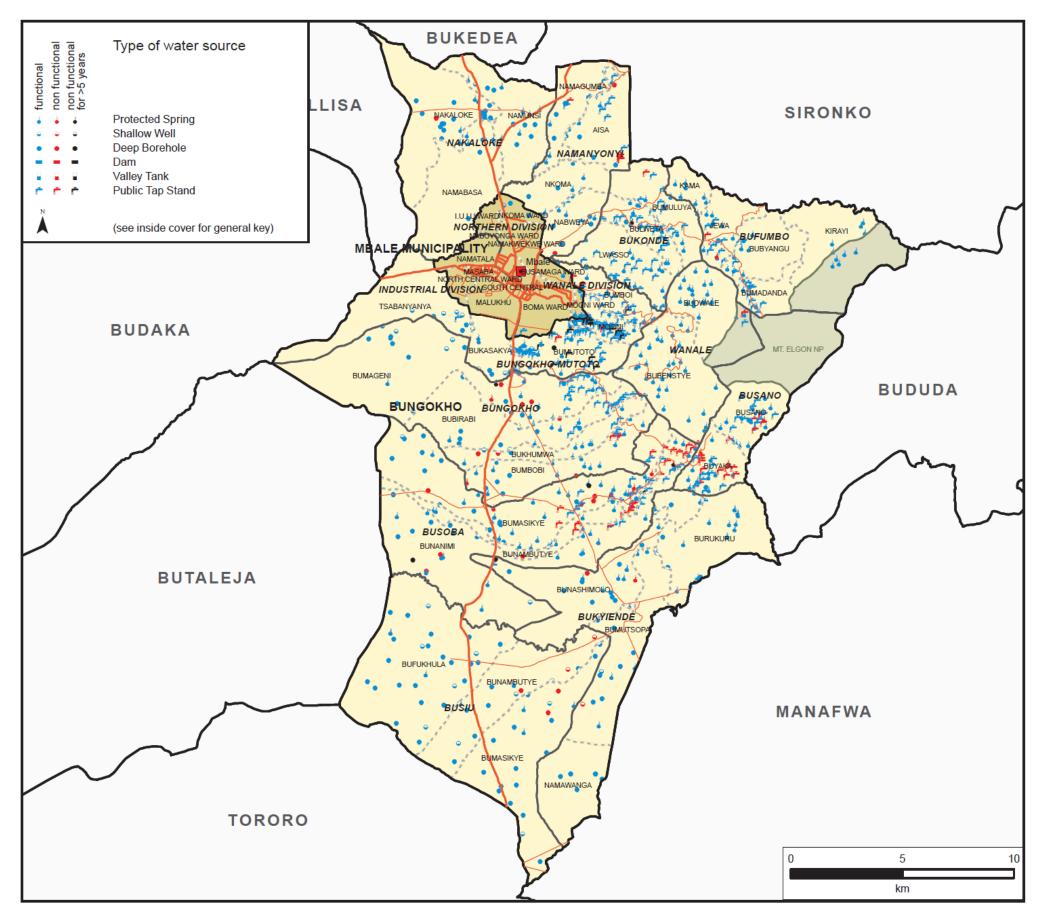


Figure 4.7 Distribution of drinking water sources in Mbale district

## 5 POLICY, LEGAL AND INSTITUTIONAL FRAMEWORK

### 5.1 INTRODUCTION

In Uganda, the key legislation governing an ESIA study includes the National Environmental Act (Cap 153) of the laws of Uganda and the Environmental Impact Assessment Regulations (1998). National Environmental Act established NEMA and entrusts it with the responsibility to ensure compliance with ESIA process and procedures in planning and execution of development projects. The procedures require that a project proponent prepares an EIS with a clear assessment of relevant potential impacts, based on terms of reference (TORs) developed from a scoping exercise. This requires that the ESIA addresses potential direct and indirect socio-environmental impacts during the pre-construction, construction, operation and decommissioning phases together with attendant environmental and social management plan (ESMP).

Policies, legal and institutional framework considered relevant to this proposed project are discussed in this section. Various laws here reviewed relate to minimum acceptable construction operational requirements, environmental quality, land use, public health, occupational safety, labour standards and international legal obligations. The construction and equipping of health faculties ESIA was also be benchmarked against international best-practice standards of the World Bank and WHO.

### 5.2 POLICY FRAMEWORK

## 5.2.1 The National Environment Management Policy, 1994

The overall goal of this policy is the promotion of sustainable economic and social development mindful of the needs of future generations and the EIA is one of the vital tools it considers necessary to ensure environmental quality and resource productivity on a long-term basis. It calls for integration of environmental concerns into development policies, plans and projects at national, district and local levels. Hence, the policy requires that projects or policies likely to have significant adverse ecological or social impacts undertake an EIA before their implementation. This is also reaffirmed in the National Environment Act, Cap 153 which makes EIA a requirement for eligible projects (Third Schedule).

<u>Relation to the project</u>: At the national policy level, environment and development are interrelated and this policy requires that environmental aspects are considered in all development projects such as the proposed health project.

## 5.2.2 The National Medical Equipment Policy, 2009

The objective of the policy is to ensure equipment and furniture are managed economically, efficiently, effectively and sustainably through guided:

- Acquisition of medical equipment and furniture,
- Utilization, regulation and quality assurance of medical equipment and furniture,
- Maintenance of medical equipment and furniture,
- Monitoring and evaluation of performance of medical equipment and furniture and
- Proper disposal of medical equipment and furniture.

<u>Relation to the project:</u> This policy calls for sustainable management of equipment installed at healthcare facilities. Sustainable management entails regular maintenance to reduce breakdown (hence waste) and inefficient energy consumption.

## 5.2.3 The National Health Policy, 1999

The overall objective of health sector policy is to reduce mortality, morbidity and fertility, and the disparities therein. Ensuring access to the minimum health care package is a central strategy to this goal. This project is therefore in line with the strategies of this policy.

## 5.2.4 National Policy on Injection Safety and Health Care Waste Management, 2004

The policy aims at ensuring safe injection practices and proper management of healthcare waste through appropriate procurement, distribution and monitoring of equipment/ supplies and increased awareness.

<u>Relation to the project:</u> One of the key objectives of this policy is to ensure proper healthcare waste management which should be an important environmental sustainability aspect of the proposed project.

### 5.3 LEGAL FRAMEWORK

## 5.3.1 Constitution of the Republic of Uganda, 1995

The 1995 Uganda Constitution provides that every person has a right to own property [Section 26.1] and that no person shall be deprived of property or any interest in or right over property without payment of fair and adequate compensation. The same constitution gives government powers to acquire land (compulsory acquisition) in public interest [Article 273(a)]. The Constitution [Chapter 3, Article 17J] entrusts Government with the duty of ensuring that Ugandans enjoy a healthy environment.

<u>Relation to the project:</u> The constitution is the cardinal law in Uganda upon which all environmental laws and regulations are founded. All environmental impact actions of the project are therefore meant to conform to the broader objectives of the Constitution which requires a health environment for all citizenry.

## 5.3.2 National Environment Act, Cap 153

The National Environment Act (Chapter 153 of Laws of Uganda) establishes and defines functions of NEMA as a body responsible for management, monitoring and supervision of all environmental conservation activities (Section 4). This act provides for various strategies and tools for environment management, which also includes the EIA (Section 19) for projects likely to have significant environmental impacts. The Act also mandates NEMA with a leading role to review environmental impact statements. NEMA sets multimedia environmental standards (Sections 24-32) to prevent contamination of air, water and soil resources. The Act also mandates NEMA with responsibility for insitu and ex-situ conservation of biological fauna and flora resources either on land or in water (Sections 42 and 43). Section 48 empowers NEMA, district environment committees and local environment committees to be responsible for monitoring of local land-use plans, which should be in conformity with national land-use plan. Section 106 outlines provisions to enable compliance with obligations of international environmental conventions. Section 35 entrusts NEMA, lead agencies and local government environment committees with powers to protect the environment from human activities that

could adversely affect it. Section 56 prohibits discharge of hazardous substances, chemicals, oil, etc. into the environment except in accordance with guidelines prescribed by NEMA.

The Act outlines principles of environmental management and rights to a decent environment and also sets out principles for:

- Institutional arrangements;
- Environmental planning;
- Environmental regulations;
- Environmental standards;
- Environmental restoration orders and easements;
- Records, inspection and analysis;
- Financial instruments:
- Offences:
- Judicial proceedings; and
- International obligations.

The Third Schedule of the National Environment Act (Cap 153) does not specifically list healthcare facilities under scheduled projects, nonetheless, two sections thereof related to function or waste management mean that these facilities are not exonerated from the general EIA process. Section 12 on the Schedule requires that projects related to:

- a) Sites solid waste disposal;
- b) Sites for hazardous waste disposal;
- c) Sewage disposal;
- d) Atmospheric emissions;
- e) Offensive odours; should undertake a full EIA.

This Act also formed the basis for enactment of the Environmental Impact Assessment Guidelines, 1997 and Environmental Impact Assessment Regulations, 1998 which together prescribe the EIA process in Uganda. The process is schematically presented in NEMA's Environmental Impact Assessment (EIA) Reference Manual as shown in Figure 5.1.

<u>Relation to the project:</u> The Act is governs and guides environmental management in Uganda. This EIA is prepared to conform to the Act's requirement that projects likely to have significant environmental impact undertake EIA before they are implemented.

## 5.3.3 Local Governments Act, Cap 243

This Act provides for decentralized governance and devolution of central government functions, powers and services to local governments that have own political and administrative set-ups. According to Section 9 of the Act, a local government is the highest political and administrative authority in its area of jurisdiction and shall exercise both legislative and executive powers in accordance with the Constitution.

<u>Relation to the project:</u> The project will be under jurisdiction of Mbale District, which is mandated under the Local Governments Act, Cap 243 to sanction and oversee development projects in the local government. The District Environmental Officer and Municipal Environmental Officer are mandated to inspect and monitor environmental considerations for development projects in their areas of jurisdiction.

## 5.3.4 Public Health Act, Cap 281

The Public Health Act aims at avoiding pollution of environmental resources that support health and livelihoods of communities. It gives local authorities powers (Section 103) to prevent pollution of watercourses in interest of public good.

<u>Relation to the project:</u> This Act relates to disposal of waste from the proposed laboratory in so far as improper handling, disposal of solid waste and effluent some of which will be classified hazardous, could potentially impact the public health.

# 5.3.5 National Environment (Standards for Discharge of Effluent into Water or on Land) Regulations, 1999

Section 6 (2) details maximum permissible limits for 54 regulated contaminants which must not be exceeded before effluent is discharged into water or on land. For this project, this standard is appliance to liquid waste/ sewage disposal from the laboratory.

**Table 5.1:** National discharge standards for selected pollutants

Parameter	National discharge standards		
BOD₅ (mg/l)	50		
Suspended solids (mg/l)	100		
Faecal coliforms	10,000 counts/ 100ml		
Chlorine residual (mg/l)	1 mg/l		
pH	6-8		
Phenols (µg/l)	0.2 mg/l		
Oil and grease (mg/l)	10 mg/l		
Total Phosphorus (mg/l)	10 mg/l		
Temperature	20-35°C		

Source: The National Environment (Standards for Discharge of Effluent into Water or on Land) Regulations, 1999.

Relation to the project: Effluent discharged from the laboratory should conform to these regulations.

#### 5.3.6 National Environment (Noise Standards and Control) Regulations, 2003

Part III Section 8 (1) requires facility operators, to use the best practicable means to ensure that the emission of noise does not exceed the permissible noise levels. The regulations require that persons to be exposed to occupational noise exceeding 85 dBA for eight hours in a day should be provided with requisite ear protection.

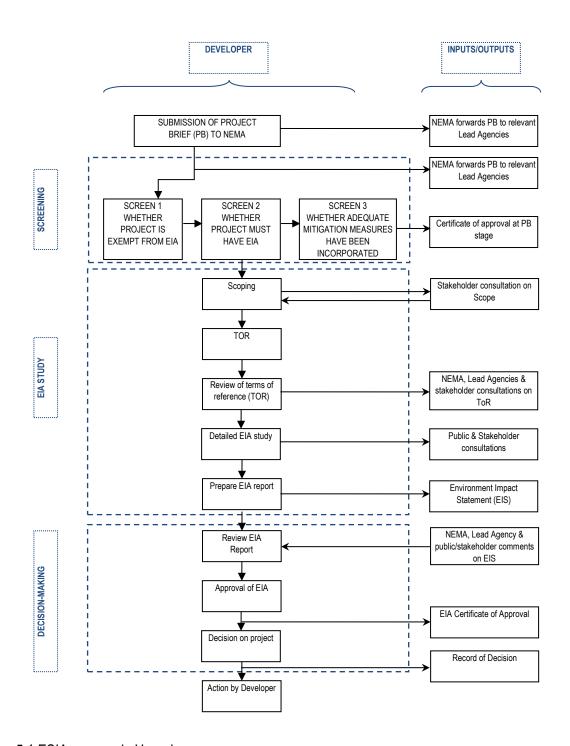


Figure 5.1 ESIA process in Uganda

Table 5.2: Regulatory noise limits

Facility	Noise limits dB (A) (Leq)				
	Day*	Night*			
Construction sites	75	65			
*Time frame: Day 6.00 a.m -10.00 p.m; Night 10.00 p.m 6.00 a.m.					

Source: The National Environment (Noise Standards and Control) Regulations, 2003.

<u>Relation to the project:</u> Both during construction and operation of the laboratory, noise generated should not exceed limits prescribed by these regulations.

## 5.3.7 National Environment (Waste Management) Regulations, 1999

These regulations require waste disposal in a way that would not contaminate water, soil, and air or impact public health.

<u>Relation to the project:</u> These regulations apply to both construction and operation-phase waste which should be managed in a way such as to avoid environmental and public health impact.

## 5.3.8 Draft National Air Quality Standards, 2006

The draft national air quality standards provide the following regulatory limits (Table 5.3).

**Table 5.3:** Uganda's regulatory air quality standards for selected pollutants

Pollutant	Averaging time for ambient air	Standard for ambient air
Carbon dioxide (CO <sub>2</sub> )	8 hour	9.0 ppm
Carbon monoxide (CO)	8 hour	9.0 ppm
Hydrocarbons	24 hour	5 mg m <sup>-3</sup>
Nitrogen oxides (NO <sub>x</sub> )	24 hour	0.10 ppm
	1 year arithmetic mean	
Smoke	Not to exceed 5 minutes in any one	Ringlemann scale No.2 or 40%
	hour	observed at 6m or more
Soot	24 hour	500 μg Nm <sup>-3</sup>
Sulphur dioxide (SO <sub>2</sub> )	24 hour	0.15 ppm
Sulphur trioxide (SO <sub>3</sub> )	24 hour	200 μg Nm <sup>-3</sup>

Note: ppm = parts per million; "N" in  $\mu$ g/Nm-3 connotes normal atmospheric conditions of pressure and temperature (25oC and 1 atmosphere).

<u>Relation to the project:</u> These standards will apply to especially onsite waste incineration during (post-construction) use of the laboratory. Emissions from the incinerator should be within limits prescribed by the regulations.

### 5.3.9 Employment Act, 2006

Employment Act, 2006 repeals Employment Act (Cap 219) enacted in 2000. This Act is the principal legislation that seeks to harmonize relationships between employees and employers, protect workers interests and welfare and safeguard their occupational health and safety through:

- i) Prohibiting forced labour, discrimination and sexual harassment at workplaces (Part II; Part IV).
- ii) Providing for labour inspection by the relevant ministry (Part III).
- iii) Stipulating rights and duties in employment (weekly rest, working hours, annual leave, maternity and paternity leaves, sick pay, etc. (Part VI).
- iv) Continuity of employment (continuous service, seasonal employment, etc (Part VIII).

This Act is relevant to the project both during the construction and operational phase.

<u>Relation to the project:</u> The Act will govern labour type and conditions under which person hired by the project work. It prohibits Child labour (a condition the contractor must comply with) as well as providing guidance on work rights during the post-construction phase.

## 5.3.10 Occupational Safety and Health Act (2006)

The Act replaces the Factories Act (1964). It departs from the original listing of "don'ts" and adopts a scientific approach in which technical measures required for protection of workers are prescribed, hence taking on a "preventive approach". The Act provides for prevention and protection of persons at all workplaces from injuries, diseases, death and damage to property. It covers not just the "factory" (as did the Factories Act) but also any workplace where persons are employed and its provisions extend not just to employees but to any other persons that may be legitimately present in a workplace and are at risk of injury or disease. Employers must protect workers from adverse weather and provide clean and healthy work environment, sanitary conveniences, sanitary and protective gear.

<u>Relation to the project:</u> The Act is applicable relation to protection of the construction workers and health workers (and medical waste collectors) against secondary injuries during execution of their duties or work.

#### 5.4 INSTITUTIONAL FRAMEWORK

#### 5.4.1 National Environmental Management Authority (NEMA)

The National Environmental Act, Cap 153 establishes NEMA as the principal agency responsible for coordination, monitoring and supervision of environmental conservation activities. NEMA is under the Ministry of Water and Environment (MWE) but has a cross-sectoral mandate to oversee the conduct of EIAs through issuance of guidelines, regulations and registration of practitioners. It reviews and approves environmental impact statements in consultation with any relevant lead agencies.

NEMA works with District Environment Officers and local environment committees at local government levels who also undertake inspection, monitoring and enforce compliance on its behalf. In Government ministries, NEMA works with Environmental Liaison Units to ensure incorporation of environmental issues in their activities, policies and programs.

#### Role in the project: NEMA will:

- Review and approve the ESIA report (ESIS)
- Through Mbale District Environment Officer, undertake environmental monitoring during project implementation.

#### 5.4.2 Ministry of Health (MOH)

This project will be executed by MOH which is to undertake policy formulation, quality assurance, coordination, monitoring and evaluation of health service delivery in Uganda.

<u>Role in the project:</u> MOH is the project proponent with obligation to fulfil all environmental requirements for every aspect of the project that could bear socio-environmental impact.

## 5.4.3 Ministry of Gender, Labour & Social Development

This ministry sets policy direction and monitoring functions related to labour, gender and general social development. Its OHS Department in the ministry is responsible for inspection and mentoring of occupational safety in workplaces and this could be during project construction and operation of the laboratory facilities.

<u>Role in the project:</u> The OHS Department in this Ministry will be responsible for undertaking inspections of construction sites to ensure safe working conditions.

### 5.4.4 District Local Administration Structures

The proposed project is within the jurisdiction Mbale District Local Government headed by a Local Council V (LC V) Chairman and Chief Administration Officer (CAO) who are the political head and technical head respectively. Various district offices whose functions would be relevant to the project include offices of Natural Resources/Environment, District Health Inspector, District Planner, Community Development Officer, District Director of Health Services, District Water Officer, Town Council and District Engineer. Equally important are village-level local council administration (LC I and LC III). Leaders at these levels of local administration are closer to residents and therefore important in effective community mobilization, sensitization and dispute resolution given that the laboratory is also going to serve cross-border communities.

<u>Role in the project:</u> Local government structures are important for mobilising support for the project as wells monitoring its social-environmental impacts both during construction and operation phases.

#### 5.5 WORLD BANK GROUP POLICIES AND GUIDELINES

This project has been benchmarked against World Bank Group (WBG) standards since IDA is one of the 5 member organizations of the WBG. These standards, practices or guidelines are discussed below.

## 5.5.1 World Bank Operating Policies

The World Bank requires environmental assessment (EA) of projects proposed for Bank financing to help ensure that they are environmentally sound and sustainable, and thus to improve decision making. Environmental Assessment is one of the 10 environmental and social Safeguard Policies that WBG uses to examine potential environmental risks and benefits associated with Bank lending operations. The Bank's Environmental Assessment policy and procedures are described in Operational Policy/Bank Procedures - OP/BP 4.01. Detailed advice and guidance on the conduct of environmental assessment is provided publicly by the World Bank in its Environmental Sourcebook and updates. During project preparation, the World Bank examines the implications of the proposed project for a series of policies below:

- Environmental Assessment:
- Natural Habitats:
- Forestry;
- Pest Management;
- Cultural Property;

- Indigenous Peoples;
- Involuntary Resettlement;
- Safety of Dams;
- Projects in International Waters; and
- Projects in Disputed Areas.

From the nature of proposed project and the fact that project activities would largely entail construction of new buildings on hospital premises, only policy OP/BP 4.01 would be triggered by this project.

## 5.5.2 WB Guidelines

Under its "General EHS Guidelines (April 30, 2007)", the World Bank has several guidelines shown in Table 5.4, many of which are applicable to various components of the proposed project namely:

- i) Air emissions from onsite waste combustion units ("incinerators")
- ii) Hazardous waste management
- iii) Noise
- iv) Occupational health and safety (against biological and radiological hazards).
- Community health and safety including traffic safety such as during project construction or disease
  prevention (where incinerators emission waft into and affect not only local communities but also
  patients visiting or admitted in hospital including their attendants and the hospital staff).
- vi) Construction and decommissioning.

While most of above WBG guidelines apply to the proposed project in one way or the other, in sections below are discussed four environmental, health and safety (EHS) guidelines, namely:

- i) EHS Guidelines Air Emissions And Ambient Air Quality
- ii) EHS Guidelines Waste Management
- iii) EHS Guidelines Health Care Facilities
- iv) EHS Guidelines Hazardous Materials Management
- v) EHS Guidelines Construction and Decommissioning

## 5.5.2.1 WBG EHS Guidelines: "Air emissions and ambient air quality"

## a) General approach

These guidelines require projects with "significant" sources of air emissions, and potential for significant impacts to ambient air quality to prevent or minimize impacts by ensuring that emissions do not result in pollutant concentrations that reach or exceed relevant ambient quality guidelines and standards by applying national legislated standards (or in their absence, the current WHO Air Quality Guidelines, or other internationally recognized sources). Uganda currently has (draft) national air quality standards applicable to this project, specifically incinerator emissions. The standards, however, make no mention of dioxins which are potent cancer-inducing, expected in incineration emissions.

In these guidelines "significant" refers to sources which can contribute a net emissions increase of one or more of the following pollutants within a given air shed:

Particulate matter of size 10 microns (PM10): 50 tons per year (tpy);

- Oxides of nitrogen (NOx): 500 tpy;
- Sulphur dioxide (SO<sub>2</sub>): 500 tpy; or as established through national legislation;
- Equivalent heat input of 50 MWth or greater.

#### **Table 5.4:** WBG General EHS Guidelines (April 30, 2007)

#### 1. Environmental

- 1.1 Air Emissions and Ambient Air Quality
- 1.2 Energy Conservation
- 1.3 Wastewater and Ambient Water Quality
- 1.4 Water Conservation
- 1.5 Hazardous Materials Management
- 1.6 Waste Management
- 1.7 Noise
- 1.8 Contaminated Land

## 2. Occupational Health and Safety

- 2.1 General Facility Design and Operation
- 2.2 Communication and Training
- 2.3 Physical Hazards
- 2.4 Chemical Hazards
- 2.5 Biological Hazards
- 2.6 Radiological Hazards
- 2.7 Personal Protective Equipment (PPE)
- 2.8 Special Hazard Environments
- 2.9 Monitoring

### 3. Community Health and Safety

- 3.1 Water Quality and Availability
- 3.2 Structural Safety of Project Infrastructure
- 3.3 Life and Fire Safety (L&FS)
- 3.4 Traffic Safety
- 3.5 Transport of Hazardous Materials
- 3.6 Disease Prevention
- 3.7 Emergency Preparedness and Response

#### 4. Construction and Decommissioning

- 4.1 Environment
- 4.2 Occupational Health & Safety
- 4.3 Community Health & Safety

Going by this classification, all onsite incineration units at the laboratory/ hospital facilities are "non-significant" sources since no unit at the facilities had capacity to generate the foregoing levels of air pollutants. Two national documents on healthcare waste indicate that a hospital generates 0.1 kg/bed/day excluding pathological waste.

The fact that onsite incineration units burn small waste volumes and generate low levels of emissions could be the reason such "non-significant" units are not provided with (and probably do not require) emissions control.

It should nonetheless be noted WBG guidelines advise that impact significance of emission of inorganic and organic pollutants should be established on a project-specific basis taking into account toxic and other properties of the pollutant. While emissions from such small combustion units are considered low and, with a sufficiently tall stack, would be easily dispersed in the atmosphere with little health risk, locating incineration units close to dwellings and healthcare buildings poses a risk of downwash and emissions wafting into indoor environment- a paradoxical situation for facilities supposed to heal the sick.

Incineration emissions from healthcare facilities may contain significant amounts of particulate matter, heavy metals, dioxins, furans, sulphur dioxide and hydrochloric acid. Of key concern are dioxins which are potent cancer-inducing compounds.

The temperatures needed to breakdown dioxin are typically not reached when burning waste in open air (200-400°C) causing high dioxin emissions. Dioxin can only be destroyed above 850°C, otherwise it remains in atmosphere emissions or in incineration ash where it can leach into groundwater when rain falls on ash piles.

#### b) Emissions control recommendations

To control emission from small combustion sources, WBG guidelines provide several recommendations but in the context of this project, one factor that can be improved is incinerator stack height. Indeed the guidelines advise that stack height for all point sources of emissions, (whether "significant" or not ) should be designed according to good international industry practice (GIIP) (see Figure 5.2) to avoid high ground-level pollutant concentrations due to downwash, building wakes or eddy effects and to ensure reasonable dispersion to minimize environmental or health impacts. These guidelines also recommend annual stack emission testing for NOx and SO<sub>2</sub>.

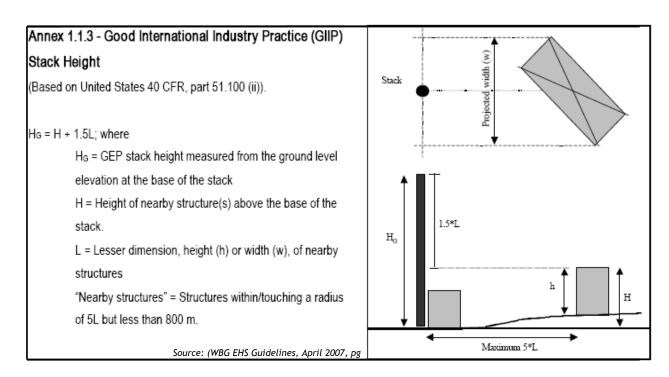


Figure 5.2 Recommended stack design for small combustion sources

## c) Implication for this project

For this project, unless space is a critical limitation, this stack design approach should be adopted wherever incinerators are installed. The guidelines discourage open-burning of solid wastes, whether hazardous or non-hazardous, is not considered good practice and should be avoided, as the generation of polluting emissions from this type of source cannot be controlled.

While small onsite incineration units handling minimal healthcare waste volumes might not require emission control according to these Guidelines, the management including disposal of healthcare waste has become an issue of growing concern in many places in Uganda. Infectious medical waste has been dumped indiscriminately, burned uncontrollably and buried irresponsibly posing considerable public health risk. To abate this impact, government should start to think of a medium-term approach where medical waste is incinerated at centralized (local, regional or national) facilities designed to offer the following social-environmental benefits:

- Total destruction of hazardous constituents (e.g. dioxins only destroyed >850°C).
- Destruction of Infectious Waste.
- Scrub or treat to remove obnoxious gaseous emissions (dioxins, respirable particulates or PM<sub>2.5</sub>, mercury, etc.).
- Assured process control.
- Cost-effective operation.

This approach would necessitate appropriate policy and regulatory framework to induce private sector involvement.

## 5.5.2.2 WBG EHS Guidelines: "Waste management"

### a) General approach

These guidelines apply to both non-hazardous and hazardous waste. They advocate for waste management planning where waste should be characterized according to: composition, source, types, and generation rates. This is essential for laboratory facility comprised in this project since there is a need to segregate the different categories of waste generated both at the laboratory level and overall hospital level.

These guidelines call for implementation of a waste management hierarchy that comprises prevention, recycling/reuse; treatment and disposal. The guidelines require segregation of conventional waste from hazardous waste streams and if generation of hazardous waste cannot be prevented (as is the case at healthcare facilities); its management should focus on prevention of harm to health, safety, and environment, according to the following principles:

- Understanding potential impacts and risks associated with management of any generated hazardous waste during its complete lifecycle.
- Ensuring that people handling, treating and disposing of hazardous waste are reputable and legitimate enterprises, licensed by the relevant regulatory agencies and following good industry practice.
- Ensuring compliance with applicable regulations.

### b) Implication for this project

The laboratory will generate relatively small quantities of (hazardous and non- hazardous) waste and for large generators (for example, the project hospitals), the Guidelines recommend monitoring to include:

- i) Regular visual inspection of all waste storage collection and storage areas for evidence of accidental releases and to verify that wastes are properly labelled and stored.
- ii) Regular audits of waste segregation and collection practices.
- iii) Tracking of waste generation trends by type and amount of waste generated, preferably by facility departments.
- iv) Keeping manifests or other records that document the amount of waste generated and its destination.
- v) Periodic auditing of third party treatment and disposal services including re-use and recycling facilities when significant quantities of hazardous wastes are managed by third parties. Whenever possible, audits should include site visits to the treatment storage and disposal location.

## 5.5.2.3 WBG EHS Guidelines: "facility design"

## a) Applicability

The EHS Guidelines for facility design include information relevant to management of EHS issues associated with laboratories which includes a diverse range of activities involving a referral hospital; inpatient and outpatient facilities.

These guidelines are applicable for planning new laboratory facilities.

### b) Laboratory facility design considerations

These guidelines advise that design and functional layout of laboratory should ensure the following:

- Separation of clean / sterilized and dirty / contaminated materials and people flows;
- Development and inclusion of adequate disinfection / sterilization procedures and facilities;
- Adequate space for the storage of recyclable materials (e.g. cardboard and plastic) for pickup;
- Ventilation systems that provide isolation and protection from airborne infections;
- Design of water systems to provide adequate supplies of potable water to reduce risks of exposure waterborne pathogens;
- Provision of hazardous material and waste storage and handling areas;
- Selection of easily cleaned building materials that do not support microbiological growth, are slip-resistant, non-toxic, and non-allergenic, and do not include volatile organic compound (VOC)-emitting paints and sealants.

### c) Waste management

Waste from laboratory can be divided into two groups:

- General waste similar in composition to domestic waste, generated during administrative, housekeeping, and maintenance functions.
- Specific categories of hazardous healthcare waste (see as detailed in Table 5.5).

Laboratory facilities should establish, operate and maintain a health care waste management system (HWMS) adequate for the scale and type of activities and identified hazards but entailing:

- i) Waste minimization, reuse, and recycling
- ii) Waste segregation at the point of generation,
- iii) On-site handling, collection, transport and storage based on safe practices below;
  - Seal and replace waste bags and containers when they are approximately three quarters full.
     Full bags and containers should be replaced immediately;
  - Identify and label waste bags and containers properly prior to removal;
  - Transport waste to storage areas on designated trolleys / carts, which should be cleaned and disinfected regularly;
  - Waste storage areas should be located within the facility and sized to the quantities of waste generated;
  - Unless refrigerated storage is possible, storage times between generation and treatment of waste should not exceed (in Warm climate) 48 hours during cool season, 24 hours during hot season;
  - Store radioactive waste in containers to limit dispersion, and secure behind lead shields;
  - Packaging containers for sharps should be puncture-proof;

These guidelines recognize incineration as a key source of air emission at healthcare facilities and pollutants emitted from incineration include:

- i) Heavy metals
- ii) Organics in flue gas
- iii) Various organic compounds (dioxins and furans)
- iv) Hydrogen chloride (HCl) and fluorides and potentially other halogens-hydrides (e.g. bromine and iodine)
- v) Typical combustion products such as sulphur oxides (SOx), nitrogen oxides (NOx), volatile organic compounds, monoxide (CO), carbon dioxide (CO<sub>2</sub>), and nitrous oxide (N<sub>2</sub>O).
- vi) Incineration residues such as fly ash and bottom ash may contain high concentrations of persistent organic pollutants (POPs).

For being ineffective in regard to emissions control, these WBG Guidelines caution against use of single-chamber and brick incinerators should be used only as a last resort option.

The Guidelines advise against mixing domestic and hazardous waste. Waste should be segregated at point of generation and non-hazardous waste, such as paper and cardboard, glass, aluminium and plastic, should be collected separately for possible recycling. Food waste should be segregated and composted. Infectious and / or hazardous wastes should be identified and segregated according to its category using a colour-coded system (Table 5.5) which provides good reference information for especially healthcare facility operators). If different types of waste are mixed accidentally, waste should be treated as hazardous.

#### d) Occupational health and safety

Health and safety hazards in healthcare facilities may affect healthcare providers, cleaning and maintenance personnel, and workers involved in waste management handling, treatment and disposal. Typical hazards which should be prevented with proper safety gear and practices include:

- Exposure to infections and diseases (blood-borne pathogens, and other potential infectious materials (OPIM)
- Exposure to hazardous materials / waste
- Fire safety
- Exposure to radiation

Occupational radiation exposure may result from equipment emitting X-rays and gamma rays (e.g. CT scanners), radiotherapy machines, and equipment for nuclear medicine activities. HCF operators should develop a comprehensive plan to control radiation exposure in consultation with the affected workforce. This plan should be refined and revised as soon as practicable on the basis of assessments of actual radiation exposure conditions, and radiation control measures should be designed and implemented accordingly.

**Table 5.5:** Treatment and disposal methods for categories of healthcare waste

Type of waste	Summary of treatment and disposal options / notes
Infectious waste: Includes waste suspected to contain pathogens (e.g. bacteria, viruses, parasites, or fungi) in sufficient concentration or quantity to cause disease in susceptible hosts. Includes pathological and anatomical material (e.g. tissues, organs, body parts, human foetuses, animal carcasses, blood, and other body fluids), clothes, dressings, equipment / instruments, and other items that may have come into contact with infectious materials.	Waste Segregation Strategy: Yellow or red coloured bag / container, marked "infectious" with international infectious symbol. Strong, leak proof plastic bag, or container capable of being autoclaved.  Treatment: Chemical disinfection; Wet thermal treatment; Microwave irradiation; Safe burial on hospital premises; Sanitary landfill; Incineration (Rotary kiln; pyrolytic incinerator; single-chamber incinerator; drum or brick incinerator)  Highly infectious waste, such as cultures from lab work, should be sterilized using wet thermal treatment, such as autoclaving.  Anatomical waste should be treated using Incineration (Rotary kiln; pyrolytic incinerator; single-chamber incinerator; drum or brick incinerator).
Sharps: Includes needles, scalpels, blades, knives, infusion sets, saws, broken glass, and nails etc.	<ul> <li>Waste Segregation Strategy: Yellow or red colour code, marked "Sharps". Rigid, impermeable, puncture-proof container (e.g. steel or hard plastic) with cover. Sharps containers should be placed in a sealed, yellow bag labelled "infectious waste".</li> <li>Treatment: Chemical disinfection; Wet thermal treatment; Microwave irradiation; Encapsulation; Safe burial on hospital premises; Incineration (Rotary kiln; pyrolytic incinerator; single-chamber incinerator; drum or brick incinerator)</li> <li>Following incineration, residues should be landfilled.</li> <li>Sharps disinfected with chlorinated solutions should not be incinerated due to risk of generating POPs.</li> <li>Needles and syringes should undergo mechanical mutilation (e.g. milling or crushing) prior to wet thermal treatment</li> </ul>
Pharmaceutical waste: Includes expired, unused, spoiled, and contaminated pharmaceutical products, drugs, vaccines, and sera that are no longer needed, including containers and other potentially	Waste Segregation Strategy: Brown bag / container. Leak-proof plastic bag or container.  Treatment: Sanitary landfill <sup>a</sup> ; Encapsulation <sup>a</sup> ; Discharge to sewer <sup>a</sup> ; Return expired drugs to supplier; Incineration (Rotary kiln; pyrolytic incinerator <sup>a</sup> ); Safe burial on hospital premises <sup>a</sup> as a last resort.

Type of waste	Summary of treatment and disposal options / notes
contaminated materials (e.g. drug bottles vials, tubing etc.).	<ul> <li>Small quantities: Landfill disposal acceptable, however cytotoxic and narcotic drugs should not be landfilled. Discharge to sewer only for mild, liquid pharmaceuticals, not antibiotics or cytotoxic drugs, and into a large water flow. Incineration acceptable in pyrolytic or rotary kiln incinerators, provided pharmaceuticals do not exceed 1 percent of total waste to avoid hazardous air emissions. Intravenous fluids (e.g. salts, amino acids) should be landfilled or discharged to sewer. Ampoules should be crushed and disposed of with sharps.</li> <li>Large quantities: Incineration at temperatures exceeding 1200 IC. Encapsulation in metal drums. Landfilling not recommended unless encapsulated in metal drums and groundwater contamination risk is minimal.</li> </ul>
Genotoxic / cytotoxic waste:	Waste Segregation Strategy: See above for "infectious waste".
Genotoxic waste may have mutagenic, teratogenic, or carcinogenic properties, and typically arises from the faeces, urine, and vomit of patients receiving cytostatic drugs, and from treatment with chemicals and radioactive materials. Cytotoxic drugs are commonly used in oncology and radiology departments as part of cancer treatments.	<ul> <li>Cytotoxic waste should be labelled "Cytotoxic waste".</li> <li>Treatment: Return expired drugs to supplier; Chemical degradation; Encapsulation<sup>a</sup>; Inertization; Incineration (Rotary kiln, pyrolytic incinerator);</li> <li>Cytotoxic waste should not be landfilled or discharged to sewer systems.</li> <li>Incineration is preferred disposal option. Waste should be returned to supplier where incineration is not an option. Incineration should be undertaken at specific temperatures and time specifications for particular drugs. Most municipal or single chamber incinerators are not adequate for cytotoxic waste</li> </ul>
Chemical waste: Waste may be	disposal. Open burning of waste is not acceptable.  Waste Segregation Strategy: Brown bag / container. Leak-proof
hazardous depending on the toxic, corrosive, flammable, reactive, and genotoxic properties. Chemical waste may be in solid, liquid, or gaseous form and is generated through use of chemicals during diagnostic / experimental work, cleaning, housekeeping, and disinfection. Chemicals typically include formaldehyde, photographic chemicals, halogenated and nonhalogenated solvents, organic chemicals for cleaning / disinfecting, and various inorganic chemicals (e.g. acids and alkalis).	<ul> <li>plastic bag or container resistant to chemical corrosion effects.</li> <li>Treatment: Return unused chemicals to supplier; Encapsulation<sup>a</sup>;</li> <li>Safe burial on hospital premises<sup>a</sup>; Incineration (Pyrolytic incinerator<sup>a</sup>;</li> <li>Facilities should have permits for disposal of general chemical waste (e.g. sugars, amino acids, salts) to sewer systems.</li> <li>Small hazardous quantities: Pyrolytic incineration, encapsulation, or landfilling.</li> <li>Large hazardous quantities: Transported to appropriate facilities for disposal, or returned to the original supplier using shipping arrangements that abide by the Basel Convention. Large quantities of chemical waste should not be encapsulated or landfilled.</li> </ul>
Radioactive waste: Includes solid, liquid, and gaseous materials that have been contaminated with radionuclides. Radioactive waste originates from activities such as organ imaging, tumour localization, radiotherapy, and research / clinical laboratory procedures, among others, and may include glassware, syringes, solutions, and excreta from treated patients.	Waste Segregation Strategy: Lead box, labelled with the radioactive symbol.  Treatment: Radioactive waste should be managed according to national requirements and current guidelines from the International Atomic Energy Agency. IAEA (2003). Management of Waste from the Use of Radioactive Materials in Medicine, Industry and Research. IAEA Draft Safety Guide DS 160, 7 February 2003.

Type of waste	Summary of treatment and disposal options / notes
Waste with high content of heavy metals: Batteries, broken thermometers, blood pressure gauges, (e.g. mercury and cadmium content).	<ul> <li>Waste Segregation Strategy: Waste containing heavy metals should be separated from general health care waste.</li> <li>Treatment: Safe storage site designed for final disposal of hazardous waste.</li> <li>Waste should not be burned, incinerated, or landfilled. Transport to specialized facilities for metal recovery.</li> </ul>
Pressurized containers: Includes containers / cartridges / cylinders for nitrous oxide, ethylene oxide, oxygen, nitrogen, carbon dioxide, compressed air and other gases.	Waste Segregation Strategy: Pressurized containers should be separated from general health care waste.  Treatment: Recycling and reuse; Crushing followed by landfill  Incineration is not an option due to explosion risks  Halogenated agents in liquid form should be disposed of as chemical waste.
General health care waste (including food waste and paper, plastics, cardboard):	Waste Segregation Strategy: Black bag / container. Halogenated plastics such as PVC should be separated from general health care facility waste to avoid disposal through incineration and associated hazardous air emissions from exhaust gases (e.g. hydrochloric acids and dioxins).  Treatment: Disposal as part of domestic waste. Food waste should be segregated and composted. Component wastes (e.g. paper, cardboard, recyclable plastics [PET, PE, PP], glass) should be segregated and sent for recycling where available.

Source: Safe Management of Wastes from Health-Care Activities. International Labour Organization (ILO),

Eds. Pruss, A. Giroult, and P. Rushbrook (1999)

Notes: a. Small quantities only

## 5.5.2.4 Air emission levels for hospital waste incineration facilities

WBG Guidelines advise emission levels of healthcare waste incinerators presented in Table 5.6.

Table 5.6: Air emission levels for hospital waste incineration facilities

Pollutant	Unit	Guideline value
Total Particulate matter (PM)	mg/Nm³	10
Hydrogen Chloride (HCI)	mg/Nm³	10
Total organic carbon (TOC)	mg/Nm <sup>3</sup>	10
Hydrogen Fluoride (HF)	mg/Nm³	1
Sulphur dioxide (SO2)	mg/Nm <sup>3</sup>	50
Carbon Monoxide (CO)	mg/Nm³	50
NOX	mg/Nm <sup>3</sup>	200-400a
Mercury (Hg)	mg/Nm³	0.05
Sb, As, Pb, Cr, Co, Cu, Mn, Ni, and V	mg/Nm <sup>3</sup>	0.05
Polychlorinated dibenzodioxin and dibenzofuran (PCDD/F)	ng/Nm³TEQ	0.1

#### Notes:

a. 200 mg/m³ for new plants or for existing incinerators with a nominal capacity exceeding 6 tonnes per hour; 400 mg/m³ for existing incinerators with a nominal capacity of 6 tonnes per hour or less.

b. Oxygen level for incinerators is 7 percent.

### 5.5.2.5 WBG EHS Guidelines: "Hazardous materials management"

### a) Application and approach

These guidelines apply to projects that use, store, or handle any quantity of hazardous materials (Hazmats), defined as materials that represent a risk to human health, property, or the environment due to their physical or chemical characteristics. Hazmats can be classified according to the hazard as explosives; compressed gases, including toxic or flammable gases; flammable liquids; flammable solids; oxidizing substances; toxic materials; radioactive material; and corrosive substances.

#### b) General hazardous materials management

Facilities which manufacture, handle, use, or store hazardous materials should establish management programs that are commensurate with the potential risks present. The main objectives of projects involving hazardous materials should be the protection of the workforce and the prevention and control of releases and accidents. These objectives should be addressed by integrating prevention and control measures, management actions, and procedures into day-to-day business activities.

## 5.5.2.6 WBG EHS Guidelines: "Construction and decommissioning"

These provide guidance, specific guidance on prevention and control of community health and safety impacts that may occur during new project development or due to expansion or modification of existing facilities. By thematic categories, they address three major aspects (environment, OHS and community health and safety) below.

### a) Environment:

- Noise and vibration: During construction and decommissioning activities, noise and vibration may be caused by the operation of pile drivers, earth moving and excavation equipment, concrete mixers, cranes and the transportation of equipment, materials and people.
- Air quality: Project construction of new buildings that will require materials to be trucked in to the site and this could generate fugitive dust affecting adjoining service areas or communities. A secondary source of emissions may include exhaust from diesel engines of earth moving equipment, as well as from open burning of construction waste on-site.
- **Solid waste:** During project implementation, non-hazardous solid waste generated at construction sites would include, scrap wood, glass cullet and metal.
- Hazardous materials: Asbestos might be encountered where entire buildings will be demolished and rebuilt.

## b) Occupational Health and Safety

Likely OHS risks during construction of the proposed laboratory include over-exertion, slips and falls, work at heights, hot works (welding) and electrocution, being struck by objects, injury by moving machinery and dust from construction activities.

### c) Community Health and Safety:

The guidelines recommend implementation of risk management strategies to protect general community from physical, chemical, or other hazards associated with sites under construction and decommissioning. Key areas to consider are:

- General site hazards: where construction activities can injure people in or near buildings under construction.
- Disease Prevention: ensuring that risk of disease from construction-related activities (e.g. from water ponding).
- Traffic Safety: Construction activities may result in a significant increase in movement of heavy vehicles for the transport of construction materials and equipment increasing the risk of traffic-related accidents and injuries to workers and local/ hospital communities.

### 5.6 COMPARISON OF UGANDA STANDARDS AND WBG REQUIREMENTS

All key principles of the World Bank Operation Policies have been incorporated into the new IFC Performance Standards. There are differences between Uganda's guidelines and those of the WBG, not only about waste management and air quality but also resettlement as outlined in Table 5.7.

## 5.7 WORLD HEALTH ORGANISATION (WHO) GUIDELINES

This project has been benchmarked against World Health Organisation (WHO) guidelines for basic laboratories (WHO, 2004) and low-risk TB laboratories (WHO, 2012) since the project laboratory will be a biosafety level 2 TB laboratory designated to handle samples prone to generate aerosols.

#### 5.8 WHO BIOSAFETY GUIDELINES: "FACILITY DESIGN"

## a) Applicability

The WHO Guidelines for facility design include information relevant to management of Biosafety issues associated with laboratories which includes a diverse range of activities involving a referral hospital; inpatient and outpatient facilities.

Table 5.7: Comparison of Uganda requirements and those of WBG including IFC

Issue	Uganda requirement	IFC	World Bank requirement
Social and Environmental Assessment and Management System	EIA process based on 13 categories listed in the Third Schedule of <i>The National Environment Act (Cap 153)</i> as projects that must have EIA undertaken.	Documentation and processes are driven by risks and impacts, not project categorization.  Goes beyond assessment to address implementation through the use of a social and environmental management system.	Driven by project categorization.  OP 4.01 mostly focuses on assessment only.
Involuntary Resettlement	Ugandan EIA guidelines/ regulations have no specific guidelines on resettlement action plans (RAP) apart from requiring analysis of social impact assessment.	Requires clients to establish a grievance mechanism.	No equivalent requirement in OP 4.01.

Issue	Uganda requirement	IFC World Bank requirement
Healthcare Waste Management	Uganda has no specific environmental guidelines for healthcare sector.	Guidelines exist: (www.ifc.org/ifcext/enviro.nsf/Content/EnvironmentalGuidelines)
Incineration and emissions control	No national standards on design or general performance of incineration facilities.	Detailed guidelines on incineration at healthcare facilities provided in: "Environmental, Health and Safety Guidelines-HEALTHCARE FACILITIES".
	Emissions from incineration facilities expected to comply with national (draft) air quality standards.	World Bank has air quality standards (World Bank Group EHS Guidelines: <i>AIR EMISSIONS AND AMBIENT AIR QUALITY</i> , April 2007) for continuous point source emissions sources.
	Uganda's air quality standards make no mention of dioxins (known carcinogenic or cancer- inducing) compounds from combustion / incineration facilities.	"Environmental, Health and Safety Guidelines-HEALTHCARE FACILITIES detail air emission levels for hospital waste incineration facilities including dioxins.
Air quality standards	Uganda's national air quality standards do not specify size/ capacity of facility they apply to.	WBG Guidelines apply to <b>significant</b> emissions sources which are able to contribute a net emissions increase of one or more of the following pollutants within a given air shed:
		<ul> <li>PM<sub>10</sub>: 50 tons per year (tpy);</li> <li>NOx: 500 tpy;</li> <li>SO<sub>2</sub>: 500 tpy;</li> <li>Combustion sources with an equivalent heat input of 50 MWth or greater.</li> </ul>

### b) Laboratory facility design considerations

These guidelines advise that design and functional layout of laboratory should ensure the following:

- Ample space must be provided for the safe conduct of laboratory work and for cleaning and maintenance.
- Walls, ceilings and floors should be smooth, easy to clean, impermeable to liquids and resistant to the chemicals and disinfectants normally used in the laboratory.
- Floors should be slip-resistant.
- Bench tops should be impervious to water and resistant to disinfectants, acids, alkalis, organic solvents and moderate heat.
- Illumination should be adequate for all activities. Undesirable reflections and glare should be avoided.
- Laboratory furniture should be sturdy. Open spaces between and under benches, cabinets and equipment should be accessible for cleaning.
- Storage space must be adequate to hold supplies for immediate use and thus prevent clutter on bench tops and in aisles. Additional long-term storage space, conveniently located outside the laboratory working areas, should also be provided.
- Space and facilities should be provided for the safe handling and storage of solvents, radioactive materials, and compressed and liquefied gases.
- Facilities for storing outer garments and personal items should be provided outside the laboratory working areas.
- Facilities for eating and drinking and for rest should be provided outside the laboratory working areas.

- Hand-washing basins, with running water if possible, should be provided in each laboratory room, preferably near the exit door.
- Doors should have vision panels, appropriate fire ratings, and preferably be self-closing.
- At Biosafety Level 2, an autoclave or other means of decontamination should be available in appropriate proximity to the laboratory.
- Safety systems should cover fire, electrical emergencies, and emergency shower and eyewash facilities.
- First-aid areas or rooms suitably equipped and readily accessible should be available
- Consideration should be given to the provision of mechanical ventilation systems that provide an inward flow of air without recirculation. If there is no mechanical ventilation, windows should be able to be opened and should be fitted with arthropod-proof screens.
- A dependable supply of good quality water is essential. There should be no crossconnections between sources of laboratory and drinking-water supplies. An anti-backflow device should be fitted to protect the public water system.
- There should be a reliable and adequate electricity supply and emergency lighting to permit safe exit. A stand-by generator is desirable for the support of essential equipment, such as incubators, biological safety cabinets, freezers, etc.
- There should be a reliable and adequate supply of gas. Good maintenance of the installation is mandatory.
- Laboratories are occasionally the targets of vandals. Physical and fire security must be considered. Strong doors, screened windows and restricted issue of keys are compulsory.
   Other measures should be considered and applied, as appropriate, to augment security.

### c) Waste Handling

Waste from laboratory can be divided into five groups:

- 1. Non-contaminated (non-infectious) waste that can be reused or recycled or disposed of as general, "household" waste;
- 2. Contaminated (infectious) "sharps" hypodermic needles, scalpels, knives and broken glass; these should always be collected in puncture-proof containers fitted with covers and treated as infectious:
- 3. Contaminated material for decontamination by autoclaving and thereafter washing and reuse or recycling;
- 4. Contaminated material for autoclaving and disposal; and
- 5. Contaminated material for direct incineration.

In laboratories, decontamination of wastes and their ultimate disposal are closely interrelated. In terms of daily use, few if any contaminated materials will require actual removal from the laboratory or destruction. The overriding principle is that all infectious materials should be decontaminated, autoclaved or incinerated within the laboratory.

Laboratory facilities should establish, operate and maintain a contamination containment system adequate for the scale and type of activities and identified hazards but entailing:

- A system to identify and separate infectious materials and their containers should be adopted. Categories should include:
  - Sharps
  - Contaminated (potentially infectious) materials for autoclaving and reuse
  - Contaminated (potentially infectious) materials for disposal
- Effective decontamination or disinfection of objects or material by an approved procedure.
- Containment of decontamination potential hazard residues prior to disposal.
- Appropriate packaging for immediate on-site incineration or transfer to another facility.

These guidelines recognize breakdown of the pathogen containment as a key source of contamination in laboratory facilities.

### d) Chemical, fire, electrical, radiation and equipment safety

Workers in clinical laboratories are not only exposed to pathogenic microorganisms, but also to chemical, electrical, radiation and fire hazards. In addition, a breakdown in the containment of pathogenic organisms may be the indirect result of chemical, fire, electrical or radiation accidents. It is therefore essential to maintain high standards of chemical, fire, electrical, radiation and equipment safety in any microbiological laboratory.

It is mandatory that Laboratory facilities establish and maintain operation and safety manual adequate for the scale and type of activities but entailing:

- Staff induction and regular training on health and safety;
- Chemical containers clearly labelled and capped;
- Keep records of material safety data sheets or other chemical hazard information from chemical manufacturers and/or suppliers, and made accessible in laboratories where these chemicals are used:
- Only amounts of chemicals necessary for daily use should be stored in the laboratory. Bulk stocks should be kept in specially designated rooms or buildings;
- Avail appropriate spillage charts and displayed in a prominent position in the laboratory;
- Provision of chemical spill kits;
- Compressed gas cylinders and liquefied gas containers securely fixed (for example, chained) to the wall;
- Prominent display of fire warnings, instructions and escape routes in each room and in corridors and hallways:
- Provision of fire-fighting equipment placed near room doors and at strategic points in corridors and hallways: Fire extinguishers should be regularly inspected and maintained, and their shelf-life kept up to date;
- Regular inspection and testing of all electrical installations and equipment, including earthing/ grounding systems;
- Installation of Circuit-breakers and earth-fault-interrupters in appropriate laboratory electrical circuits:
- Earthing/ grounding all laboratory electrical equipment, preferably through three-prong plugs;
- All laboratory electrical equipment and wiring should conform to national electrical safety standards and codes.

## 6 POTENTIAL SOCIO-ENVIRONMENTAL IMPACTS

#### 6.1 INTRODUCTION

In this chapter, prediction and analyses possible positive and negative impacts of construction, equipping and operation of satellite laboratory in Mbale RRH is presented. Since the proposed site for the project is within an already established hospital, most of the socio-environmental impacts associated with this project will be direct in nature and mostly result from construction activities. Impact analysis involved determination of magnitude, extent, duration and significance of potential impacts. A detailed assessment of impacts is presented in sections below.

#### 6.2 CONSTRUCTION-PHASE IMPACTS

### 6.2.1 Positive Impacts

### 6.2.1.1 Income to material/ equipment suppliers and contractors

Development of the project will entail civil works requiring materials such as gravel, bricks, lumber, steel reinforcement and cement. This is a **positive** but **short-term** and **reversible** impact. Considering that construction labour would be local or national but medical equipment procured internationally, this impact has local, national and international spatial extent.

**Enhancement measure**: Earth materials needed for construction, for example, murram, aggregate (stones and sand) are obtained from quarry operations. Conscious or unwitting purchase of these materials from unlicensed operations indirectly promotes environmental degradation at illegal quarry sites and can cause medium- to long-term negative impacts. It should therefore be a contractual obligation for contractors to procure construction materials from quarries legitimately licensed by Mbale District Local Government.

#### 6.2.1.2 Employment

Construction will avail skilled and unskilled job opportunities. This would be a **positive** but **short-term** and **reversible** impact, lasting only during the construction period.

**Enhancement measure**: Wherever feasible, local people should be considered for job opportunities commensurate with their level of skills. Adequate occupational health and safety standards should be provided to ensure the work environment is conducive. Contractors will be encouraged to pay a "living wage" to all workers.

## 6.2.2 Negative Impacts

#### 6.2.2.1 Waste generation (improper construction waste management)

Solid waste will be generated at the site during site preparation and construction phases. The waste may consist of demolition debris including timber or metal cuttings, excavated materials, paper/cement bags, empty paint and solvent containers, broken glass among others. Some of the waste materials such as paints, cement, adhesives and cleaning solvents contain hazardous substances, while some of the waste materials including metal cuttings and plastic containers are not biodegradable and can have *long-term* and *cumulative* effects on the environment. It impacts on the environment through blockage of drainage systems and negative impacts on human health. Other wastes which will be generated by

non-construction activities because of the presence of the workers at the site include food debris, contaminated water from washing, cleaning equipment, construction tools and vehicles.

Inappropriate disposal of construction waste or spoil and domestic waste could have medium or long-term environmental and public health impact. Extent of this impact will be local to areas where waste is dumped or their immediate neighbourhoods.

Likelihood of the impact occurring is high considering that is already a problem of waste management in the hospital. The intensity of the impact will be **medium** given that the waste that will be generated is mostly non-hazardous and could be disposed of at the municipality disposal facility for landfilling. The sensitivity of receptors is rated **low**. Hence significance of the impact is **moderate**.

## Impact significance:

			Sensitivity of receptor			
			Very low	Low	Medium	High
			1	2	3	4
_	Very low	4	1	2	3	4
act	Very low	'	Negligible	Minor	Minor	Minor
impact	Law	•	2	4	6	8
of i	E Low		Minor	Minor	Moderate	Moderate
	Modium	2	3	6	9	12
Intensity	weatum	Medium 3	Minor	Moderate	Moderate	Major
Inte	Lliah	4	4	8	12	16
_	High	4	Minor	Moderate	Major	Major

### Mitigation strategies:

- i) The wastes will be properly segregated and separated to encourage recycling of some useful waste materials, that is, some excavated stone materials and demolition debris of the microbiology laboratory can be used as backfills.
- ii) Hazardous waste will not be mixed with other solid waste generated and should be managed by way of incineration or land-filling.
- iii) Waste will be picked off the site at least once in 24 hours and when temporarily kept on site it will be covered to minimize nuisance odour and vermin.
- iv) The contractor and hospital administration will work together with the Municipal Council to facilitate proper waste handling and disposal from the site. All wastes must be taken to the approved dumpsites.
- v) Hazardous wastes such as paints, cement, adhesives will be managed through a third party contractor certified by NEMA. The contractor and hospital administration will work together to facilitate sound waste handling and disposal from the site.

### 6.2.2.2 Pressure on existing resources

During the construction stage, demand for basic amenities such as water and electricity may put pressure on the existing infrastructure.

Considering the nature of the project, the impact *intensity* shall be *low* and *short term* limited to the construction phase only. The hospital has power backup and it was reported to be stable. The hospital has a water reservoir although it is not big enough to sustain the hospital demand and groundwater

supply system for emergency cases. However, the **sensitivity** on the receptors will be **high** since it hampers with utility supplies to hospital community, thereby giving a **moderate** impact significance.

## Impact significance:

			Sensitivity of receptor					
			Very low	Low	Medium	High		
			1	2	3	4		
	Vorulow	4	1	2	3	4		
impact	Very low	I	Negligible	Minor	Minor	Minor		
E G	Low	Low	Low	2	2	4	6	8
ofi		LOW 2	Minor	Minor	Moderate	Moderate		
	Medium	3	3	6	9	12		
sus	Wedium	,	Minor	Moderate	Moderate	Major		
Intensity	High	4	4	8	12	16		
	nign	4	Minor	Moderate	Major	Major		

### Mitigation strategies:

The contractor should provide separate storage for water to use at the construction. Instead of connecting to the hospital water supply system, the contractor should opt to use water bowsers for supply.

#### 6.2.2.3 Generation of noise and vibrations

Noise will be one of the most undesirable consequences of the construction phase. Relatively high noise levels are expected in the area during construction phase. Considerable levels of noise and vibrations will mainly result from demolition activities of the existing laboratory at the proposed site and use of heavy equipment including excavators, graders and dump trucks during site preparation and construction activities. Though the level of discomfort caused by noise is subjective, the most commonly reported impacts of increased noise levels are interference in oral communication and disturbance in sleep or during resting time, disturbance or discomfort resulting from construction noise cannot be ruled out given that the proposed site is located in the vicinity of other hospital units, the psychiatric ward and T.B ward (Photo 4.1 & Photo 4.2).

Impact receptors include hospital staff, patients in the psychiatric and T.B wards and their attendants. The impact *intensity* will be *medium* if an experienced contractor is contracted to carry out the construction activities. However, *sensitivity* on receptors will be *high* since the proposed site is less than 50 m from the surgical ward and the X-ray laboratory, hence a *major* impact *significance*.



Photo 6.1: Existing microbiology/ T.B laboratory at the proposed project site



Photo 6.2: The T.B ward bordering the proposed project site that may be affected by construction activities.

### Impact significance:

			Sensitivity of receptor					
			Very low	Low	Medium	High		
			1	2	3	4		
	Very low	1	1	2	3	4		
impact	S   very low	v   '	Negligible	Minor	Minor	Minor		
m d m	Low	2	2	4	6	8		
of i	Low	LOW	LOW	2	Minor	Minor	Moderate	Moderate
Ē	Medium	3	3	6	9	12		
sus	Medium	•	Minor	Moderate	Moderate	Major		
Intensity	High	4	4	8	12	16		
		4	Minor	Moderate	Major	Major		

## Mitigation strategies:

- i) Contractor will be careful when selecting equipment to avoid use of old or damaged machinery with high level of noise emissions that would have a negative impact in the environment.
- ii) Contractor will ensure that equipment is properly serviced and efficient.
- iii) Contractors will cordon off construction site with noise absorbing materials, for example, plywood rather than iron sheets.
- iv) Construction workers will be aware of the sensitive nature of workplaces they are operating in and advised to limit verbal noise or other forms of noise. For example, metallic objects or tools can be passed on to a colleague rather than dropping or throwing them with loud bangs.
- v) The contractor shall ensure that noise levels emanating from machinery, vehicles and noisy construction activities are kept at a minimum for the safety, health and protection of people in the nearby buildings.
- vi) Noise and vibration will be minimized at the project site and surrounding areas through sensitization of construction truck drivers to switch off vehicle engines while offloading materials.
- vii) All generators and heavy duty equipment will be insulated or placed in enclosures to minimize disrupting ambient noise levels.

### 6.2.2.4 Disruption of laboratory services

Since laboratory services will continue to be provided, demolition of the microbiology/ T.B laboratory will entail moving equipment from one area or room to another. This may cause temporary disruption in delivery of diagnostic services to patients. Temporary rearrangement of service areas can have the undesirable consequence of slowing down emergency services or cause inability among health workers to efficiently offer necessary services adequately. Some equipment might also get damaged during movement.

The impact *intensity* shall be *medium* given that some equipment is heavy and sensitive to movement. The *sensitivity* on the receptors will be *medium* given that they will continue to access services form another allocated area for the microbiology laboratory though this may result into congestion. This results into *moderate* impact significance.

### Impact significance:

			Sensitivity of receptor			
			Very low 1	Low 2	Medium 3	High 4
act	Very low	1	1 Negligible	2 Minor	3 Minor	4 Minor
of impact	Low	2	2 Minor	4 Minor	6 Moderate	8 Moderate
Intensity (	Medium	3	3 Minor	6 Moderate	9 Moderate	12 Major
Inte	High	4	4 Minor	8 Moderate	12 Major	16 Major

## Mitigation strategies:

- Plan pre-construction activities early to identify suitable rooms or adjoining buildings into which
  patients or service areas can be relocated with minimal inconvenience, especially to patients in the
  cancer ward below the laboratory to be re-modified.
- ii) The microbiology laboratory will be relocated to an area or room that is less congested to minimise spread of T.B to other patients

### 6.2.2.5 Indoor air quality deterioration

Traffic-borne emissions include dust and exhaust fumes. Demolition of the microbiology laboratory will lead to considerable levels of indoor cement dust which can affect workers and patients in the neighbouring wards. Deteriorated indoor air quality would be of critical effect to especially asthmatic construction workers, T.B patients and health workers with either minor or severe health impact depending on level and duration of exposure. The trucks used to transport various building materials from their sources to the project site generate emissions of SO<sub>2</sub>, CO<sub>2</sub>, CO, NO<sub>x</sub> and particulates.

The impact *intensity* will be *medium* when control measures are not instituted and the *sensitivity* on the receptors is *high* resulting in a *major* impact significance.

### Impact significance:

			Sensitivity of receptor					
			Very low	Low	Medium	High		
			1	2	3	4		
	Vorulow	4	1	2	3	4		
act	Very low	very low	I	Negligible	Minor	Minor	Minor	
ᇤ	Very low Low	Low	Low	2	2	4	6	8
of i				LOW		Minor	Minor	Moderate
<u>₹</u>	Medium	3	3	6	9	12		
sus	SUS Medium	Medium 3	Minor	Moderate	Moderate	Major		
Intensity	High	4	4	8	12	16		
	підіі	4	Minor	Moderate	Major	Major		

### Mitigation strategies:

i) Contractors should use dust screens or nets in windows, doorways and ventilators of rooms where demolition or other dusty construction activities are occurring.

- ii) Ensure good housekeeping and clean construction operations where, among other necessary actions, dust should be quickly swept off cement floors and collected in covered containers.
- iii) A senior healthcare administrator or superintendent at the hospital should have authority to inspect and restrain contractors from generating excessive dust within hospital environment.
- iv) To minimize indoor dust, portable extraction systems are recommended but they might not be available among local contractors, or lack of electricity on site might limit their use. Water sprays are not practical and could lead to indoor flooding of surrounding rooms or service areas occupied by patients.
- v) Trucks shall be covered during haulage of construction materials and should be diverted away from sensitive areas of the hospital:
- vi) Construction work should be undertaken by an experienced and duly registered contractor with a verifiable sense of environmental awareness and responsibility.
- vii) Workers will be provided with PPE and the use of PPE shall be enforced.

## 6.2.2.6 Temporary scenic blight

Construction activities will require material, equipment and cordons at the hospital. Since the hospital will remain open for access by public, presence of these activities and materials thereof will cause temporary visual blight at the construction site. Presence of construction activities will alter visual impressions accustomed to.

Duration of visual impact will be **short-term** only lasting through the construction phase. The impact **intensity** will be **very low** considering the dilapidated state of all existing facilities; therefore **sensitivity** on receptors will be **low**, hence **minor** impact significance.

### Impact significance:

			Sensitivity of receptor				
			Very low	Low	Medium	High	
			1	2	3	4	
	Very low	1	1	2	3	4	
impact	very low	OW I	Negligible	Minor	Minor	Minor	
ш	Low	Low 2	2	4	6	8	
of i			Minor	Minor	Moderate	Moderate	
	Medium	3	3	6	9	12	
sus	Wediaiii	3	Minor	Moderate	Moderate	Major	
Intensity	High	4	4	8	12	16	
_		4	Minor	Moderate	Major	Major	

*Mitigation strategy:* The contractor shall ensure minimal footprint of construction activities.

#### 6.2.2.7 Occupational health safety (OHS) Risks for Contractors

Construction activities have potential to pose occupational risks some of which could be life-threatening, for example, fatal falls if workers do not use safety latches when working at heights. Working with high voltage and hot works (welding) pose a risk of electrocution. In addition, falling debris could injure workers if personal protective equipment (PPE) are not provided or properly used. Back injury could occur if workers lift heavy objects using inappropriate body posture. Other potential hazards might be: inadequate lighting during the night working hours or limited level of visibility during rainstorms creating difficulty for staff driving heavy equipment, driving equipment with improper brake

system, lack of concentration while working and exposure to hazardous wastes such as paints, cement, adhesives and cleaning solvents. Duration of the impact will be **short-term** occurring only during the construction phase. Extent of the impact will be **local or national** depending on origin of construction workers.

Uganda and WBG Guidelines require that workers exposed to a noise level greater than 85 dB(A) for a duration of more than 8 hours per day wear hearing protection. Related OHS safeguards are comprised in (Uganda's) *Occupational Safety & Health Act (2006) and Employment Act*, 2006.

The likelihood of the impact occurring will be high considering the usually low level of safety at construction sites in Uganda. Intensity of the impact will be **medium** given that some accidents could be minor and not life threatening while others can be grave leading to permanent disability or loss of life of construction workers. Sensitivity of the receptor is **medium** resulting in a **moderate** impact significance.

## Impact significance:

				Sensitivity of receptor					
			Very low	Low	Medium	High			
			1	2	3	4			
impact	Very low	1	1	2	3	4			
			Negligible	Minor	Minor	Minor			
	Low	2	2	4	6	8			
of i			Minor	Minor	Moderate	Moderate			
	Madium	3	3	6	9	12			
Intensity	Medium		Minor	Moderate	Moderate	Major			
	Lliah		4	8	12	16			
_	High	4	Minor	Moderate	Major	Major			

### Mitigation strategies:

- i) Orient all construction workers on safe work practices and guidelines and ensure that they adhere to them
- ii) Training will be conducted on how to prevent and manage incidences. This will involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences. All workers will fully be aware and mentally prepared for potential emergency.
- iii) Regular drills shall constantly follow on various possible incidences. This will test the response of the involved stakeholders. Such drills will keep them alert and they will become more responsive to in the case of incidences.
- iv) Use signage to warn staff and/ or visitors that are not involved in construction activities of dangerous places.
- v) Strict instructions shall be given for drivers of heavy equipment.
- vi) Supervision of works shall be done regularly to ensure that safety conditions are met while any deviation from safety regulations is immediately reclaimed following the best practices regarding safety at work equipment.
- vii) Communication will be ensured in between workers and drivers of heavy equipment.
- viii) Develop evacuation procedures to handle emergency situations.
- ix) Provide adequate OHS protective gear to construction workers. The guide below shall be useful:

**Hearing** (Over 80 Decibels for 8 hours a day requires hearing protection)

- Ear Muffs: One size fits all, comfortable, less ear infection risk
- Ear Plugs: Small, lightweight, can get dirty and cause infection

Face/Eye (Working with any chemical or using any mechanical equipment)

- Face Shield: Protect face from splashing and particles
- Safety Glasses: Protection from solids (cutting, sanding, grinding)
- Safety Goggles: Protects eyes from splashing

### **Hand** (Use correct gloves for the job)

- Chemical Gloves: (Nitrile, Latex, PVC)
- Gloves for other use: special gloves for cutting, burning, abrasions/ blisters

## Body

Overalls: Can protect against dust, vapours, splashes

#### **Foot Protection**

- If electrical hazard present ensure boots offer protection
- Safety Toe/Steel Toe Boots: Always worn when potential for falling hazards exists
- Water/Chemical Resistant Boots: Use in a spill situation
- Non-slip boots for working on wet/slippery floors.

#### 6.2.2.8 Accidents

The hospital is located in the business district of the municipality with a lot of human activity on the adjoining road at the access gate to the hospital. With an increase in number of heavy vehicles during transportation of construction materials and equipment, there will be an increase of community risk of traffic-related accidents or injuries. Traffic accidents would be a significant social impact and especially likely to involve children, women (who commonly cross roads slower than men), disabled and elderly people, notwithstanding the safety risks created by the falling debris from construction activities.

Hoardings and scaffoldings may cause accidents detrimental to human life if they collapsed.

Duration of the impact will be *short-term* occurring only during the construction phase. Extent of the impact will be *local or regional* depending on origin of construction workers. The likelihood of the impact occurring is *medium* considering the usually low level of road safety caution by drivers and pedestrians in Uganda. The *sensitivity* of receptors is *high* given that some accidents would lead to permanent damage and others loss of life while *the intensity* of the impact is *low* given the relatively high volume of traffic assessing the hospital. Therefore significance of the impact is *moderate*.

### Impact significance:

				Sensitivity of receptor						
			Very low	Very low Low M		High				
act	Very low	1	1 Negligible	2 Minor	3 Minor	4 Minor				
of impact	Low	2	2 Minor	4 Minor	6 Moderate	8 Moderate				
Intensity	Medium	3	3 Minor	6 Moderate	9 Moderate	12 Major				
lnt.	High	4	4 Minor	8 Moderate	12 Major	16 Major				

## Mitigation strategies:

- i) Contractors will adopt best transport safety practices with the goal of preventing traffic accidents and minimizing injuries suffered by project personnel and the public, as follows:
  - Contractors will emphasise safety among all drivers. Specifically they will ensure drivers respect speed limits through trading centres and areas with public institutions;
  - Traffic guides will be positioned at road junction to the hospital to control driver speeds;
  - Safe traffic control measures will be used, including road signs and flag persons to warn of dangerous conditions and children crossings.
- ii) Project will require contractors to regularly maintain vehicles to minimize potentially serious accidents such as those caused by brake failure commonly associated with loaded construction trucks.
- iii) The site shall be fenced and signs put in place with security personnel to stop unauthorised people from accessing the site.
- iv) For falling debris, and hoarding/scaffoldings; clear warning signs will be placed around the construction premise, install interceptors and net traps to divert falling debris, and emphasize (provide) person protective gears to persons in the area.
- v) Warning signs will be provided to warn of falling debris.
- vi) Protective gear shall be provided to workers on site.

#### 6.3 OPERATION PHASE IMPACTS

### 6.3.1 Positive Impacts

### 6.3.1.1 Improved medical surveillance services

The project will positively impact health of Ugandans and the East African region through easing access to diagnostic services for TB and other communicable diseases. It will help to enhance access to diagnostic services for vulnerable groups; improve capacity to provide specialized diagnostic services and conduct drug resistance monitoring; and strengthen laboratory based disease surveillance to provide early warning of public health events.

Enhancement measures: Appropriate staffing with technical/ medical personnel adequately trained in use of newly installed equipment.

### 6.3.1.2 Employment opportunities

Operation of the laboratory will create additional long-term technical and non-technical job opportunities for medical professionals, janitors, etc.

Enhancement measure: Wherever feasible, local qualified people will be considered for job opportunities. Adequate occupational health and safety standards should be provided to ensure the work environment is conducive.

## 6.3.2 Negative Impacts

Negative impacts during operation of the laboratory may arise from:

- i) Improper waste management (including laboratory/medical waste and wastewater discharges);
- ii) Misuse or inability to use installed equipment for improved service delivery;
- iii) Lack of maintenance, hence laboratory facilities degenerating to decay again;
- iv) Safety and occupational risk to health workers; and
- v) Risk of fire outbreak
- vi) Emissions from the incinerator.
- vii) Theft of laboratory equipment
- viii) Theft and misuse of laboratory reagents, especially highly concentrated acids known to be used in vengeful attacks on people in Uganda

These are discussed in sections below.

### 6.3.2.1 Improper management of waste

As a result of the operation of this laboratory it is expected that some waste is generated. Mainly there will be *domestic waste and hazardous waste*. Since laboratory activities involve certain medical examinations and also there will be a need for usage of different sorts of chemicals or reagents, it can be concluded that different types of hazardous wastes shall be generated. Therefore, improper waste decontamination and disposal can cause public health risks due to environmental pollution: impaired air quality, stormwater contamination of water courses and infections when people or children rummage through improperly dumped infectious waste or raw waste stockpiles can be life-threatening.

The World Health Organization (WHO) classifies as infectious waste: sharps (needles, scalpels, etc.), laboratory cultures and stocks, blood and blood products, pathological wastes, and wastes generated from patients in isolation because they are known to have infectious diseases. Medical wastes can also include chemicals and other hazardous materials used in patient diagnosis and treatment. These constitute a grave risk, if they are not properly treated or disposed or are allowed to get mixed with other municipal waste. Examples of the types of bio-medical waste expected to be generated from the laboratory during the operational stage are indicated in Table 6.2.

**Table 6.1:** Expected waste from the laboratory

Type of waste	Waste description
Infectious solid	Items contaminated with blood and body fluids,
waste	including cotton, pathological wastes, infected blood, patient samples and specimens
Microbiology	Cultures; stocks and microorganisms; dishes and devices used for culture
Waste	
Sharps	Needles; syringes; scalpels; blades; glass, etc
Disposables	Disposables other than sharps, e.g. Gloves, valves, and any other infected plastics
Liquid Waste	Waste generated in the laboratories
Chemical Waste	Chemicals used in the production of biological, laboratory reagents; film developer; disinfectants that are expired or no longer needed; solvents; outdated, contaminated and discarded chemicals
Incineration Ash	Ash from the incineration of any biomedical waste

Likelihood of the impact occurring is high given that there is no proper hazardous waste management system in place and the incinerator that was installed is reported to be inadequate for the volumes of medical waste generated in the hospital. It is a long-term impact, local and cumulative in nature hence the *intensity* of the impact will also be *high*. The *sensitivity* of receptors (for example, T.B patients) due to improper medical waste management is *high*, thereby giving a *major* impact significance.

#### Impact significance:

			Sensitivity of receptor						
			Very low	Low	Medium	High			
			1	2	3	4			
	Vorulow	4	1	2	3	4			
impact	Very low	1	Negligible	Minor	Minor	Minor			
l d	Low	2	2	4	6	8			
ofi			Minor	Minor	Moderate	Moderate			
ΞĘ	Medium	3	3	6	9	12			
Sus	Wiedium		Minor	Moderate	Moderate	Major			
Intensity	High		4	8	12	16			
	High	4	Minor	Moderate	Major	Major			

### Mitigation strategies:

- i) Wastewater discharged from laboratory shall be aggregated and eventually pre-treated prior being discharged into the sewerage system.
- ii) Appropriate waste bins will be provided for the different types of waste generated in the laboratory to allow segregation and collection at the point of generation.
- iii) Waste shall be collected from site at least once in 24 hours, and it shall be done in such a way to minimize nuisance odours, vermin and dust
- iv) Hospital/ Laboratory staff shall be trained or educated on the importance and means of waste management and handling during operation.
- v) The hospital administration shall work together with a private refuse handlers and the Municipal Council to facilitate sound waste handling and disposal from the site noting that hazardous waste must not be mixed with municipal waste.

vi) The laboratory will ensure proper waste management practices as recommended in the study on improvement of healthcare waste management in Uganda<sup>1</sup>.

### 6.3.2.2 Air pollution

At occasions when the incinerator installed is inadequate, open burning of waste may be carried out. This will result in emissions to the air including odour, particulate matter, hydrogen chloride, nitrogen oxides, sulphur dioxide, carbon monoxide, and volatile organic compounds (from methane to polycyclic aromatic hydrocarbons (PAH), dioxins and furans (PCDD/F) Dioxins are known to promote cancers in humans. In addition, downwash of incinerator emissions has potential to degrade indoor air quality for buildings.

Duration of onsite and offsite air pollution would be short-term if an additional incinerator is put in place to handle the extra waste and would also be *long-term* from downwash of emissions of the incinerator lasting entire life of incineration units. The *intensity* of the impact will be *medium* if incinerator stacks design proposed in WBG EHS Guidelines: "Air emissions and ambient air quality" is adopted. However, *sensitivity* of health of patients and nearby communities to potential air pollution is *high*, thereby giving a *major* impact significance.

## Impact significance:

				Sensitivity of receptor					
			Very low 1	Low 2		High 4			
act	Very low	1	1 Negligible	2 Minor	3 Minor	4 Minor			
of impact	Low	2	2 Minor	4 Minor	6 Moderate	8 Moderate			
Intensity	Medium	3	3 Minor	6 Moderate	9 Moderate	12 Major			
Inte	High	4	4 Minor	8 Moderate	12 Major	16 Major			

### Mitigation strategies:

- i) The laboratory will ensure that operator of incineration unit is properly trained;
- ii) The incinerator shall be operated at its design temperatures and combustion air supply;
- iii) The laboratory will be equipped with bio-safety areas and have a ventilation system that fulfils standards of biosafety;
- iv) Adequate fuel should be provided so that waste is incinerated immediately upon generation to avoid unnecessary accumulation to render the unit inadequate; and
- v) All exhaust air from the laboratory shall pass through high efficiency particulate air filters.

## 6.3.2.3 Occupational health and safety risks

Inadequate treatment or handling of contaminated samples or waste can have potential to expose laboratory staff to risk of transmission of life threatening infections at work. This transmission can take place through equipment, clothing and vehicles transporting samples. The infectious waste could be in gaseous, liquid or solid forms. A list of OHS risk sources for staff is presented below:

<sup>&</sup>lt;sup>1</sup> MOH 2005 (revised march 2009): Improvement of healthcare waste management in Uganda (conducted by Carl Bro)

- i) Inadequate lighting and ventilation in workplaces
- ii) Lack of safe access particularly for disabled employees
- iii) Lack of adequate training (or neglect of safety precautions/ guidelines) in use of equipment and handling of samples
- iv) Misuse of equipment and materials for functions they are not designed
- v) Lack of safety signage in specific areas
- vi) Electrical hazard
- vii) Eye hazards such as splashes
- viii) Chemical hazards (acids, alkalis, expired drugs, oxidizing and reactive chemicals)
- ix) Biological hazards (samples of blood or other body fluids with potential to cause diseases). Biological agents can be classified into four groups<sup>2</sup>:
  - 1: Biological agents unlikely to cause human disease;
  - 2: Biological agents that can cause human disease and are likely to require additional controls, but are unlikely to spread to the community;
  - **3**: Biological agents that can cause severe human disease, present a serious hazard to workers, and may present a risk of spreading to the community, for which there usually is effective prophylaxis or treatment available and are thereby likely to require extensive additional controls;
  - **4:** Biological agents that can cause severe human disease, are a serious hazard to workers, and present a high risk of spreading to the community, for which there is usually no effective prophylaxis or treatment available.

Duration of the impact would be *long-term* lasting entire life of the affected person or short-term depending of the hazard exposed to. The intensity of the impact is *low* if "facility design" proposed in WBG EHS Guidelines is adopted and PPE used by workers. However, *sensitivity* on the receptors will be *high*, thereby giving a *moderate* impact *significance*.

### Impact significance:

				Sensitivity of receptor					
			Very low	Low	Medium	High			
			1	2	3	4			
	Very low	1	1	2	3	4			
impact	very low		Negligible	Minor	Minor	Minor			
	Low	2	2	4	6	8			
of:			Minor	Minor	Moderate	Moderate			
<u> </u>	Medium	3	3	6	9	12			
Sus	weatum		Minor	Moderate	Moderate	Major			
Intensity	High	4	4	8	12	16			
	High	4	Minor	Moderate	Major	Major			

### Mitigation strategies:

i) The primary measure to mitigate OHS impacts is prevention which entails identification of risks and instituting pro-active measures to avoid them. In part this can be achieved by following GIIP or national guidelines. For unavoidable risks, personal protective equipment (PPE) should be provided to workers.

 $<sup>^2</sup>$  World Health Organization (WHO) Classification of Infective Microorganisms by Risk Group (2004).

- ii) Orient all staff on safe work practices and guidelines and ensure that they adhere to them.
- iii) Training staff on how to prevent and manage incidences. This should involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences.
- iv) Regular safety drills to constantly follow on various possible incidences.
- v) Use signage to warn staff and/ or visitors that are not involved in laboratory work of dangerous places.
- vi) Develop evacuation procedures to handle emergency situations.
- vii) Provide adequate OHS protective gear for all laboratory staff.

#### 6.3.2.4 Risk of fire outbreak

Without provisions for fire safety, there is a risk of fire outbreak in the laboratory with disastrous life and financial impact. Fires can start from ignitable materials in laboratories, cigarette smoking in non-designated places or old electrical connections.

Duration of the impact would be *long-term* lasting entire life of laboratory operation phase, local in spatial extent affecting onsite facilities, patients, health workers and neighbouring communities with possibly irreversible and the likelihood of the impact occurring and its intensity are *low* if "facility design" (see section 5.5) proposed in WBG EHS Guidelines and WHO "facility design" (see section 5.5) are adopted. However, *sensitivity* on the receptors will be *medium*, thereby giving a *moderate* impact *significance*.

### Impact significance:

				Sensitivity of receptor						
			Very low	Low	Medium	High				
ಕ	Very low	1	1 Negligible	2 Minor	3 Minor	4 Minor				
of impact	Low	2	2 Minor	4 Minor	6 Moderate	8 Moderate				
Intensity o	Medium	3	3 Minor	6 Moderate	9 Moderate	12 Major				
Inte	High	4	4 Minor	8 Moderate	12 Major	16 Major				

### Mitigation strategies:

- i) Fire extinguishers to be provided at strategic locations within the laboratory and ensure that all fire-fighting equipment are regularly maintained and serviced.
- ii) Key healthcare staff shall have training in fire control through regular firefighting drills.
- iii) Fire emergency telephone numbers shall be displayed in communal areas.
- iv) Automatic fire alarm system for the entire laboratory will be installed and water hose reels installed in the laboratory.
- v) Fire hazard signs such as 'No Smoking' signs will be provided. Directions to exit in case of any fire incidence and emergency contact numbers shall be provided. The contact/emergency numbers shall be displayed within the laboratory.

## 7 KEY STAKEHOLDER VIEWS

Stakeholders consulted had the following views, some of which were utilised in above impact identification and analysis.

- i) Epidemic preparedness of the existing laboratory is poor and the existing equipment is inadequate hence the project is timely.
- ii) Although the laboratory waste is supposed to be decontaminated before disposal, sometimes the disinfection chemicals in the area are inadequate
- iii) There is no incinerator on the hospital premises. The hospital just received a new incinerator but the weight per cycle (25kg) is considered too small to handle the capacity of the hospital waste
- iv) The laboratory centre covers 14 districts. Specimens from outbreaks from these districts are brought to the centre. These outbreaks are common in the rainy seasons but the laboratory capacity is not enough to handle all these specimens
- v) There is a preference for natural light in the labs due to the unreliability of grid electricity in the area. The hospital might use diesel generator in case of power shortages but fuel prices are high. These fluctuations affect laboratory equipment
- vi) The transportation of samples from the areas of outbreaks has been challenging and facilitating medical personnel in the area to transport samples is a challenge
- vii) Hospitals lack adequate PPE to handle epidemic outbreaks and handling of specimens
- viii) Lack of training for medical personnel and the willingness of communities to allow sampling on corpses is low
- ix) Acute shortage of water in the area makes laboratory processes difficult to conduct and record tracking of laboratory data is still a challenge. The design plans should include a factor of water harvesting due to the issue of water scarcity in the area
- x) Though the municipality has a compost waste facility which does not receive hazardous/ medical waste. However, a skip was provided to the hospital for domestic waste collection. The Ministry of health has waste management policy that needs to be renewed
- xi) The designs of the laboratory need to comply with the Physical Planning Act
- xii) To avoid immigration of workers for the construction process, local labour should take 1st priority
- xiii) The contractor should consider the nature of building materials used because local building materials might not be conducive for the designs
- xiv) The contractor needs to take into account the use of firewood for brick making because the demand for firewood is high and this could cause adverse effects to the environment
- xv) The contractor should put up signage to manage traffic especially at the entry gate of the site during construction phase
- xvi) Demolition of the microbiology lab will form debris hence waste management issues arise. The contractor should consider depositing, levelling and compacting the mortar on the roads as waste handling management technique. The contractor should agree with the municipality before any mortar can be deposited on the roads.
- xvii) A licensed contractor should be commissioned to transport the debris from the construction site. Rules and regulations need to be adhered to hence some kind of monitoring plan should be put in place
- xviii) The structure layout should be examined as it determines runoff and erosion

# 8 ENVIRONMENTAL-SOCIO MANAGEMENT PLAN (ESMP)

This environmental-socio management plan, ESMP (Table 8.1) for proposed construction works and operation of laboratory facility, identifies potential environmental and social aspects that should be monitored. It identifies parties responsible for monitoring actions, associated costs, indicators and training or capacity building needs and reporting. Various aspects of the ESMP are detailed in sections below

#### 8.1 INSTITUTIONAL ARRANGEMENTS

### a) Institutional structure and responsibilities

Institutional responsibility of implementing this ESMP will rest with the Project Coordination Unit, PCU (or Task Team) at MOH. A key role of the unit would be among others, to review consultants' reports for compliance with the ESMP. Other roles will be:

- Monitoring implementation of mitigation actions by contractors
- Coordinating training and capacity building where planned
- Periodically report to IDA about implementation of the ESMP

The Project Coordination Unit is led by a Project Coordinator (PC), assisted by a Deputy Project Coordinator (DPC) under whom are 9 Component Coordinators (CC) each for areas such as Human Resource, Health Infrastructure, Leadership & Management, etc. Under CCs are 11 Focal Persons (FP) who have supervisory roles and are responsible for collecting information about respective components. Supervision of implementing this ESMP will under the Health Infrastructure component by the "Senior Engineer-Sanitary" in the Environmental Health Division.

MOH should ensure that all its personnel to be involved in implementation of this ESMP are adequately qualified and were appointed based on their qualification and suitability for respective roles. There is thus no training provided for them under this ESMP.

Oversight to ensure mitigation actions are implemented will rest with the <u>Health Infrastructure Division</u> (HID) at Ministry of Health but health workers at facility level, Project Coordination Unit, In-charge Officials of each facilities and Clerk of Works will have similar responsibility.

MOH shall require contractors to comply with this ESMP and where a contractor has an Environmental Officer she/he will undertake environmental supervision during construction. However, since construction duration is short (1 year) where a contactor does not have an Environmental Officer the supervising engineer or site manager/ contract manager should be given environmental orientation relevant to this ESMP so as to execute required environmental supervision roles. This might not be necessary if the supervising engineer has working environmental knowledge (most civil engineers do). Additionally a "Clerk of Works" should be employed to represent client's environmental objectives and interests during construction phase. As a hiring criterion, such a person should have a background in environmental issues, particularly associated with construction projects.

In each District is found a District Environmental officer (DEO) responsible for overseeing environmental protection on behalf of NEMA. However in town councils and municipalities, this role is undertaken by Town- and Municipal Environmental Officers respectively. These will have implementation and monitoring roles during execution of this ESMP. Usually, these officials lack adequate facilitation so the project will need to provide auxiliary financial assistance for them to have effective participation in this project. This has been provided in the ESMP (Sec 6.2.2.5).

### b) Monitoring and reporting arrangements

Monitoring will verify if predicted impacts have actually occurred and check that mitigation actions recommended in the ESIA are implemented and their effectiveness. Monitoring will also identify any unforeseen impacts that might arise from project implementation.

Who monitors and how: Monitoring will be undertaken by MOH (PCU) and Environmental Officers who represent NEMA at local administrative. Monitoring by NEMA in this case can be considered "third party monitoring" but this is its regulatory mandate according to Sections 6 and 7 of the National Environment Act (Cap 135).

Another government agency that may undertake "third party monitoring" is the Occupational Health & Safety Department in Ministry of Gender, Labour & Social Development (MGLSD). This unit has authority to inspect any facility for compliance with national requirements on safety in workplaces. The project shall make no funding to MGLSD since this is provided for in its annual budget.

Monitoring will be done through site inspection, review of grievances logged by stakeholders and *ad hoc* discussions with potentially affected persons (construction workers, residents near the hospital, patients and healthcare staff). At each monitoring, a discussion with a chairperson of environment committee of the area's local council (LC) could provide insight into views and grievances community has about the project.

Frequency: Monitoring will be undertaken monthly over the 1 year construction period.

**Audits:** Audits will be necessary both during construction and project operation. While construction audits will aim to verify compliance to impact mitigation requirements, post-construction audits are a regulatory requirement within 12 months and not more than 36 months after completion of construction, according to national EIA Regulations, 1998 Section 31(2).

Since construction duration is estimated to be 1 year, this ESMP has included a budget for  $\underline{1}$  <u>year's</u> <u>construction audit</u> and a separate provision so that from year 2 to 5<sup>th</sup> (4 audits) audits done are a full environmental audits as per Uganda requirements.

Both construction and post-construction audits can be conducted internally (by MOH) or by a consultant hired by MOH. If undertaken by a hired consultant, a budget has been proposed for both in this ESMP.

**Reporting:** Concise monthly monitoring reports should be compiled by MOH's Project Coordination Unit (PCU) and shared with IDA or other interested stakeholder.

Construction- and post-construction phase auditing should culminate in reports that MOH shall share with IDA, NEMA or other interested stakeholders. Note that while MOH is under no obligation to disclose construction phase audits, annual post-construction audits must be submitted to NEMA as a regulatory requirement as per Section 31(2) of National EIA Regulations, 1998.

### 8.2 GRIEVANCE MECHANISM

This section describes avenues for affected persons to lodge a complaint or express a grievance against the project, its staff or contractors during project implementation. It also describes the procedures, roles and responsibilities for addressing grievances and resolving disputes. Every aggrieved person shall be able to trigger this mechanism to quickly resolve their complaints.

The objectives of the grievance process are:

- i) Ensure that appropriate and mutually acceptable corrective actions are identified and implemented to address complaints;
- ii) Verify that complaints are satisfied with outcomes of corrective actions;
- iii) Avoid the need to resort to judicial proceedings.

The grievance mechanism at each healthcare facility will be fed from three main sources:

- Community residents, patients or health workers.
- Supervising engineer, clerk of works or contractor.
- Monitoring team who will forward issues/concerns identified in the field.

Steps of the grievance process are described below. A flow chart outlining the main actions and decision points is shown in Figure 8.1.

#### Step 1: Receipt of complaint

A verbal or in written complaint from a complainant will be received by the Clerk of Works and recorded in a complaints log s(he) keeps on site. The log will indicate grievances, date lodged, action taken to address complaint or reasons the grievance was not acted on; information provided to complainant and date the grievance was closed. Grievances should be lodged at any time, either directly to the Clerk of Works' office or through the Local Council Chairperson. The process for lodging a complaint is outlined below:

- i) Clerk of Works receives complaint(s) from complainant and records it in log (in English).
- ii) Clerk of Works reads the recorded complaint translating it into local language for the complainant to confirm correct detail of complaint has been documented.
- iii) Complainant signs the log to confirm grievance was accurately recorded.

### Step 2: Determination of corrective action

If in his/her view, a grievance can be solved at this stage, the Clerk of Works will determine a corrective action in consultation with the aggrieved person. Remedial action(s) and timeframe within which they must be accomplished has been described and the party responsible for implementing them will be recorded in the complaint log.

Grievances will be resolved and status reported back to complainants within 5 days. If more time is required this will be communicated clearly and in advance to the aggrieved person. For cases that are not resolved within the stipulated time, detailed investigations will be undertaken and results discussed not more than 1 month from lodging a grievance.

### Step 3: Meeting with the complainant

The proposed corrective action and the timeframe in which it is to be implemented will be discussed with the complainant within 5 days of receipt of the grievance. Consent to proceed with the corrective action will be sought from the complainant and witnessed by a local council chairperson (LC Chairman).

#### Step 4: Implementation of corrective action

Agreed corrective action will be undertaken by the project or its contractor within the agreed timeframe. The date of the completed action will be recorded in the log against the complainant's grievance.

#### Step 5: Verification of corrective action

To verify satisfaction, the aggrieved person will be asked to return if not satisfied with the corrective action.

#### Step 6: Action by MOH and project contractors

If the Clerk of Works cannot solve the grievance, he will refer it to MOH (and contractor) through the Supervising Engineer. It is believed all possible grievances can be solved at this level.

The grievance process to be followed is depicted in Figure 8.1.

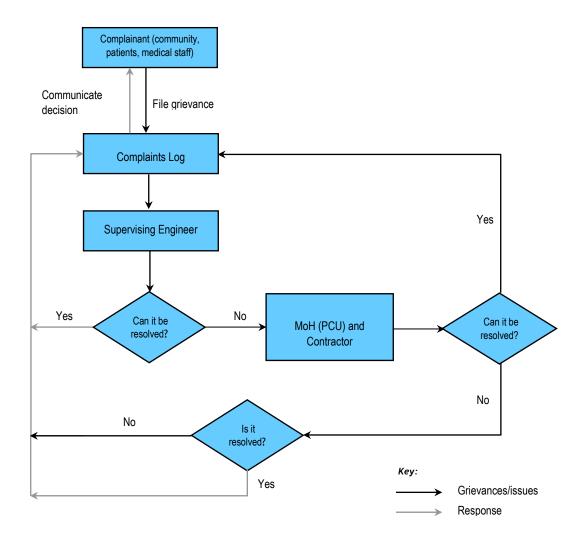


Figure 8.1 Grievance management mechanism

 Table 8.1: Impact Monitoring & Management Plan.

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements			
6.2	CONSTRUCTION PHASE									
6.2.1	Positive impact									
6.2.1.1	Income to equipment ad material suppliers									
	Project will promote local procurement where technically or commercially reasonable and feasible.	Ensure that local communities and businesses benefit from procurement process	Number of local businesses benefiting from construction related procurement	Before and during commencement of construction	MOH; Contractor	Negligible	None			
	For earth materials, procure from legitimate sources to avoid encouraging environmental degradation	Project's material demand does not encourage environmental degradation	All quarries from which materials (sand, stone) are obtained are licensed by the local authorities.	Before and during construction	MOH; Contractor	Negligible	None			
6.2.1.2	Employment				•					
	Contractor will avail local communities with information leaflets in their local languages to create awareness about the proposed project activities	The participation of local community members in all project activities possible.	Local community awareness of project progress status	Before and during construction	MOH; Contractor	Negligible	None			
	Unskilled labour will be recruited exclusively from local community, and semiskilled labour will be recruited preferentially from such communities, provided that they have the requisite qualification, competence and desired experience.	The participation of local community members will be maximised during site preparation and construction activities.	Number of local people (unskilled and semi-skilled) employed during construction phase	Before and during construction	MOH; Contractor	Negligible	None			
	Contractors will be encouraged to pay a "living wage" to all workers.	Improve livelihood of the local community	No complaints of poor remuneration	Before and during construction	MOH; Contractor	Negligible	None			
6.2.2	Negative impacts			-	-	-				
6.2.2.1	Improper construction Was									
	The wastes will be properly	Contractor has records of	No report of illegal waste dumping	Throughout	MOH;	Negligible	None			

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	segregated and separated to encourage recycling of some useful waste materials, that is, some excavated stone materials and demolition	proper waste disposal indicating quantities dumped and location of dumping site	in non-designated areas	construction	Contractor; Local Environmental Officer.		
	debris of the microbiology laboratory can be used as backfills.	Amount of waste disposed minimized by reuse, wherever feasible	Record of material types and estimated quantity diverted for reuse				
	The contractor and hospital administration will work together with the Municipal Council to facilitate proper waste handling and disposal from the site. All wastes must be taken to the approved dumpsites.						
	Hazardous waste will not be mixed with other solid waste generated and should be managed by way of incineration or land-filling. Waste will be picked off the site at least once in 24 hours and when temporarily kept on site it will be covered to minimize nuisance odour and vermin.	Hazardous waste separated from non-hazardous waste on site and each waste stream disposed of according to NEMA requirements in designated sites.	Separate containers for hazardous waste and non-hazardous waste on site	Throughout construction	MOH; Contractor; Local Environmental Officer.	Negligible	Likely hazardous and non-hazardous construction waste
	Hazardous wastes such as paints, cement, adhesives will be managed through a third party contractor certified by NEMA. The contractor and hospital administration will work together to facilitate sound	Hazardous waste separated from non-hazardous waste on site and each waste stream disposed of according to NEMA requirements in designated sites.	Separate containers for hazardous waste and non-hazardous waste on site	Throughout construction	MOH; Contractor; Local Environmental Officer.	Negligible	Likely hazardous and non-hazardous construction waste

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	waste handling and disposal from the site.						
6.2.2.2	Pressure on infrastructure The contractor should provide separate storage for water to use at the construction. Instead of connecting to the hospital water supply system, the contractor should opt to use	Uninterrupted water supplies to hospital community	No complaint of irregularities in water supply related to construction activities	Throughout construction	MOH; Contractor	Negligible	None
6.2.2.3	water bowsers for supply.  Generation of noise and vik	l prations					
	Construction workers will be aware of the sensitive nature of workplaces they are operating in and advised to limit verbal noise or other forms of noise. For example, metallic objects or tools can be passed on to a colleague rather than dropping or throwing them with loud bangs.	No excessive noise from	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	Contractor will be careful when selecting equipment to avoid use of old or damaged machinery with high level of noise emissions that would have a negative impact in the environment.	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	All generators and heavy duty equipment will be insulated or placed in enclosures to minimize disrupting ambient noise	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	levels.						
	Contractor will ensure that equipment is properly maintained and fully functional.	Construction activities generate permissible levels of noise.	complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	Contractors should cordon off areas under construction with noise absorbing materials, for example, plywood rather than iron sheets;	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Comprised in cost for control of flying debris	None
	The contractor should ensure that noise levels emanating from machinery, vehicles and noisy construction activities are kept at a minimum for the safety, health and protection of people in the nearby buildings.	Construction activities generate permissible levels of noise.	Patients and health workers do not complain about noise during construction	During construction	MOH; Contractor	Negligible	None
	Construction workers and drivers should be sensitised to switch off Equipment, machinery and vehicle engines when not in use and/or offloading materials.	Minimized noise and vibration at the project site.	Patients and health workers do not complain about noise and vibration during construction	•	MOH; Contractor	Negligible	None
	Construction activities should be carried out during the day	Afford hospital community noise-free night time to rest	No complaints of restless nights due to noise and vibration from project activities.	During construction	MOH; Contractor	Negligible	None
6.2.2.4	Disruption of laboratory ser	vices		-	·	•	-
	Plan pre-construction activities early to identify suitable rooms or adjoining buildings into which the microbiology laboratory can	Microbiology laboratory relocated to a conducive room(s) with minimal interference of diagnostic services.	No complaints about service delivery	Before construction activities	МОН	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	be relocated with minimal inconvenience						
6.2.2.5	Indoor air quality deterioration Contractors should use dust screens or nets in windows, doorways and ventilators of rooms where demolition or other dusty construction activities are occurring.	No excessive dust emissions noted outside construction areas	No complaints of excessive dust from construction areas	During construction	MOH; Contractor	Comprised in cost for control of flying debris	None
	Ensure good housekeeping and clean construction operations where, among other necessary actions, dust should be quickly swept off cement floors and collected in covered containers.	Minimise dust and exhaust emissions	No complaints of trucks ruthless driving from communities along roads used by project vehicles	During construction	MOH; Contractor	Negligible	None
	A senior healthcare administrator or superintendent at the hospital should have authority to inspect and restrain contractors from generating excessive dust within hospital environment.	No material spills on roads during haulage to sites	No accidents caused by construction material split on road	Throughout construction	MOH ; Contractor; Police	Negligible (this should be part of contractor's bid)	None
	To minimize indoor dust, portable extraction systems are recommended but they might not be available among local contractors, or lack of electricity on site might limit their use. Water sprays are not practical and could lead to indoor flooding of surrounding rooms or	Minimise dust levels	Recognition of locales of contractor's efforts to minimise dust nuisance.	During construction	MOH; Contractor	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	service areas occupied by patients.						
	Trucks shall be covered during haulage of construction materials and should be diverted away from sensitive areas of the hospital	No material spills on roads during haulage to sites	No accidents caused by construction material split on road	Throughout construction	MOH ; Contractor; Police	Negligible (this should be part of contractor's bid)	None
	Construction work should be undertaken by an experienced and duly registered contractor with a verifiable sense of environmental awareness and responsibility	Reduce dust levels in off- site locations	No complaints of dust from neighbouring wards and offices	Throughout construction	MOH; Contractor	Negligible	None
6.2.2.5	Temporary scenic blight						
	Contractor should ensure minimal footprint of construction activities.	Project workers and activities restricted to construction site	Workers and materials not found at locations away from construction site	Throughout construction	MOH; Contractor	Negligible	None
6.2.2.6	Occupational health safety	(OHS) for contractors				1	1
	Orient all construction workers on safe work practices and guidelines and ensure that they adhere to them.	Reduce OHS on construction workers	Records of workers' orientation	Throughout construction	MOH; Contractor	Negligible	None
	Training should be conducted on how to prevent and manage incidences. This should involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences. All must fully be aware and	Reduce OHS on construction workers	Records of training and Impromptu interviews with workers on OHS emergency response	Throughout construction	MOH; Contractor	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	mentally prepared for potential emergency.						
	Regular drills should constantly follow on various possible incidences. This will test the response of the involved stakeholders. Such drills will keep them alert and they will become more responsive to in the case of incidences.	Reduce OHS on construction workers	Records of drills on OHS emergency response	Throughout construction	MOH; Contractor	Negligible	None
	Use signage to warn staff and/ or visitors that are not involved in construction activities of dangerous places.	Reduce OHS on construction workers and the public	Presence of appropriate signage on-site	Throughout construction	MOH; Contractor	Negligible	None
	Supervision of works should be done regularly to ensure that safety conditions are met while any deviation from safety regulations is immediately reclaimed following the best practices regarding safety at work equipment.	Reduce OHS on construction workers	Presence of supervisor on-site	Throughout construction	MOH; Contractor	Negligible	None
	Develop evacuation procedures to handle emergency situations.	Reduce OHS on construction workers	Documented Emergency Response Preparedness Plan (ERPP)	Throughout construction	MOH; Contractor	Negligible	None
	Provide appropriate PPE to all workers not limited to;  Ear Muffs: One size fits all, comfortable, less ear infection risk  Ear Plugs: Small,	Reduce health and safety risks to construction workers	Zero injuries in any month of construction phase	Before construction commences	MOH; Contractor	USD 5,000.	Application of various types of PPE and their proper use.

Text Reference	Impact and	Desired Outcomes	Monitoring: Performance	Timing	Responsibility	Incremental	Capacity Building
	Mitigation/Enhancement		Indicators/Targets or		,	Costs (USD)	and Training
	commitments		Acceptance Criteria			, ,	Requirements
	and cause infection						
	<ul> <li>Face/Eye (Working with</li> </ul>						
	any chemical or using						
	any mechanical						
	equipment)						
	Face Shield: Protect						
	face from splashing and						
	particles						
	<ul> <li>Safety Glasses:</li> </ul>						
	Protection from solids						
	(cutting, sanding,						
	grinding)						
	<ul> <li>Safety Goggles: Protects</li> </ul>						
	eyes from splashing						
	<ul> <li>Hand (Use correct</li> </ul>						
	gloves for the job)						
	<ul> <li>Chemical Gloves:</li> </ul>						
	(Nitrile, Latex, PVC)						
	<ul> <li>Gloves for other use:</li> </ul>						
	special gloves for						
	cutting, burning,						
	abrasions/ blisters						
	Body						
	Overalls: Can protect						
	against dust, vapours,						
	splashes						
	Foot Protection						
	If electrical hazard						
	present ensure boots						
	offer protection						
	Safety Toe/Steel Toe     Destay Always warm						
	Boots: Always worn						
	when potential for falling						
	hazards exists						
	Water/Chemical						

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	Resistant Boots: Use in a spill situation  Non-slip boots for working on wet/slippery floors.						
6.2.2.7	Accidents  Adopt best transport safety practices with the goal of preventing traffic accidents and minimizing injuries suffered by project personnel and the public	No road accident by project traffic	No accident occurs in each month of construction duration	During construction	MOH; Contractor	Negligible	Contractor needs road safety awareness to project personnel and the public
	Ensure drivers respect speed limits through built areas and urban centres.	No road accident by project traffic	No accident occurs in each month of construction duration	During construction	MOH; Contractor	Negligible	Contractor needs speed awareness through built areas and urban areas
	Ensure that vehicles are regularly maintained to minimize potentially serious accidents such as those caused by brake failure commonly associated with loaded construction trucks	No road accident due to poor mechanical conditions of project vehicles.	No accident occurs in each month of construction duration	During construction	MOH; Contractor	Negligible	None
	Employ safe traffic control measures, including temporary road signs and flag persons to warn of dangerous conditions and children crossings	No road accident by project traffic	No accident occurs in each month of construction duration	During construction	MOH; Contractor	USD 500	None
	Contractors should cordon off areas under construction and provide signage to warn of on-going construction works.	cause injury to patients and health workers	Zero injuries in any month of construction phase	During construction	MOH; Contractor	Negligible	None
	Contractors should use	No debris noted outside	No complaints about flying debris	During	MOH;	USD 2,500	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	screens or nets to avoid flying debris and dust	construction areas	from construction areas (this should be verified by perusal of records in complaints log)	construction	Contractor		
6.2 (all subsections)	Impact of construction activities	Construction activities do not cause adverse socio- environmental impacts	Annual construction audits do not indicate adverse impacts not mitigated	1 time per year (NB. Estimated construction duration = 1 year per lot, see Table.20)	MOH (construction audit may be undertaken by MOH or consultant it hires)	USD 4,000	Environmental auditing of construction projects
6.3	OPERATION PHASE						
6.3.1	Positive						
6.3.1.1	Improved medical surveillar						
	Construction of laboratory facilities should be matched with commensurate staffing with laboratory personnel adequately trained in use of newly installed equipment	Installed laboratory equipment fully utilised to enhance laboratory services at the hospital.	laboratory has trained staff to properly and safely operated provided laboratory equipment	1 month after equipment installation	MOH and supplier	None (procurement cost assumed to include training)	Staff training in operation of newly installed laboratory equipment
	Reduced public risks due to improvement in laboratory waste management	Environmental audits show that medical waste and incinerator emissions do not cause onsite/ offsite public health risk	Annual environmental audits find no plume downwash from incinerators.  Incinerators stacks designed based on GIIP / WBG EHS guidelines  No un-incinerated medical solid waste on premises or waste dumps	Undertake full environmental audit once per year	МОН	Environmental audit cost: USD 15,000.	Operation of incineration units;  Decontamination procedure in the laboratory
6.3.1.2	Employment opportunities	<u>I</u>	1	1	<u> </u>	1	1
	Operation of the laboratory will create additional long-	Improve laboratory services	Laboratory has adequate trained staff.	Daily	МОН	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	term technical and non- technical job opportunities for laboratory professionals, janitors, etc.						
6.3.2	Negative				•	•	
6.3.2.1	Improper waste management						T.
	Ensure proper waste management practices as recommended in the study on improvement of laboratory waste management.	No community health risk due to improper waste management	No raw medical waste is dumped at public dumps	Daily	Healthcare facility administrator/ Superintend	Negligible	None
	The collection of waste should be made at least once in 24 hours, and it should be done in such a way to minimize nuisance of smell and dust during collection and all the waste collected must be carried away from the storage site to an approved disposal point.		No smell or accumulated waste in and around the laboratory	Daily	Hospital administrator/ Superintend	Negligible	None
	Provide appropriate waste bins for the different types of waste generated in the laboratory to allow segregation and collection at the point of generation.	litter.	Presence of adequate waste bins in and around the laboratory facility	Daily	Hospital administrator/ Superintend	Negligible	None
	Hospital/ Laboratory staff should be trained or educated on the importance and means of waste management and handling during operation.	Proper waste handling and management	Presence of labelled waste bins on-site	Daily	Hospital administrator/ Superintend	Negligible	None
	The hospital administration	Proper waste disposal	Documentation of formal	Monthly	Hospital	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	should work together with a private refuse handlers and the Municipal Council to facilitate sound waste handling and disposal from the site noting that hazardous waste must not be mixed with municipal waste.		engagement of refuse handlers		administrator/ Superintend		
	Laboratory should have standard operation and decontamination procedure manuals and clearly displayed at appropriate point(s) with the laboratory	Efficient containment of pathogens	Display at appropriate point(s)	Daily	Hospital administrator/ Superintend	Negligible	None
6.3.2.2	Air pollution  The laboratory will ensure that operator of incineration unit is properly trained and the incinerator shall be operated at its design temperatures and combustion air supply;	No offsite air pollution from incineration (such as due to plume downwash).	Visual observation reveal no plume downwash of stack emissions	From start of use of new incinerators	MOH; Hospital administrator	Negligible	None
	Ensure Training of Incinerator operators for efficient and proper incineration units operations.	Incineration does not generate dioxins	Incinerator operator complete training course	1 month before commissioning incinerator	МОН	USD 1,000	Operation of incineration unit/ facility
	The laboratory will be equipped with bio-safety areas and have a ventilation system that fulfils standards of biosafety;	Pathogen containment	Presence of bio-safety areas	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None
	Adequate fuel should be provided so that waste is incinerated immediately						

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	upon generation to avoid unnecessary accumulation to render the unit inadequate						
	All exhaust air from the laboratory shall pass through high efficiency particulate air filters	Pathogen containment	Presence of air filters	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None
6.3.2.3	Occupational health and sa	fety risks		•	1	•	•
	All workers to be Provided with appropriate PPE against exposure to infectious pathogens, hazardous chemicals and ionizing radiation in accordance with recognized international safety standards and guidelines.		PPE.	,	Healthcare facility administrator/ Superintend	Negligible since all requisite PPE to be provided as part of by equipment supplier bid.	None
	Orient all staff on safe work practices and guidelines and ensure that they adhere to them.	Reduce staff OHS	Records of staff orientation on safety practices and guidelines	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	Safety practices and guidelines
	Training should be conducted on how to prevent and manage incidences. This should involve proper handling of electricity, water etc. and sensitization on various modes of escape, conduct and responsibility during such incidences	Reduce incidences in and around laboratory facility	Records of staff training on prevention of incidences	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	Prevention and manage incidences.
	Regular drills should constantly follow on various possible incidences. This will test the response of the involved stakeholders. Such	Staff preparedness to combat possible incidences	Records of incidence prevention drills	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None

Text Reference	Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	drills will keep them alert and they will become more responsive to in the case of incidences.						
	Use signage to warn staff and/ or visitors that are not involved in laboratory work of dangerous places	Public and other staff safety	Presence of appropriate and clear signage in and around laboratory facility	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None
	Develop evacuation procedures to handle emergency situations.	Public and other staff safety	Evacuation procedure document	Throughout laboratory operational life	Hospital administrator/ Superintend	Negligible	None
6.3.2.4	Risk of fire outbreak  Fire extinguishers to be provided at strategic locations within the laboratory and ensure that all fire-fighting equipment are regularly maintained and serviced	Laboratory has basic capacity to fend off a small or average fire outbreak	Laboratory has a minimum of 2 medium-size fire extinguishers (one of which should be for electrical fires)	During equipment installation upon completion of construction/ renovation works	МОН	USD 1,500 (100 per extinguisher)	Basic firefighting skills
	Laboratory facility will have a fire emergency management plan and key healthcare staff shall have training in fire control through regular firefighting drills	Laboratory has basic capacity to fend off a small or average fire outbreak	At least 2 medical staff have certificate of basic firefighting.	During equipment installation upon completion of construction/ renovation works	MOH	To be provided as part of by equipment supplier bid.	Fire drills
	Fire emergency telephone numbers should be displayed in communal areas.	Laboratory has capacity to contact fire department in case of major fire outbreak	Fire emergency telephone numbers displaced in at least 2 communal areas	Throughout operation life of laboratory	МОН	Negligible	None

Text Reference	Impact and Mitigation/Enhancement commitments	Desired Outcomes	Monitoring: Performance Indicators/Targets or Acceptance Criteria	Timing	Responsibility	Incremental Costs (USD)	Capacity Building and Training Requirements
	Automatic fire alarm system for the entire laboratory will be installed and water hose reels installed in the laboratory.	Laboratory has basic capacity to fend off a small or average fire outbreak	Presence of automatic fire alarm system, adequate water hose reel and reverse water tank equipped with automatic booster pump	Throughout operation life of laboratory	МОН	Negligible	None
	Fire hazard signs such as 'No Smoking' signs will be provided. Directions to exit in case of any fire incidence and emergency contact numbers shall be provided. The contact/emergency numbers shall be displayed within the laboratory	Laboratory has basic capacity to fend off a small or average fire outbreak	Presence of fire hazard signs and exit in appropriate points	Throughout operation life of laboratory	МОН	Negligible	None
TOTAL COST	,		•		•	USD 29,500	

## 9 CONCLUSION

The proposed project has potential to significantly improve quality of laboratory services and efficiency of service provision in the Mbale region with socio-environmental benefits such as reduced morbidity and increased productivity of labour hence higher household incomes; opportunity to have access to laboratory services hitherto unavailable at Mbale Regional Referral Hospital due to lack of equipment or facilities. Besides, project development and operation will provide considerable economic opportunity for material/ equipment suppliers, construction contractors and medical professionals.

Key significant negative impacts will arise from laboratory waste handling and management, especially within the laboratory facilities and incineration. There was already evidence of inappropriate handling of general medical waste. A standard height of the incinerator stack should be adopted given the density of habitation and nature of nearby buildings including a school, TB and psychiatric wards. Without this, there is a risk of chronic exposure to incineration emissions due to plume downwash. Likewise, when laboratory management adopt standard pathogen containment and decontamination protocols, there is a risk of infection from residual pathogens. Where raw medical waste continues to be improperly dumped at public dumps the project would aggravate public health risk when children or people rummage through potentially infectious waste. These impacts would be accelerated by inadequately trained incinerator operators, laboratory staff and poor laboratory practices. Therefore, in order to avert such impacts during operation of the laboratory facilities, the recommended mitigation measures should be adhered to.

All potential adverse impacts are litigable when measures proposed (Chapter 6) are implemented, in which case benefits of this project to the nation would by far outweigh potential negative effects.

## **REFERENCES**

- 1. American Institute of Architects (AIA). 2001. Guidelines for Design and Construction of Hospital and Health Care Facilities. Washington, DC: AIA. Available at http://www.aia.org/
- 2. An Ounce of Prevention: Waste Reduction Strategies for Healthcare Facilities, Hollie Shaner, Glenn McRae and Connie Leach-Bisson. Contact American Hospital Association at 1-800-AHA-2626.
- 3. Australian Government, National Occupational Health and Safety Commission (NOHSC, now Australian Compensation and Safety Council (ASCC)). 2004.
- 4. Chamie G., Wandera B., Luetkemeyer A., Bogere J, Mugerwa R. D., Havlir D. V, Charlebois E.D., 2013. Household Ventilation and Tuberculosis Transmission in Kampala, Uganda. *Int J Tuberc Lung Dis.* 17(6):764-770. DOI: 10.5588/ijtld.12.0681.
- 5. Dying from Dioxin: A Citizens Guide to Reclaiming Our Health and Rebuilding Democracy Lois Gibbs South End Press.
- 6. European Environment Agency (EEA), 2002. EMEP/CORINAIR Emission
- 7. GoU. "UNGASS country progress report-Uganda." 2008.
- 8. Guidebook for Hospital Waste Reduction Planning and Program Implementation, Hollie Shaner and Glenn McRae. Contact American Hospital Association at 1-800-AHA-2626.
- Guides to Pollution Prevention: Selected Hospital Waste Streams US EPA Publication EPA/625/7-90/009.
- 10. Health Care without Harm. 2001. Non-Incineration Medical Waste Treatment Technologies. Washington, DC: Health Care without Harm. Available at http://www.noharm.org/
- 11. Incineration. Seville: EIPPCB. Available at http://eippcb.jrc.es/pages/FActivities.htm
- 12. Inventory Guidebook. Group 9: Waste Treatment and Disposal. Incineration of Hospital Wastes, Activity 090207. Emission Inventory Guidebook. Copenhagen: EEA.
- 13. Ministry of Water & Environment, 2010. Water Supply Atlas, Republic of Uganda.
- 14. MOH. National Health Policy. Kampala: Republic of Uganda, September 1999.
- 15. MOH. National Health Policy -National Planning Authority (NPA) of the Republic of Uganda, towards a modern, industrialised and knowledge based society: Working draft for national dialogue. Kampala: Republic of Uganda, June 2005.
- 16. National Environment Management Authority (NEMA), 1997: Environmental Impact Assessment Guidelines for Uganda.
- 17. Noel De Nevers, 1995: Air pollution Control Engineering, Mcgraw-Hill, New York.
- 18. NPA. Vision 2035, towards a modern, industrialized and knowledge based society: Working draft for national dialogue. Kampala: Government of Uganda, June 2005.
- 19. Policy Paper. Geneva: WHO. Available at <a href="http://www.who.int/water\_sanitation\_health/medicalwaste/en/hcwmpolicye.pdf">http://www.who.int/water\_sanitation\_health/medicalwaste/en/hcwmpolicye.pdf</a>
- 20. Preventable Poisons: A Prescription for Reducing Medical Waste in Massachusetts. A report by Greater Boston Physicians for Social Responsibility and the Toxics Action Centre.
- 21. Professional Development Series, "Becoming a Mercury Free Facility: A Priority to be Achieved by the Year 2000", by Hollie Shaner. Catalogue #197103.
- 22. Russell, Dick. "Health Problem at the Health Care Industry." The Amicus Journal Winter 2000: 34-39.

- 23. Russell, Tiller. "Environmental concerns prompt incinerator permit challenge." Montclarion 15 August 1997: 3.
- 24. Tchobanoglous. G, Theisen. H and Vigil. S, 1993: Integrated Solid Waste Management, McGraw-Hill, New York.
- 25. The safe disposal of hazardous waste: The specific problems of developing countries, WB/UNEP/WHO, ISBN-O-8213-1144-1, 1989.
- 26. UBOS, 2012. Mbale District Socio Economic Report, Volume II.
- 27. UN-Habitat, 2012. Mbale municipal profile. Available at <a href="http://www.unhabitat.org">http://www.unhabitat.org</a>
- 28. WHO. 1999. Safe Management of Wastes from Healthcare Activities. Eds. Pruss, A. Giroult, and P. Rushbrook. Geneva: WHO. Available at <a href="http://www.who.int/water\_sanitation\_health/medicalwaste/wastemanag/en/">http://www.who.int/water\_sanitation\_health/medicalwaste/wastemanag/en/</a>
- 29. World Health Organization (WHO). 2004. Safe Health-care Waste Management.
- 30. Writing a Waste Reduction Plan for a Health Care Organization, By Keith Ridley, University of Tennessee Centre for Industrial Services, 1995.

# **APPENDIX A: STAKEHOLDER ENGAGEMENT**

Meeting 1: Mbale Referral Hospital

Meeting with:	Name/ Contact	Designation	
	Mr. Bwonyo Patrick, +256772361593	Senior Laboratory Technician	
	Mr. Sisye David, +256752620455	Senior Laboratory Technician	
	Dr. Wamme, +256772479245	H.D	
	Mr. Louis Mulundo, +256773277355	Principal Hospital Administrator	
	Mr. Henry Okidi, +256712943666	Principal Laboratory Technician	
Present:	Dr. Herbert Kalibbala (AWE),Team Leader Charity Tushemereirwe (AWE)		
Issues arising	<ul> <li>Charity Tushemereriwe (AWE)</li> <li>The space allocated for the conference room is too small. It is designed to hold 15 people but the hospital plans to use it as a training hall for the students and a minimal class supports 25 students</li> <li>The blood bank design does not cater for a resting place for persons who have donated blood</li> <li>The space allocated for the Wash up room is a bit small</li> <li>Waste at the hospital is handled by the contracted firm Green Lab</li> <li>On the off chance the hospital has no electricity, chemicals are used to sterilise the waste and the waste is then handed to Green Lab firm after</li> <li>The design for the Microbiology should include safety hoods to allow for bugs to get out</li> <li>The design for the new laboratory should fit in line with the hospital's master plan</li> </ul>		
Challenges	<ul> <li>There is no incinerator on the hospital premises. The hospital just received a new incinerator but the weight per cycle (25kg) is considered too small to handle the capacity of the hospital waste</li> <li>The labs at the referral hospital utilise autoclave for initial sterilisation hence the new labs will require a new autoclave</li> <li>The laboratory centre covers 14 districts. Specimens from outbreaks from these districts are brought to the centre. These outbreaks are common in the rainy seasons but the lab capacity is not enough to handle all these specimens</li> </ul>		

Date:18/04/2013

## Stakeholder consultation record:

Name of agency/stakeholder/community:	ABALT REGIONAL	HOSPITAL	
	Scoping:	ESIA:	П
Purpose of consultation (tick appropriate box):	Sensitisation:	RAP:	
	Environmental Audit:	Other (specify):	
Date:			
Project name: EAST AFRICAN	PUBLIC HEALTH LAS	B METWORKING PROJECT	
Proponent:	/	PRA	
Name of person/ official met:	Designation	Contact (Tel/email)	Sign/ initial
Bronzo Patricle	Sen. Lab. Tech		yalvoico (no)
Siste David	Sch. Lod- Tech	0752620455 6 3210	ge along
& Wanne Rus	H& ween	772479268	The state of the s
Mr. Louis Dulurch	Prisipal Hosp 1	Adm. 0773277355	Televa
OICIDI HEXINY	PRINCIAL LAS	0712943666	(948)
	10		

Air Water Earth www.dwe-engineers.com ISOSC01-2008



Stand Doc Yo AWE/G3/

# **Meeting 2: District Health Offices**

Meeting with:	Name	Designation	
	Mrs. Jennifer Wandanea, +256782134325	Assistant Health Officer-MCH/Nursing	
Present:	Dr. Herbert Kalibbala (AWE),Team Leader		
	Charity Tushemereirwe (AWE)		
Issues arising	<ul> <li>The lab space at the referral hospital is not enough to handle specimens in the case of outbreaks</li> <li>Local capacity at lower facilities is an issue</li> <li>Epidemic preparedness of the lab is poor and appropriate equipment is inadequate</li> <li>The participation of lower labs is poor and the labs are far from the centre</li> <li>Lad waste should be decontaminated before disposal however disinfection chemicals in the area are inadequate</li> <li>There has been continues training of staff</li> <li>There is a preference for natural light in the labs due to the unreliability of grid electricity in the area. The hospital might use diesel generator in case of power shortages but fuel prices are high. These fluctuations affect lab equipment</li> </ul>		
Challenges	<ul> <li>The transportation of samples from the areas of outbreaks has been challenging</li> <li>Facilitating medical personnel in the area to transport samples is a challenge</li> <li>Hospitals lack adequate PPE to handle epidemic outbreaks and handling of specimens</li> <li>Lack of training for medical personnel and the willingness of communities to allow sampling on corpses is low</li> <li>Public awareness is poor on handling samples</li> <li>Acute shortage of water in the area makes lab processes difficult to conduct</li> <li>Record tracking of lab data is still a challenge</li> </ul>		

**Meeting 3: Mbale Municipal Council Offices** 

Meeting with:	Name/ Contact Designation		
	Ms. Joy Wanana, +256751862967	Ag. Town Clerk	
	Mr. P.W. Wamboga, +256392943059 Ag MoH/PHY		
	Mr. Johnson Masaba, +256701098980	Assistant Town Engineer	
Present:	Dr. Herbert Kabenge (AWE),Team Leader		
	Eng. Dr. John Baptist Kirabira, Energy Specialist	t	
	Charity Tushemereirwe (AWE)		
Issues arising:	<ul> <li>Lab staff in the area is concerned about their safety due to inadequate PPE</li> <li>Labs in Mbale area are not sufficiently equipped</li> <li>Water supply in the area is good</li> <li>Though the municipality has a compost waste facility which does not receive hazardous/ medical waste.</li> </ul>		
	<ul> <li>Skip was provided to the hospital for domestic waste collection.</li> </ul>		
Challenges:	<ul> <li>Financing for health services in the area is poor</li> </ul>		
	<ul> <li>Unreliable power source in the area so storage of vaccines is a challenge</li> </ul>		
	<ul> <li>Hospital has a challenge of handling its medical waste</li> </ul>		

# Meeting 5: TASO laboratory

Meeting with:	Name Designation		
	Mr. Peter Balayo, +256701875988 Medical Laboratory Scientist		
Present:	Dr. Herbert Kalibbala (AWE),Team Leader		
	Charity Tushemereirwe (AWE)		
Issues arising:	The laboratory disposes its waste through the microbiology lab		
	<ul> <li>Infectious waste is handled by Green Lab</li> </ul>		

# **Meeting 4: District Environmental Officer**

Meeting with:	Name	Designation	
	Ms. Anna Nakayenze, +256772555387	Senior District Environmental Officer	
Present:	Dr. Herbert Kalibbala (AWE),Team Leader		
	Charity Tushemereirwe (AWE)		
Issues arising:	<ul> <li>Ministry of health has waste management</li> <li>The layout of the site needs to be considered next to the laboratory</li> <li>There is a need to verify if the land on which surveyed</li> <li>New technologies to be introduced in this</li> <li>The design plans should include a factor of scarcity in the area</li> <li>The designs of the lab need to comply with waste in the district is handled by burning</li> <li>To avoid immigration of workers for the conformation of workers for the conformation of the conducive</li> <li>The contractor should consider the nature building materials might not be conducive</li> <li>The contractor needs to take into account because the demand of firewood is on high effects to the environment</li> <li>Sand from the riverbank is not of good questing the site during construction phase and this</li> <li>The contractor should put up signage to make the site during construction phase and this</li> <li>The contractor should hind noise pollution</li> <li>Demolition of the microbiology lab will formarise</li> <li>The contractor should consider depositing the roads as waste handling management</li> </ul>	ich the laboratory is to be constructed is project need to be reviewed and noted of water harvesting due to the issue of water that the Physical Planning Act is due to lack of an incinerator construction process, local labour should take to of building materials used because local for the designs the use of firewood for brick making is the use of firewood for brick making in demand and this could cause adverse ality as a building material manage traffic especially at the entry gate of is will lead to the control of dust is as a result of the construction in debris hence waste management issues is, levelling and compacting the mortar on the technique icipality before any mortar can be deposited way to mitigate the impact of cutting trees oned to transport the debris from the eved to be adhered to hence some kind of	
	unlawfully		
Challenges	The structure layout should be examined.		
Challenges:	<ul> <li>The district has no functional incinerator hence the hospital might have a problem dealing with waste management</li> <li>There is no data in the district on how expired drugs and medical waste is monitore and disposed</li> </ul>		

## Stakeholder consultation record:

	Scoping: Scoping:	ESIA:		
Purpose of consultation (tick appropriate box):	Sensitisation:	RAP:		
	Environmental Audit:	Other (specify):		
Date: 18 04 2013	-			
Project name: ESIA PUBLIC HEAL	714			
Proponent:				
Name of person/ official met:	Designation	Contact (Tel/email)	Sign/ initial	
Jamijor Wandarea	17-LITH - MCH   NW	NOT COTESTANTO-	MOaa	
P.w. Wan bogg	Agrust 1 PH	0392943059	a-	
Nakayerze Anna	S. Env. Officer-Mb	0772555387	Dog.	
BALAHO PETER COLLINS	MEDICAL LAS SCIENTIST	(%) 0701 87 5988	-fy-0.c	
	-			
			_	

Air Water Earth www.awe-engineers.com ISO9001.2008



Stand Docino AWE/03/

## APPENDIX B: ASSESSMENT REPORT ON INCINERATORS

## ASSESSMENT OF INCINERATORS TO BE INSTALLED ON-SITE

### **WASTE CATEGORIES**

Waste Category	Estimated Percentage of	Remarks
	Total Composition	
Bandages, linen and other infectious	25 – 30%	Should be incinerated
waste and related pathological waste.		
Plastics	7 – 10%	Should be incinerated
Sharps: Needles, infusion sets, blades	0.5 – 1%	Should be incinerated
Glass, vials, etc.	3 – 5%	Should be incinerated
General waste (domestic waste)	40 – 50%	A municipal damping site could be
		used for disposing.

#### TREATMENT TECHNOLOGIES AND DISPOSAL ISSUES

a) Low-technology combustion: Some fractions of healthcare wastes, and in particular used injection equipment, are burned in the open air or in simple (and sometimes improvised) units such as pits, burners (made out of brick or cement), and in drums. The units obviously are relatively inexpensive, are easy to build, and require little or no maintenance. Because of the relatively uncontrolled conditions under which the combustion takes place, the process reaches only what is considered to be low temperatures (about 400 °C or below). Combustion at these temperatures does not completely burn all of the wastes, particularly if the wastes contain relatively high moisture content.

As can be seen from Figures 2 and 3, some glassware and needles may remain relatively unchanged at the completion of the combustion process. Furthermore, the uncontrolled process may not destroy all of the pathogens. This type of combustion does not control any type of emissions (particulate matter, heavy metals, and others) and, in fact, may lead to the production of relatively high concentrations of toxic organic compounds. Whole vaccine vials and similar glass containers have the tendency to explode and thus pose an additional risk to the person tending to the combustion process.

- b) Incinerators were not properly operated; in one case a lot of carbon was evident confirming incomplete combustion.
  - Lack of close monitoring and inadequate maintenance creating threat to general public
- c) The common collection points are badly managed and are insecure due to lack of proper cordoning and surveillance. Some animal also come to feed from the site.
- d) The incinerators are of low capacity. The waste generation stands at an average of 2 kg/bed/day. Hospitals like Mbale have over 400 beds, thus generate over 800 kg of waste per day of which 400 kg (50% hazardous) should be incinerated every day.
- e) Incinerator operated more like a back-yard burner, do not reach required temperature, and lack control equipment to capture targeted pollutants such as dioxins, mercury, cytotoxic emissions
- f) Inadequate ash treatment and handling (disposed in municipal dumpsite). See Figure 3.
- g) Open dumps: At the present time, the most common method of land disposal of solid wastes is the open dump. Because of the uncontrolled nature of disposal, this method obviously is the least costly option, but at the same time, it is the one that causes the most negative impacts to the public and to the environment.
- h) Wastes not segregated and disposed of together with municipal/domestic solid waste. Mixing of hospital wastes with general

- Lack of segregation is making whole waste stream hazardous
- No regulated disposal sites for medical Waste
- Open burning in hospital compounds (some burning sites are close to wards and in the hospital periphery they are markets, schools, and farms.
- i) Residues from maternity wards (placenta) and immunization (primarily needles and syringes) generally are managed through burial in specific pits with a cover.

### **RECOMMENDATIONS**

## Medium- and high-technology combustion recommended for incineration

Medium-technology combustion is defined as that which in some manner attempts to control the combustion process and, therefore, provides slightly better air pollutant control than that achieved by the low-technology options. There are some relatively simple and not excessively expensive units available in the marketplace that fit into this category. In essence, the units generally have a small capacity, are operated in batches, and do not include any type of air pollution control equipment.

High-technology combustion is defined as the combustion of healthcare waste under controlled conditions, using equipment that operates at temperatures on the order of 900 - 1010 °C, and that includes air pollution control equipment as well as other components to manage the emissions from the unit. These units generally include a second chamber (known as secondary chamber) in which the off (by-product) gases from the first chamber are treated at high temperatures by means of an ancillary burner. High-technology combustion essentially provides the necessary conditions (temperature, time, and turbulence) to achieve complete combustion and to keep the concentration of undesirable compounds to a minimum. These types of incinerators operating in developing countries do not usually have post-combustion air pollution control systems.

### **Incineration Capacity**

The Current incinerators are of low capacity. A bigger capacity incinerator of at least 500 kg/day is recommended for individual hospitals.

## Open Dumping and burning discouraged

Consequently, open dumping should be discontinued as soon as possible and in particular should not be used for the disposition of untreated healthcare wastes because of the potential risks to the public and to the environment. Open dumps, at the very least, should be upgraded as soon as possible to controlled landfills and eventually to sanitary landfills.

### Segregation and handling of generated waste

- Reducing the toxicity of waste reduces the threat to the general public from medical waste
- Segregation reduces the volume and toxicity of waste stream;
- Increasing awareness of hospital staffs, employee training in hazardous materials management and waste minimization
- Establishment of better communication and sharing information about the risks from medical waste among all shareholders (hospitals, other medical facilities, community and public) is very important



Figure 1: Open air burning. Smoke can be see all over and there are hospital wards and other activities as can be seen in the background of this image



Figure 2: The bottles and vials are not burned completely




Figure 3: Incomplete combustion as exhibited in the ash content and the soot on the incinerator door


.

# **APPENDIX C: PROJECT ARCHITECTURAL DRAWINGS**

See next page

# Site Layout

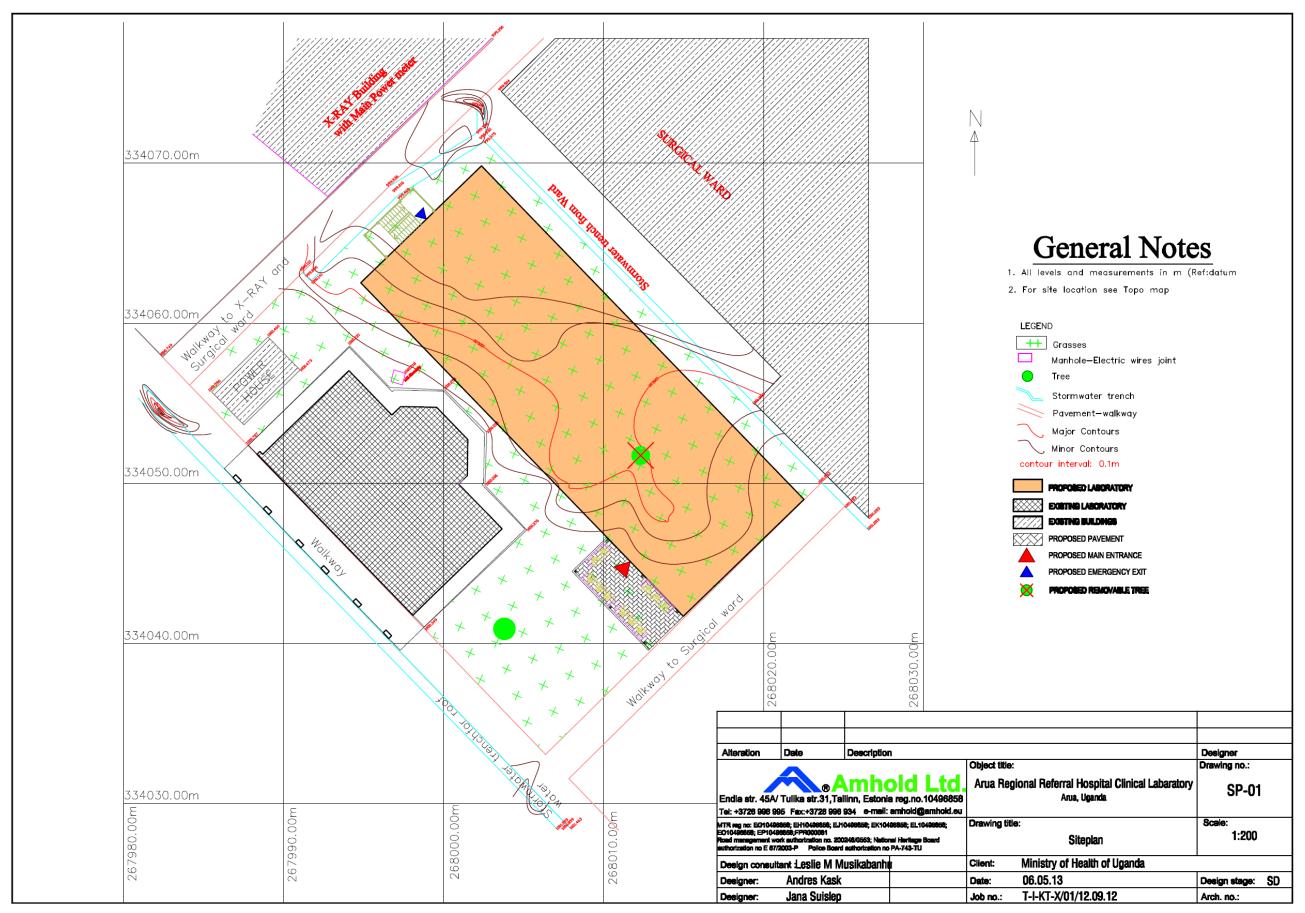

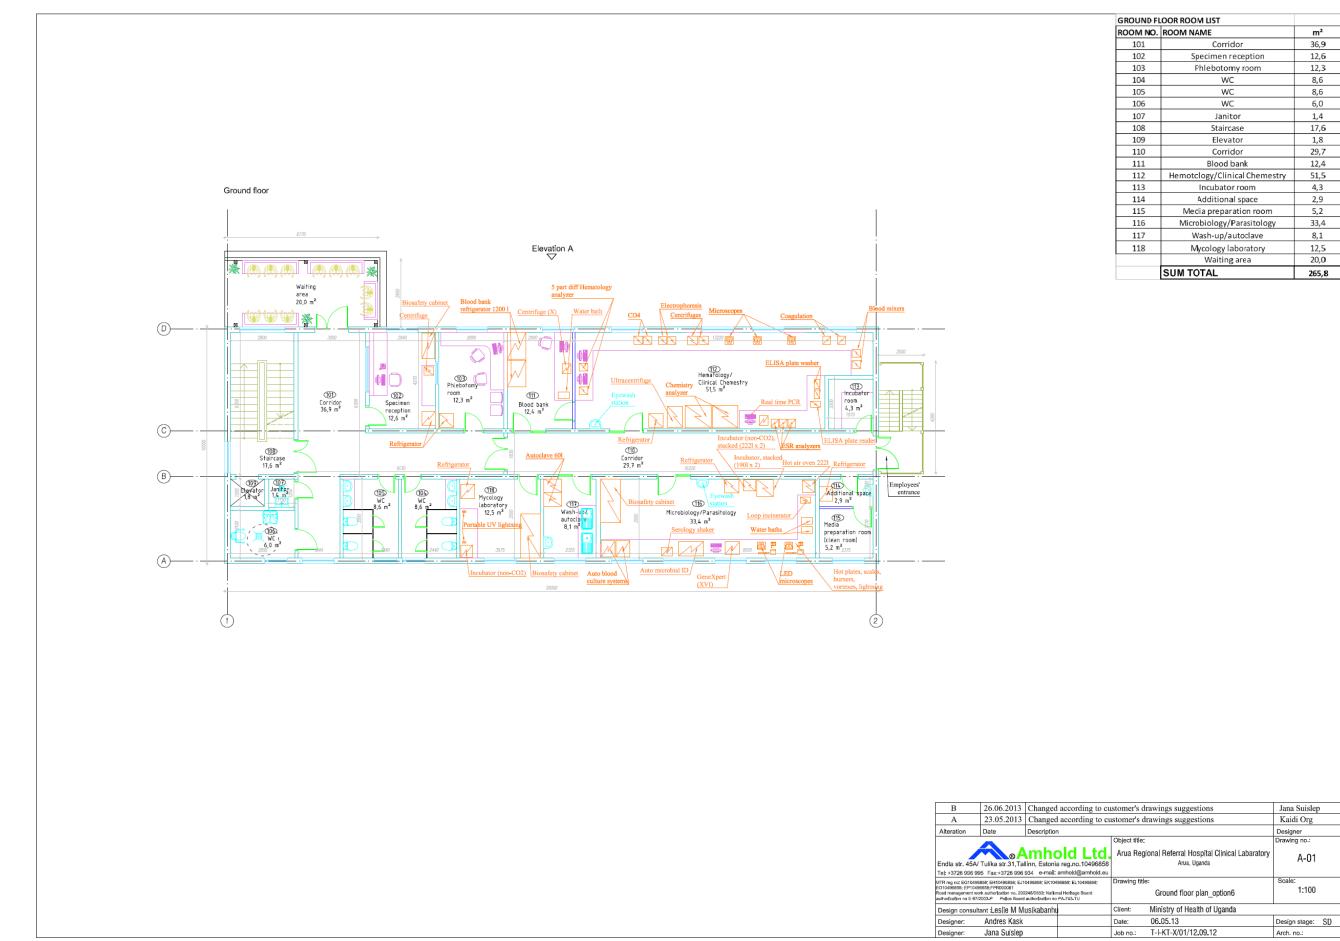

m² 36,9

12,6

12,3

8,6

8,6

6,0 1,4

17,6

1,8

29,7

12,4

51,5

4,3

2,9

5,2

33,4

8,1

12,5

20,0

265,8

Jana Suislep

A-01

1:100

Kaidi Org

## APPENDIX D: TERMS OF REFERENCE FOR THE ESIA



## NATIONAL ENVIRONMENT MANAGEMENT AUTHORITY (NEMA)

NEMA/4.5

16th January, 2014

The Permanent Secretary, Ministry of Health, Plot 6/7 Lourdel Road, Kampala, P. O. Box 7272, KAMPALA.

Tel: +256 (0)414 340872

NEMA House Plot 17,19 & 21, Jinja Road. P.O.Box 22255, Kampala, UGANDA.

Tel: 256-414- 251064, 251065, 251068 342758, 342759, 342717 Fax: 256-414-257521 / 232680

E-mail: info@nemaug.org Website: www.nemaug.org

RE: REVIEW OF SCOPING REPORT AND TERMS OF REFERENCE PERTAINING TO THE PROPOSED NATIONAL TUBERCULOSIS REFERENCE LABORATORY, AT BUTABIKA, KAMPAIA

This is in reference to the letter this Authority received on 28<sup>th</sup> November, 2013, submitting the Scoping Report and Terms of Reference (TOR) for carrying out an environment impact assessment (EIA) for the proposed construction/rehabilitation of the National Tuberculosis Reference Laboratory, on Plot 2, Block 237-2383, in Butabika Hospital Village (LC-1), Butabika Parish, Nakawa Division, Kampala District, for review and consideration for approval. This Authority has finalised the review and grants formal **APPROVAL** of the said Scoping Report and TOR.

Please, note that approval of the Scoping Report and TOR <u>DOES NOT give you permission</u> to start implementing any of the proposed project activities.

In addition, you advised to be mindful of the need to consider some of the key aspects highlighted below, during the conduct of the EIA and preparation of the EIA report, respectively.

- (i) Carry out comprehensive consultations with all the relevant key stakeholders including the Kampala Capital City Authority, the Ministry of Works and Transport, and the local communities in the neighbourhood; and, ensure that the views of the aforementioned categories of stakeholders are well documented and appended to the EIA report.
- (ii) Provide comprehensive baseline data/information relating to the project sites/areas and its immediate surroundings, and a set of coloured photographs showing the current state of the proposed project site.
- (iii) Outline the proposed phases of development of the said project area in relation to the proposed five satellite laboratories, and indicate what phase(s) the proposed EIA is focusing on – that is, whether only the Butabika site, or Butabika site plus other five sites (note that separate EIAs will be required for the proposed five satellite laboratory sites)
- (iv) Provide comprehensive description of the proposed project components, activities, and size of the workforce.

1 of 2

7/6/1/14

- (v) Ensure that soil and air quality as well noise level analyses are carried out relating to the project area, and that the baseline soil and air quality, and noise level analyses results are appended to the EIA report.
- (vi) Provide coloured, well-labelled and legible location and google maps (preferably each covering A-4 or larger paper size) that are clear, and a set of GPS coordinates.
- (vii) Include in the EIA report clear, well-labelled and legible copy of the proposed site lay-out plan (preferably covering A-3 or larger paper size), that shows clearly the boundaries of the project site and set up of the project infrastructure.
- (viii) Provide comprehensive analyses of alternatives in terms of project design, location, technology, among other aspects.
- (ix) Provide detailed evaluation of the potential environmental impacts and risks associated with the proposed project components and activities.
- (x) Provide comprehensive mitigation and environmental monitoring plans (preferably in table matrix format), respectively, that relate to the identified potential environmental impacts associated with the proposed project.
- (xi) Consider any other critical environmental aspects/concerns not initially foreseen during the preparation of the Scoping Report and TOR, and <u>include an evaluation of such aspects/concerns in the EIA report</u>.
- (xii) Append to the EIA report copies of the authentic land acquisition/ownership documents.
- (xiii) Ensure that the total project (investment) cost is included in the appropriate section of the EIA report as well as in the letter that will be used to submit copies of the EIA report to this Authority for review.

This is, therefore, to recommend that you proceed with carrying out the EIA for the proposed project. We look forward to your cooperation and receipt of copies of a comprehensive EIA report, for our further action

(NOTE: THIS IS NOT A CERTIFICATE OF APPROVAL)

Waiswa-Ayazika

FOR: EXECUTIVE DIRECTOR

Eng. Lammeck Kajubi, Air, Water Earth (AWE) Ltd., 27, Binayomba Road, Bugolobi

P.O. Box 22428, KAMPALA.

Tel: +256 (0)782 580480 / (0)772496451

2 of 2